


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
 Http://www.100y.com.tw

CR2/3AA - 6237

Lithium Manganese Dioxide

Data Sheet

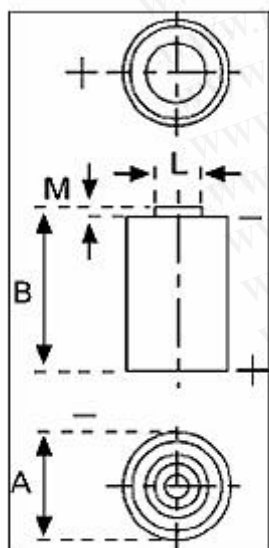

Type Number	6237
Designation IEC	---
System	Li-Manganese dioxide / Organic Electrolyte

UL Recognition	MH 13654 (N)
Nominal Voltage	3 V
Typical Capacity C	1350 mAh
	Load 1.0 kOhm, at 20°C down to 2.0 V

Weight (approx.)	15 g
Volume	5.6 ccm
Coding	Date of Manufacturing Quarter / Year

Temperature Ranges	Min	Max
Storage	-55°C	75°C
Discharge	-30°C	75°C

Dimensions	Min	Max
Diameter (A)	11.45	14.75
Height (B)	33.1	33.5
Shoulder Diameter (E)	7	
Shoulder Height (C)	0.6	

Segment	Electronic
---------	------------

Main Applications	Electronic
-------------------	------------

Typical Capacities (at 20°C)

Discharge Type	Load	End Voltage	2.0 V
Continuous	1000 ohms	Time:	500h
24h/d,7d/w		Capacity [mAh]:	1350
Current [uA]:		Energy[mWh]:	3600