


Data Sheet

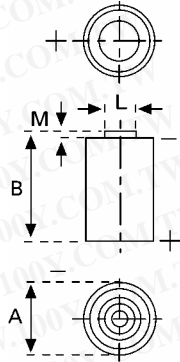

Type Number 6117
Designation IEC ---
System Li-Manganese dioxide / Organic Electrolyte

UL Recognition:..... MH 13654 (N)
Nominal Voltage 3 V
Typical Capacity C 2000 mAh
 Load 1.0 kOhm, at 20°C down to 2 V

Weight (approx.) 21,5 g
Volume 8,5 ccm
Coding..... Date of Manufacturing Quarter/Year

Temperature Ranges
 Storage min max.
 -55°C 75 °C
 Discharge -30°C 75°C

Dimensions
 Diameter (A) min max.
 14,45 14,75
 Height (B) 49,5 50,5
 Shoulder Diameter[L]..... 7
 Shoulder Height [M]..... 0,6

Segment Electronic

Main Applications Electronic

Typical Capacities (at 20°C)

Discharge Type	Load	End Voltage:	2.0 V
Continuous 24h/d,7d/w	1000 Ω	Time: Capacity [mAh]: Energy [mWh]:	745 h 2000 5600
Discharge Type	Load	End Voltage:	2.0 V
Continuous 24h/d,7d/w	620 Ω	Time: Capacity [mAh]: Energy [mWh]:	430 h 1850 5000

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

All Data contained herein is for single cells
 For battery applications, performance data may vary from single cell data, depending on specific battery configuration