



勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)



**XS16型 XS16 TYPE**

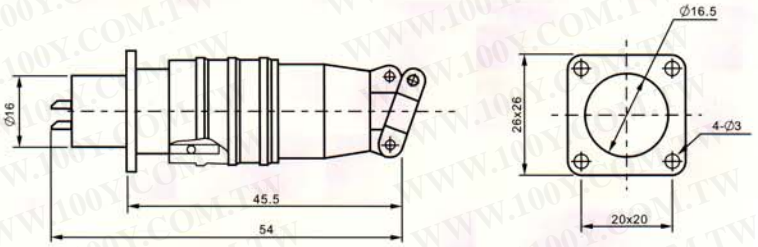

**XS16型对接式**

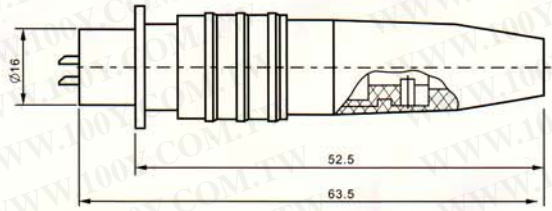

**XS16型粗针孔**

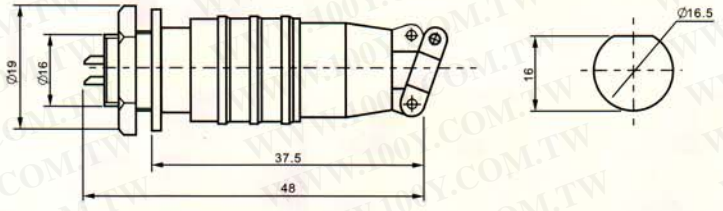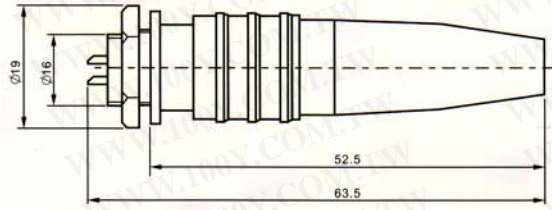

**XS16型细针孔**

SHELL SIZE (外形尺寸)	16-2	16-3	16-4	16-5	16-7	16-9	
CONTACT ARRANGEMENTS (接触对分布)							
CURRENT RATING (额定电流)	3						
WITHSTAND VOLTAGE (额定电压)	AC 500V a minute						
INSULATION RESISTANCE (绝缘电阻)	> 2000M $\Omega$						
CONTACT RESISTANCE (接触电阻)	< 5M $\Omega$						