

*QFP variations e.g. BQFP...

Series IC51 (Clamshell) QFP, PQFP, TQFP and MQUAD®

0.4mm to 1.27 Pitch

Specifications

Insulation Resistance:	1,000MΩ min. at 100V DC
Dielectric Withstanding Voltage:	for 1 minute (socket depended)
Contact Resistance:	30mΩ max. at 10mA/20mV max.
Operating Temperature Range:	-40°C to +150°C (for type PEI/PSF) -55°C to +170°C (for type PES) -55°C to +170°C (for type PEI)
Mating Cycles:	10,000 insertions min.

Materials and Finish

Housing:	Polysulphone (PSF), glass- lled Polyethersulphone (PES), glass- lled Polyetherimide (PEI), glass- lled
Contacts:	Beryllium Copper (BeCu)
Plating:	Gold over Nickel



Part Number (Details)

IC51 - 064 4 - 807

Series No.

No. of Contact Pins

Number of Sides
with Contacts

Design Number

As specifications for this product differ by pitch
and material-mix, please contact our Sales Department
for detailed information.

Series IC51 (Clamshell) Bumper Quad Flat Packages (BQFP)

0.635mm Pitch

Specifications

Insulation Resistance:	1,000MΩ min. at 500V DC
Dielectric Withstanding Voltage:	700V AC for 1 minute
Contact Resistance:	30mΩ max. at 10mA/20mV max.
Current Rating:	1A max.
Operating Temperature Range:	-55°C to +170°C
Mating Cycles:	25,000 insertions min.
Contact Force:	50g to 150g per pin

Materials and Finish

Housing:	Polyetherimide (PEI), glass- lled
Contacts:	Beryllium Copper (BeCu)
Plating:	Gold over Nickel



Part Number (Details)

IC51 - 100 4 - 827

Series No.

No. of Contact Pins

Number of Sides
with Contacts

Design Number

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Series IC211 (Open Top) Bumper Quad Flat Packages (BQFP)


0.635mm Pitch

Specifications

Insulation Resistance:	1,000MΩ min. at 500V DC
Dielectric Withstanding Voltage:	500V AC for 1 minute
Contact Resistance:	30mΩ max. at 10mA/20mV max.
Operating Temperature Range:	-40°C to +170°C
Contact Force:	20g to 80g per pin
Mating Cycles:	10,000 insertions min.

Materials and Finish

Housing:	Polyetherimide (PEI), glass- lled
Contacts:	Beryllium Copper (BeCu)
Plating:	Gold over Nickel



Part Number (Details)

IC211 - 132 4 - 002 * - *

Series No.

No. of Contact Pins

Number of Sides
with Contacts

Design Number

Positioning Pin:
N = Without Positioning Pin
Unmarked = With Positioning Pin

Protection Key*
K = With Protection Key
Unmarked = Without Protection Key

**Protection Key: Prevents IC from releasing during transportation

Series Overview

*QFP (Quad Flat Packages, Gullwing Leads)

SMT Devices

Series IC402 (Open Top) Quad Flat Package (QFP) with 2-Point Contact Type

0.5mm Pitch

Specifications

Insulation Resistance:	1,000M Ω min. at 500V DC, pitch 0.5 1,000M Ω min. at 500V DC, pitch 0.65
Dielectric Withstanding Voltage:	100V AC for 1 minute, pitch 0.5 500V AC for 1 minute, pitch 0.65
Contact Resistance:	30m Ω max. at 10mA/20mV max.
Operating Temperature Range:	-40°C to +150°C
Mating Cycles:	10,000 insertions min.
Contact Force:	20g to 45g per pin

Materials and Finish

Housing:	Polyetherimide (PEI), glass- lled Polyethersulphone (PES) glass- lled
Contacts:	Beryllium Copper (BeCu)
Plating:	Gold over Nickel



Part Number (Details)

IC402 - 100 4 - 002 *

Series No.

No. of Contact Pins

Number of Sides
with Contacts

Design Number

Positioning Pin
N = Without Positioning Pin
P = With Positioning Pin

Series IC234 (Open Top) Quad Flat Package (QFP) with Shoulder Contact Type


0.4 to 0.8mm Pitch

Specifications

Insulation Resistance:	1,000M Ω min. at 100V DC pitch 0.4, 0.5 1,000M Ω min. at 500V DC pitch 0.65, 0.8
Dielectric Withstanding Voltage:	100V AC for 1 minute pitch 0.4, 0.5 500V AC for 1 minute pitch 0.65 700V AC for 1 minute pitch 0.8
Contact Resistance:	30m Ω max. at 10mA/20mV max.
Operating Temperature Range:	-40°C to +150°C
Contact Force:	20g to 80g per pin
Mating Cycles:	10,000 insertions min.

Materials and Finish

Housing:	Polyetherimide (PEI), glass- lled Polyethersulphone (PES) glass- lled
Contacts:	Beryllium Copper (BeCu)
Plating:	Gold over Nickel



Part Number (Details)

IC234 - 120 4 - 017 *

Series No.

No. of Contact Pins

Number of Sides
with Contacts

Design Number

Positioning Pin
N = Without Positioning Pin
P = With Positioning Pin
K = Protection Key **

** Protection Key: Prevents IC from releasing during transportation

Series IC200 / IC201 / IC216 / IC217 / IC218 / IC248 (Open Top) Quad Flat Packages (QFP)

0.5 to 0.8mm Pitch

Specifications

Insulation Resistance:	1,000M Ω min. at 500V DC or 1,000M Ω min. at 100V DC
Dielectric Withstanding Voltage:	100/500/700V AC for 1 minute
Contact Resistance:	30m Ω max. at 10mA/20mV max.
Operating Temperature Range:	-40°C to +170°C and -40°C to +150°C
Contact Force:	20g to 80g per pin
Mating Cycles:	10,000 insertions min.

The information above is typical for this Series
for individual specifications please contact Yamaichi

Materials and Finish

Housing:	Polyetherimide (PEI), glass- lled Polyphenylenesul de (PPS), glass- lled
Contacts:	Beryllium Copper (BeCu)
Plating:	Gold over Nickel



Part Number (Details)

IC200 - 128 4 - 001 * - *

Series No.

No. of Contact Pins

Number of Sides
with Contacts

Design Number

Positioning Pin:
N = Without Positioning Pin
P = With Positioning Pin

Protection Key**
K = With Protection Key
Unmarked = Without Protection Key




**Protection Key: Prevents IC from releasing during transportation

cont'd next page

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Applicable Dimensions

Outline IC Body Dimensions

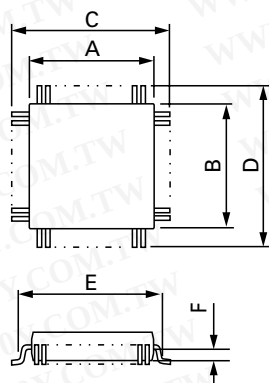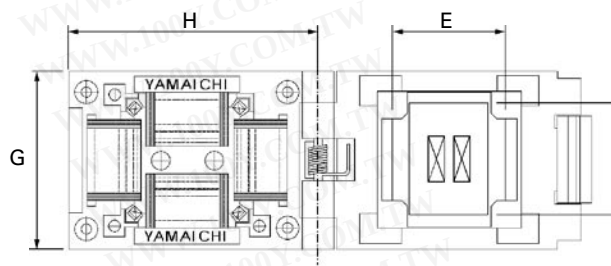Outline Open Top
Socket DimensionsOutline Clamshell
Socket Dimensions

CL = Clamshell
 OT = Open Top

0.40mm Pitch

Part Number	Pitch	Pin Count	IC Dimensions				Socket Dimensions G X H	Package Type	PCB Layout (see page)
			Body A x B	Tip-to-Tip C x D	Parallel Clamp E	1/2 - IC height F			
IC51-1204-1812	0.4	120	12.0 x 12.0	15.1 x 15.1			36.0 x 42.5	CL	
IC234-1284-043 *	0.4	128	14.0 x 14.0	16.0 x 16.0		0.562	34.0 x 34.0	OT	
IC234-1444-053 *	0.4	144	16.0 x 16.0	18.0 x 18.0		0.537	36.0 x 36.0	OT	
IC234-1564-038 *	0.4	156	14.0 x 14.0	16.0 x 16.0		0.67	38.0 x 44.0	OT	
IC234-1764-059 *	0.4	176	20.0 x 20.0	22.0 x 22.0		0.67	40.0 x 40.0	OT	
IC51-1764-1995	0.4	176	14.0 x 20.0	22.0 x 22.0	21.3		46.0 x 50.0	CL	
IC51-1764-1995-6	0.4	176	20.0 x 20.0	22.0 x 22.0	21.2		46.0 x 50.0	CL	
IC234-2164-050 *	0.4	216	20.0 x 20.0	26.0 x 26.0		0.67	44.0 x 44.0	OT	
IC234-2164-066 *	0.4	216	20.0 x 20.0	26.0 x 26.0		0.67	44.0 x 44.0	OT	
IC234-2564-020 *	0.4	256	28.0 x 28.0	30.0 x 30.0	1.40		48.0 x 48.0	OT	
IC234-2564-078 *	0.4	256	28.0 x 28.0	30.0 x 30.0	1.60		48.0 x 48.0	OT	
IC51-2564-1668	0.4	256	28.0 x 28.0	31.2 x 31.2	30.0		56.0 x 62.0	CL	
IC51-2564-1668-10	0.4	256	28.0 x 28.0	30.0 x 30.0	29.4		56.0 x 62.0	CL	
IC51-2564-1668-6	0.4	256	27.2 x 27.2	29.8 x 29.8	30.0		56.0 x 62.0	CL	

0.50mm Pitch

IC51-0324-805	0.5	32	5.0 x 5.0	7.0 x 7.0	6.2		28.0 x 31.0	CL	
IC234-0484-034 *	0.5	48	7.0 x 7.0	9.0 x 9.0		0.47	26.6 x 26.6	OT	
IC234-0484-039 *	0.5	48	5.0 x 5.0	9.0 x 9.0		0.7365	26.6 x 26.6	OT	
IC51-0484-806	0.5	48	7.0 x 7.0	9.0 x 9.0	8.2		29.0 x 32.0	CL	
IC51-0484-806-2	0.5	48	7.0 x 7.0	9.0 x 9.0	8.3		29.0 x 32.0	CL	
IC201-0644-003 *	0.5	64	10.0 x 10.0	12.0 x 12.0		0.70	30.0 x 36.0	OT	
IC201-0644-040 *	0.5	64	10.0 x 10.0	12.0 x 12.0		0.67	28.7 x 28.7	OT	
IC234-0644-027 *	0.5	64	10.0 x 10.0	12.0 x 12.0		0.66	29.6 x 29.6	OT	
IC51-0644-807	0.5	64	10.0 x 10.0	12.0 x 12.0	11.3		32.0 x 35.0	CL	
IC51-807 AC-15764	0.5	64	9.95 x 9.95	13.0 x 13.0	12.0		37.0 x 44.0	CL	
IC201-0804-014 **	0.5	80	12.0 x 12.0	14.0 x 14.0		0.62	29.0 x 29.0	OT	
IC201-0804-020 **	0.5	80	12.0 x 12.0	13.6 x 13.6		0.50	29.0 x 29.0	OT	
IC234-0804-011 *	0.5	80	12.0 x 12.0	14.0 x 14.0		0.45	29.0 x 29.0	OT	
IC234-0804-026 *	0.5	80	11.95 x 11.95	14.0 x 14.0		0.67	31.6 x 31.6	OT	
IC51-0804-808	0.5	80	12.0 x 12.0	14.0 x 14.0	13.3		34.0 x 37.0	CL	
IC51-0804-808-2	0.5	80	12.0 x 12.0	14.0 x 14.0	13.2		34.0 x 37.0	CL	
IC51-0804-808-4	0.5	80	12.0 x 12.0	14.0 x 14.0	13.4		34.0 x 37.0	CL	
IC201-1004-008 **	0.5	100	14.0 x 14.0	16.0 x 16.0		0.66	32.2 x 31.0	OT	
IC201-1004-043 *	0.5	100	14.0 x 14.0	16.0 x 16.0		0.45	31.0 x 31.0	OT	
IC216-1004-001 **	0.5	100	14.0 x 20.0	16.0 x 16.0		0.66	34.2 x 34.2	OT	
IC234-1004-023 *	0.5	100	14.0 x 14.0	16.0 x 16.0		0.67	33.6 x 33.6	OT	
IC51-1004-809	0.5	100	14.0 x 14.0	16.0 x 16.0	15.3		39.0 x 39.0	CL	

Click on radio button for PCB dimensions

Click on radio button for PCB dimensions

0.50mm Pitch (cont'd)

Part Numbers	Pitch	Pin Count	A x B	C x D	E	F	G x H	Type	PCB's
IC51-1004-809-14	0.5	100	14.0 x 14.0	16.0 x 16.0	15.3		39.0 x 39.0	CL	
IC51-1004-809-2	0.5	100	14.0 x 14.0	16.0 x 16.0	15.3		39.0 x 39.0	CL	
IC51-1004-809-6	0.5	100	14.0 x 14.0	16.0 x 16.0	15.3		39.0 x 39.0	CL	
IC201-1204-017 *-*	0.5	120	16.0 x 16.0	18.4 x 18.4		0.95	33.4 x 33.4	OT	
IC234-1204-058 *	0.5	120	16.0 x 16.0	18.0 x 18.0		0.67	35.6 x 35.6	OT	
IC51-1204-1652	0.5	120	16.0 x 16.0	18.0 x 18.0	17.6		40.0 x 43.0	CL	
IC201-026 KS-13784	0.5	128	20.0 x 20.0	22.0 x 22.0		0.685	37.0 x 36.7	OT	
IC248-1284-007 *-*	0.5	128	14.0 x 20.0	16.0 x 22.0		0.67	37.4 x 43.4	OT	
IC51-1284-1433	0.5	128	14.0 x 20.0	16.0 x 22.0	15.2 x 21.2		60.0 x 58.0	CL	
IC51-1284-1433-10	0.5	128	14.0 x 20.0	17.2 x 23.2	16.4 x 22.4		60.0 x 58.0	CL	
IC201-006 AC-04462	0.5	144	28.0 x 28.0	31.2 x 31.2		1.65	46.2 x 46.2	OT	
IC201-1444-026 *-2	0.5	144	20.0 x 20.0	22.0 x 22.0		0.685	37.0 x 37.0	OT	
IC201-1444-034 *	0.5	144	20.0 x 20.0	22.0 x 22.0		0.65	37.0 x 37.0	OT	
IC234-1444-016 *	0.5	144	20.0 x 20.0	22.0 x 22.0		0.837	37.0 x 37.0	CL	
IC402-1444-003*	0.5	144	20.0 x 20.0	22.0 x 22.0	21.3 x 21.3	0.8	30.0 x 30.0	OT	
IC51-1444-1354	0.5	144	20.0 x 20.0	22.0 x 22.0	21.3 x 21.3		43.0 x 47.0	CL	
IC51-1444-1354-7	0.5	144	20.0 x 20.0	22.0 x 22.0	21.3 x 21.3		43.0 x 47.0	CL	
IC51-1604-1350	0.5	160	24.0 x 24.0	26.0 x 26.0	25.3		46.0 x 50.0	CL	
IC217-1764-004 *-*	0.5	176	24.0 x 24.0	26.0 x 26.0		2.13	52.0 x 62.0	OT	
IC234-1764-002 *	0.5	176	24.0 x 24.0	26.0 x 26.0		1.00	46.0 x 46.0	OT	
IC234-1764-005 *	0.5	176	24.0 x 24.0	26.0 x 26.0		1.00	46.0 x 46.0	OT	
IC51-1764-1505	0.5	176	26.0 x 26.0	26.0 x 26.0	25.3	0.9	46.0 x 46.0	CL	
IC51-1764-1505-10	0.5	176	26.0 x 26.0	25.4 x 26.0	25.3	0.5	46.0 x 50.0	CL	
IC51-1764-1505-5	0.5	176	24.0 x 24.0	26.0 x 26.0	25.3		46.0 x 50.0	CL	
IC200-2084-009 *-*	0.5	208	28.0 x 28.0	31.2 x 31.2		1.40	51.2 x 52.2	OT	
IC200-2084-010 *-*	0.5	208	28.0 x 28.0	30.6 x 30.6		1.40	50.6 x 50.6	OT	
IC201-2084-001 *-*	0.5	208	28.0 x 28.0	30.0 x 30.0		1.50	45.0 x 45.0	OT	
IC201-2084-029 *	0.5	208	28.0 x 28.0	30.6 x 30.6		1.67	45.6 x 45.6	OT	
IC51-2084-1052-*	0.5	208	28.0 x 28.0				52.0 x 58.0	CL	
IC51-2084-1509	0.5	208	27.72 x 27.72	29.8 x 29.8	29.8		52.0 x 58.0	CL	
IC217-2404-007 *	0.5	240	32.0 x 32.0	34.6 x 34.6		1.75	56.1 x 56.1	OT	
IC234-2404-030 *	0.5	240	32.0 x 32.0	34.6 x 34.6		1.56	51.6 x 51.6	OT	
IC51-2404-1655-2	0.5	240	32.0 x 32.0	34.6 x 34.6	33.8		56.0 x 62.0	CL	
IC201-2564-002 *-*-2	0.5	256	28.0 x 40.0	30.6 x 40.6		1.50	45.6 x 57.6	OT	
IC51-2724-1727	0.5	272	35.92 x 35.92	37.4 x 37.4	37.6		58.0 x 72.0	CL	
IC201-3044-004 *-*	0.5	304	40.0 x 40.0	42.6 x 42.6		1.50	57.6 x 57.6	OT	
IC51-3044-1471-2	0.5	304	39.95 x 39.95	41.4 x 41.4	41.9		66.0 x 72.0	CL	
IC51-3044-1471-5	0.5	304	39.64 x 39.64	42.6 x 42.6	41.9		66.0 x 72.0	CL	

0.635mm Pitch

IC211-0844-001 *-*	0.635	84	20.4 x 20.4	19.8 x 19.8			39.8 x 39.8	OT	
IC211-1004-004 *-*	0.635	100	22.94 x 22.94	22.4 x 22.4			42.4 x 42.4	OT	
IC51-1004-827	0.635	100	22.86 x 22.86	22.35 x 22.35			47.5 x 34.0	OT	
IC211-1324-002 *-*	0.635	132	28.02 x 28.02	27.4 x 27.4			47.4 x 47.4	OT	
IC51-1324-828	0.635	132	27.94 x 27.94	27.43 x 27.43			53.5 x 40.0	OT	

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Click on radio button for PCB dimensions


Click on radio button for PCB dimensions

Click on radio button for PCB dimensions


SMT Device

Applicable Dimensions (Quad Flat Packages, Gullwing Leads)


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



Outline Open Top
Socket Dimensions



Outline Clamshell
Socket Dimensions

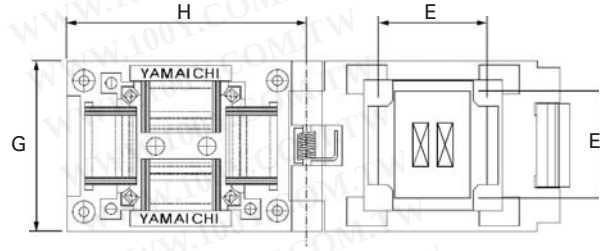

0.65mm Pitch

CL = Clamshell OT = Open Top

Part Number	Pitch	Pin Count	IC Dimensions				Socket Dimensions G X H	Package Type	PCB Layout
			Body A x B	Tip-to-Tip C x D	Parallel Clamp E	1/2 - IC height F			
IC51-0484-652	0.65	48	6.0 x 9.0	7.4 x 8.8	7.0		34.0 x 34.5	CL	
IC234-0564-084 *	0.65	56	10.0 x 10.0	12.8 x 12.8		1.50	29.3 x 29.3	OT	
IC51-0564-680	0.65	56	10.0 x 10.0	13.2 x 13.2	11.8		34.0 x 35.5	CL	
IC51-0644-1586	0.65	64	12.0 x 12.0	15.3 x 15.3	13.9		36.0 x 39.0	CL	
IC51-0644-1602	0.65	64	12.0 x 12.0	14.0 x 14.0	13.1		20.0 x 42.0	CL	
IC51-0684-734	0.65	68	10.0 x 14.0	13.2 x 17.2	11.8 x 15.8		37.0 x 41.0	CL	
IC51-0724-651	0.65	72	13.0 x 13.0	15.8 x 15.8	14.2		34.0 x 38.5	CL	
IC201-0804-005 *-*	0.65	80	14.0 x 20.0	17.9 x 23.9		1.22	32.9 x 38.9	OT	
IC201-0804-012 *-*	0.65	80	14.0 x 14.0	17.2 x 23.9		0.92	29.2 x 32.2	OT	
IC234-0804-019 *	0.65	80	13.95 x 13.95	16.8 x 16.8		1.35	32.2 x 32.2	OT	
IC51-0804-711	0.65	80	14.0 x 14.0	17.2 x 17.2	15.6		37.0 x 41.0	CL	
IC51-0804-795	0.65	80	14.0 x 14.0	16.0 x 16.0	15.3		37.0 x 41.0	CL	
IC51-0804-956-2	0.65	80	14.0 x 14.0	17.2 x 17.2	16.4		34.0 x 42.5	CL	
IC201-1004-028 *	0.65	100	14.0 x 20.0	17.2 x 23.2		1.20	32.2 x 38.2	OT	
IC201-1004-071 *	0.65	100	14.0 x 20.0	17.2 x 23.2		0.45	31.0 x 37.0	OT	
IC201-1004-072 *	0.65	100	14.0 x 20.0	16.0 x 22.0		0.70	31.0 x 37.0	OT	
IC201-1004-016 *-*	0.65	100	14.0 x 20.0	17.9 x 23.9		1.28	34.2 x 34.2	OT	
IC234-1004-008 *	0.65	100	14.0 x 20.0	18.15 x 24.15		1.33	32.2 x 32.2	OT	
IC234-1004-009 *	0.65	100	14.0 x 20.0	18.15 x 24.15		1.33	32.2 x 32.2	OT	
IC234-1004-013 *	0.65	100	14.0 x 20.0	17.2 x 23.2		1.35	32.2 x 32.2	OT	
IC234-1004-014 *	0.65	100	14.0 x 20.0	16.0 x 22.0		0.67	32.2 x 32.2	OT	
IC234-1004-015 *	0.65	100	14.0 x 20.0	16.75 x 22.75		0.67	32.0 x 32.0	OT	
IC234-1004-033 *	0.65	100	14.0 x 20.0	17.9 x 23.9		1.33	32.2 x 32.2	OT	
IC402-1004-002 *-**	0.65	100	14.0 x 20.0	16.0 x 22.0			29.8 x 23.8	CL	
IC51-1004-814-1	0.65	100	14.0 x 16.0	17.0 x 22.0	17.0 x 23.0		34.0 x 42.5	CL	
IC51-1004-814-2	0.65	100	14.0 x 20.0	17.2 x 23.2	16.4 x 22.4		34.0 x 42.5	CL	
IC51-1004-814-6	0.65	100	14.0 x 20.0		15.8 x 21.8		34.0 x 42.5	CL	
IC51-1004-814-7	0.65	100	14.0 x 20.0	17.2 x 23.2	16.4 x 22.4		34.0 x 42.5	CL	
IC51-814.KS-12033	0.65	100	14.0 x 20.0		16.4 x 22.4		34.0 x 42.5	CL	
IC201-1004-050 *	0.65	100	14.0 x 20.0	16.0 x 22.0		0.75	31.0 x 37.0	OT	
IC51-1124-1036-2	0.65	112	20.0 x 20.0	23.2 x 23.2	22.3		34.0 x 42.5	CL	
IC51-1124-1036-YED	0.65	112	20.0 x 20.0	22.0 x 22.0	21.0		34.0 x 42.5	CL	
IC234-1364-025 *	0.65	136	27.95 x 27.95	32.0 x 32.0		1.48	47.6 x 47.6	OT	
IC217-1444-003 *	0.65	144	26.0 x 26.0	30.9 x 30.9		1.90	52.0 x 62.0	OT	
IC51-1444-1014	0.65	144	28.0 x 28.0	30.0 x 30.0	30.4		44.0 x 57.0	CL	
IC51-1444-1014-3	0.65	144	28.0 x 28.0	30.0 x 30.0	30.4		44.0 x 57.0	CL	
IC201-1604-006 *-*	0.65	160	28.0 x 28.0	31.2 x 31.2		1.65	46.2 x 46.2	OT	
IC234-1604-064 *	0.65	160	28.0 x 28.0	32.8 x 32.8		1.60	48.4 x 48.4	OT	
IC234-1604-018 *	0.65	160	27.95 x 27.95	32.0 x 32.0		1.48	47.6 x 47.6	OT	
IC234-1604-032 *	0.65	160	28.0 x 28.0	30.6 x 30.6		1.66	47.6 x 47.6	OT	
IC51-1604-845-1	0.65	160	28.0 x 28.0	30.0 x 30.0	30.6		44.0 x 57.0	CL	
IC51-1604-845-2	0.65	160	28.0 x 28.0	31.6 x 31.6	30.6		44.0 x 57.0	CL	
IC51-1604-845-4	0.65	160	28.0 x 28.0	31.2 x 31.2	30.2		44.0 x 57.0	CL	
IC51-1604-845-8	0.65	160	28.0 x 28.0	31.2 x 31.2	30.2		44.0 x 57.0	CL	
IC51-1604-926	0.65	160	28.0 x 28.0	31.4 x 31.4	30.4		44.0 x 57.0	CL	

Click on radio button for PCB dimensions

Click on radio button for PCB dimensions

Applicable Dimensions (Quad Flat Packages, Gullwing Leads)

勝特力材料 886-3-5753170
勝特力電子(上海) 86-21-54151736
勝特力電子(深圳) 86-755-83298787
Http://www.100y.com.tw

SMT Devices

0.80mm Pitch

Part Number	Pitch	Pins	A x B	C x D	E	F	G x H	Type	PCB's
IC234-0324-044 *	0.8	32	7.0 x 7.0	9.0 x 9.0		0.67	26.6 x 26.6	OT	
IC51-0324-1498	0.8	32	7.0 x 7.0	9.0 x 9.0	8.4		30.0 x 35.5	CL	
IC51-0324-354	0.8	32	7.4 x 7.4	9.8 x 9.8	8.4		30.0 x 37.5	CL	
IC234-0444-037 *	0.8	44	10.0 x 10.0	12.0 x 12.0		0.45	26.6 x 26.6	OT	
IC234-0444-054 *	0.8	44	9.95 x 9.95	12.80 x 12.80		1.35	29.6 x 29.5	OT	
IC248-0444-001 *	0.8	44	10.0 x 10.0	13.2 x 13.2		0.80	27.0 x 27.0	OT	
IC51-0444-1195-3	0.8	44	10.0 x 10.0	12.6 x 12.6	11.5 x 11.5		40.0 x 40.0	CL	
IC51-0444-467	0.8	44	10.0 x 10.0	13.9 x 13.9	11.5 x 11.5		40.0 x 40.0	CL	
QFP11T044-001	0.8	44	10.0 x 10.0	12.0 x 12.0	11.3 x 11.3		32.0 x 35.0	CL	
IC51-0444-798	0.8	44	10.0 x 10.0	13.9 x 13.9	12.9 x 12.9		40.0 x 40.0	CL	
IC51-0444-825	0.8	44	10.0 x 10.0	12.6 x 12.6	11.8 x 11.8		40.0 x 40.0	CL	
IC51-467.AC-15687	0.8	44	10.0 x 10.0	12.0 x 12.0	11.6 x 11.6		37.5 x 37.5	CL	
IC51-467.KS-11787	0.8	44	10.0 x 10.0	12.0 x 12.0	11.6 x 11.6		37.5 x 37.5	CL	
IC51-467.KS-11247	0.8	44	10.0 x 10.0	13.2 x 13.2	12.1 x 12.1		40.0 x 40.0	CL	
IC51-081-KS-14028	0.8	48	12.0 x 12.0	15.3 x 15.3	14.0		36.0 x 39.0	CL	
IC51-0564-924	0.8	56	10.0 x 14.0	13.2 x 17.2	11.8 x 15.8		37.0 x 41.0	CL	
IC51-0604-361	0.8	60	16.0 x 16.0	18.3 x 18.3	16.5		37.0 x 44.0	CL	
IC51-0604-468	0.8	60	14.0 x 14.0	17.2 x 17.2	15.8		38.0 x 43.0	CL	
IC234-0644-024 *	0.8	64	14.0 x 14.0	16.8 x 16.8		1.40	32.2 x 32.2	OT	
IC51-0644-1240-2	0.8	64	14.0 x 14.0	16.5 x 16.5	15.0		42.5 x 34.0	CL	
IC51-0644-692-*	0.8	64	14.0 x 14.0	-	-		22.0 x 26.0	CL	
IC51-0644-824-1	0.8	64	14.0 x 14.0	17.2 x 17.2	15.8		30.0 x 42.5	CL	
IC51-0644-824-2	0.8	64	14.0 x 14.0	17.9 x 17.9	16.7		30.0 x 42.5	CL	
IC51-0644-824-3	0.8	64	14.0 x 14.0	16.2 x 16.2	15.4		30.0 x 42.5	CL	
IC51-0644-824-5	0.8	64	14.0 x 14.0	16.0 x 16.0	15.2		30.0 x 42.5	CL	
IC218-0724-001 *-*	0.8	72	13.2 x 18.0	18.8 x 23.6		0.90	31.8 x 36.6	OT	
IC51-0724-698	0.8	72	16.0 x 20.0	18.2 x 23.1	16.6 x 21.5		36.0 x 44.5	CL	
IC201-0804-032 *	0.8	80	14.0 x 20.0	17.2 x 23.0		-	38.2 x 38.2	OT	
IC218-0804-002 *-*	0.8	80	14.0 x 20.0	19.2 x 25.2		0.95	31.0 x 38.2	OT	
IC218-0804-007 *	0.8	80	14.0 x 14.0	16.0 x 16.0		-	32.2 x 29.2	OT	
IC234-0804-001 *	0.8	80	14.0 x 20.0	15.0 x 17.9		1.60	32.2 x 32.2	OT	
IC51-0804-819-1	0.8	80	14.0 x 20.0	17.9 x 23.9	16.9 x 22.9		34.0 x 42.5	CL	
IC51-0804-819-2	0.8	80	14.0 x 20.0	17.6 x 23.6	16.3 x 22.3		34.0 x 42.5	CL	
IC51-0804-819-6	0.8	80	14.0 x 20.0	16.8 x 22.8	15.6 x 21.6		34.0 x 42.5	CL	
IC51-0804-819-8	0.8	80	14.0 x 20.0	17.2 x 23.8	16.9 x 22.9		24.0 x 42.5	CL	
IC51-819.KS-12720	0.8	80	14.0 x 20.0	17.2 x 23.2	16.0 x 22.0		34.0 x 42.5	CL	
IC234-1204-017 *	0.8	120	28.0 x 28.0	31.2 x 31.2		1.70	46.2 x 46.2	OT	
IC234-1204-065 *	0.8	120	28.0 x 28.0	32.8 x 32.8		1.63	48.4 x 48.4	OT	
IC51-1204-1497	0.8	120	28.0 x 28.0	29.7 x 29.7	30.5		60.0 x 58.0	CL	
IC51-1204-1646	0.8	120	28.0 x 28.0	30.0 x 31.4	30.8		57.0 x 30.6	CL	
IC200-1284-001 *-*	0.8	128	28.0 x 28.0	32.0 x 32.0		1.50	52.0 x 52.0	OT	
IC51-1284-844-1	0.8	128	28.0 x 28.0	30.0 x 30.0	30.6		44.0 x 57.0	CL	
IC51-1284-976-1	0.8	128	28.0 x 28.0	30.0 x 30.0	30.6		44.0 x 57.0	CL	
IC51-1284-976-2	0.8	128	28.0 x 28.0	28.2 x 28.2	30.2		44.0 x 57.0	CL	
IC51-1284-976-3	0.8	128	28.0 x 28.0	30.0 x 31.4	30.6		44.0 x 57.0	CL	

1.00mm Pitch

Part Number	Pitch	Pins	A x B	C x D	E	F	G x H	Type	PCB's
IC51-0444-615	1.0	44	14.0 x 14.0	17.2 x 17.2	15.8		34.0 x 42.5	CL	
IC51-621.KS-8966	1.0	44	14.0 x 14.0	17.9 x 17.9	16.5		34.0 x 42.5	CL	
IC51-0544-517-2	1.0	54	14.0 x 20.0	19.6 x 25.6	16.8 x 22.8		34.0 x 42.5	CL	
IC51-0564-790	1.0	56	16.0 x 20.0	19.2 x 23.2	17.7 x 21.8		36.0 x 46.0	CL	
IC51-0604-497-2	1.0	60	16.0 x 20.0	17.9 x 23.9	17.0 x 23.0		34.0 x 42.5	CL	
IC201-0644-019 *-*	1.0	64	14.0 x 20.0	17.9 x 23.9		1.22	32.9 x 38.9	OT	
IC51-0644-472	1.0	64	14.0 x 20.0	19.6 x 23.6	16.2 x 22.2		34.0 x 42.5	CL	
IC51-0644-820-1	1.0	64	14.0 x 20.0	18.7 x 24.7	17.0 x 23.0		34.0 x 42.5	CL	
IC51-0644-820-2	1.0	64	14.0 x 20.0	17.6 x 23.6	16.3 x 22.3		34.0 x 42.5	CL	
IC51-0644-820-3	1.0	64	14.0 x 20.0	18.0 x 24.0	16.9 x 22.9		34.0 x 42.5	CL	
IC51-0644-820-4	1.0	64	14.0 x 20.0	17.2 x 23.2	15.8 x 21.8		34.0 x 42.5	CL	
IC51-820-2.KS-9376	1.0	64	14.0 x 20.0	17.9 x 23.9	16.6 x 22.6		34.0 x 42.5	CL	

Click on radio button for PCB dimensions

Click on radio button for PCB dimensions

Click on radio button for PCB dimensions