




# Series SP86

# Dip pushbutton Switches

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)


## SPECIFICATIONS

**RATING:** 50mA 24V DC (Minimum 1  $\mu$ A current is acceptable)  
**INITIAL CONTACT RESISTANCE:** 20m $\Omega$  max. (AC 200  $\mu$ V, 5mA)  
**DIELECTRIC STRENGTH:** 250V AC 1 minute (Except between terminals of LED)  
**INSULATION RESISTANCE:** 100M $\Omega$  min. (250V DC megger)  
**ELECTRICAL LIFE:** 200,000 operations (Rated voltage and current)  
**STATIC CAPACITY:** 1.5pF max. (1MHz)  
**SHOCK RESISTANCE:** 30G (3 directions perpendicular to each other 3 times for each direction)  
**OPERATION TEMPERATURE RANGE:** -25°C to 75°C

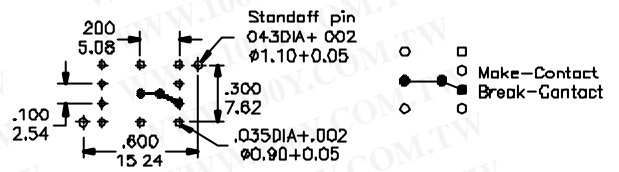


## CAP STYLES

A0




A1




A2




B0



B1



B2



## CAP COLORS

1=RED                      6=ORANGE  
 2=YELLOW                7=BLUE  
 3=GREEN                 8=BROWN  
 4=WHITE                 9=GRAY  
 5=BLACK

## LED COLORS

LEFT: 1=RED 2=YELLOW 3=GREEN  
 RIGHT: 1=RED 2=YELLOW 3=GREEN

## HOW TO ORDER

