


SPECIFICATIONS

(Typical values for batteries stored at 20°C for one year)


Nominal Capacity(At 5mA/20°C/68°F/2.0V Cut-Off)	19 Ah
Open Circuit Voltage(At 20°C/68°F)	3.67 V
Nominal Voltage(At 5mA/20°C/68°F)	3.5 V
Maximum Continuous Current	230 mA
Maximum Pulse Current Capability	500 mA
Rated 1 Sec. Pulse Capability(To 3V)	100 mA
Operating Temperature Range	-55 ~ 85 °C
Weight	97 g(3.26 oz)
Anode Surface Area	40 cm ²
Volume	51 cm ³
Diameter(Max) or L X I	33.6 mm
Height(Max)	60 mm

Dimensions in mm

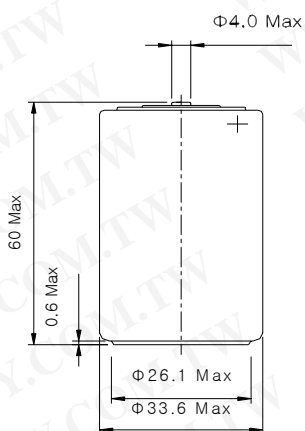


WARNING
 Fire, Explosion And Severe Burn Hazard.
 Do Not Recharge, Crush, Disassemble,
 Heat Above 212°F(100°C), Incinerate
 Or Expose Contents To Water

Voltage(V) DISCHARGE CHARACTERISTICS AT +20°C

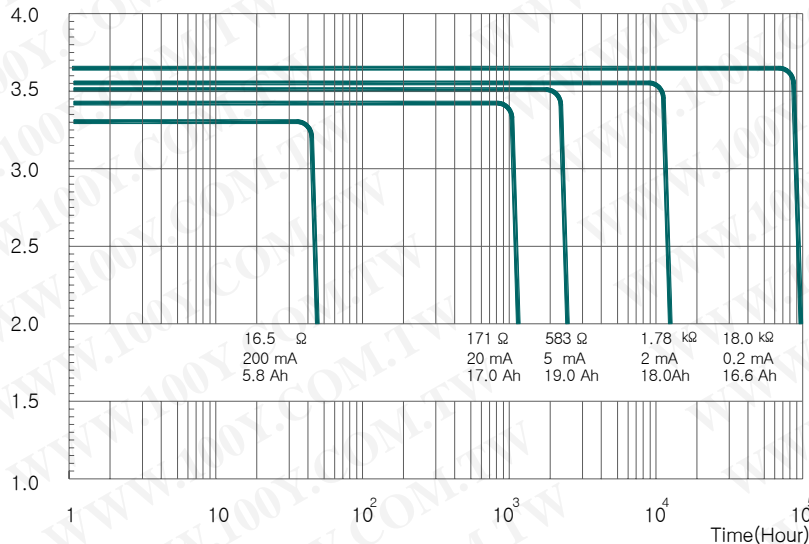

CAPACITY vs. CURRENT

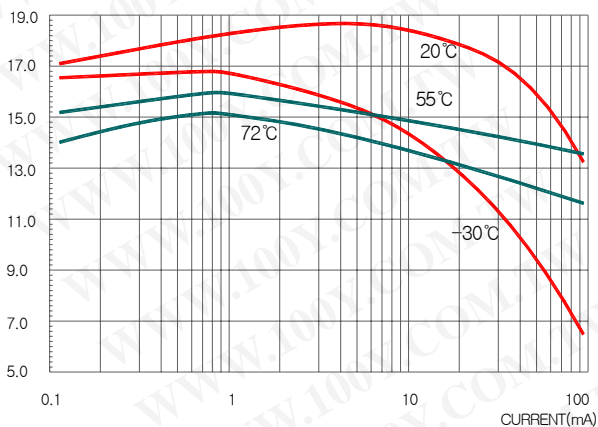

TEMPERATURE vs. OPERATING VOLTAGE

