


CCG81-□U 高频陶瓷电容

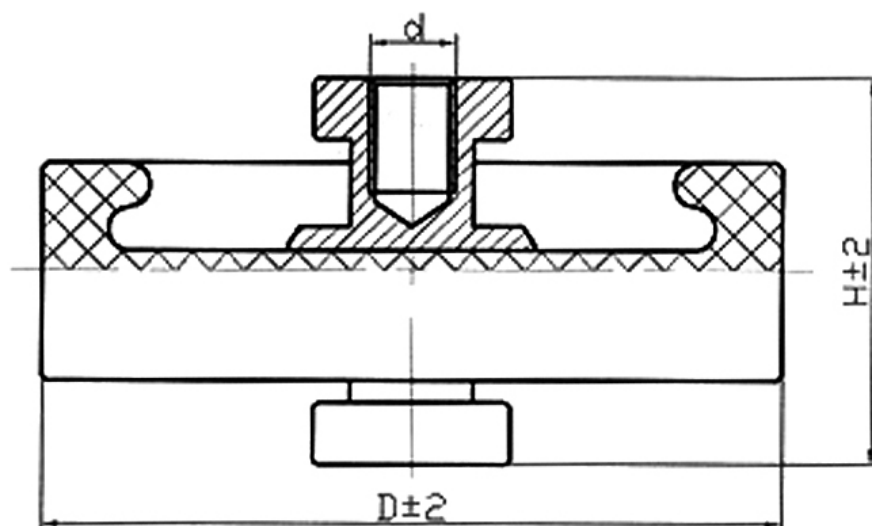

规格型号 Type	电容量 Capacitance (PF)		温度系数 Temperature coefficient (ppm/°C)	直流电压 DC Voltage (KV)	额定无功功率 Rating power (KVA)	介质损耗正切 Dissipation factor	绝缘电阻 Insulation resistance	尺寸 Dimensions (mm)		
	标称值 Value	允许等级偏差 Tolerance						D	H	d
CCG81-1	50	K (±10%)	-750 (U)	15	10	$\text{tg}\delta$ $\leq 6 \times 10^{-4}$	R $\geq 1 \times 10^{10} \Omega$	45	55	M6
	100			15	18			60	39	
	150			15	12			60	38	
	200			8	15			60	34	
	300			12	8			60	33	
	400			7	8			60	32	
	450			7	8			60	31	
	500			10	8			60	31	
	100			13	15			80	39	
CCG81-2	200			15	30			80	37	
	300			15	30			80	35	
	500			15	15			80	34	
	900			7	15			80	33	
	1000			7	15			80	32	
	1500			10	20			90	31	
	300			25	90			110	54	M8
CCG81-3	400			25	90			110	53	
	500			15	90			110	48	
	1000			10	30			110	46	
	1500			7	30			110	44	
	2500			3.3	30			110	43	
	500			25	90			140	50	
CCG81-4	800			25	90			140	49	M8
	1000			20	100			140	50	
	1500			15	90			140	46	
	2000			10	90			140	45	
	500			25	120			150	51	
CCG81-5	1500			21	120			160	48	
	2000			20	120			160	46	
CCG81-6	2500			10	90			160	45	
	3000			10	90			160	44	
	1000			30	300			200	53	M10
CCG81-7	1500			25	250			200	50	
	2500			20	200			200	47	
	3000			20	200			200	47	
	5000			12	150			200	45	
	6000			12	150			200	45	