



| REV | ZONE | REVISION | DATE |
|-----|------|----------|------|
| | | | |
| | | | |

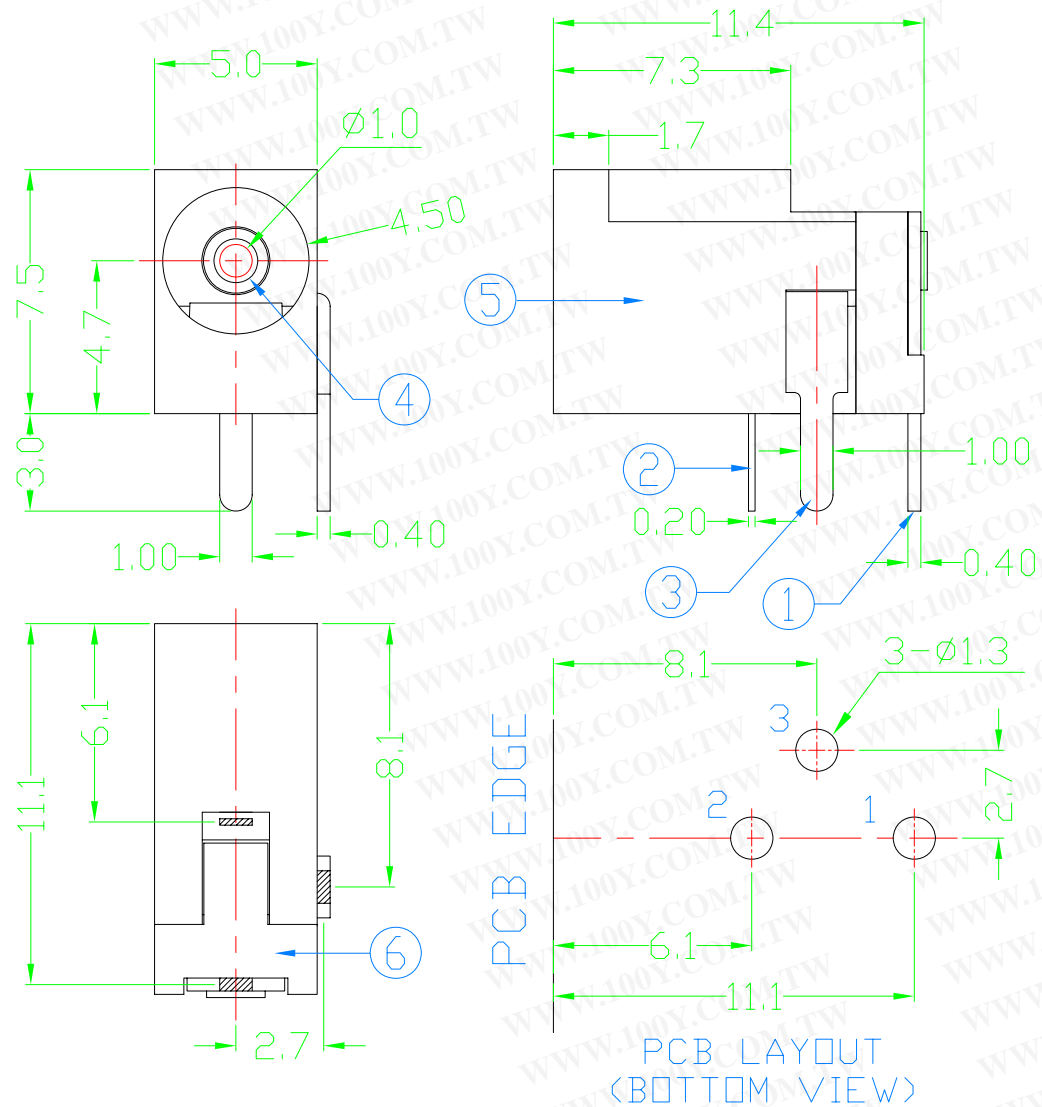

| NO. | NAME | MATERIAL | FINISH | Q'TY |
|-----|--------------|------------------|---------------|------|
| 1 | PIN TERM. | BRASS 0.4 | TIN PLATED | 1 |
| 2 | SLEEVE TREM. | P.B.S 0.2 | TIN PLATED | 1 |
| 3 | BREAK TERM. | BRASS 0.4 | TIN PLATED | 1 |
| 4 | CENTER PIN | BRASS ϕ 1.0 | NICKEL PLATED | 1 |
| 5 | HOUSING | PBT G.F. | BLACK | 1 |
| 6 | BACK COVER | PBT G.F. | BLACK | 1 |

Green Product



Specification:

- Contact Resistance: 30m Ohm Max. At AC 100mA Max 1KHz
- Insulation Resistance: 100M Ohm Min. At 500V DC
- Rated Voltage And Current: DC12V, 2A Max; AC 100V, 1A Max
- Dielectric Withstanding Voltage: 500V AC for 1 Minute
- Insertion Force: 3.0Kg Maximum.
- Extraction Force: 0.3Kg Minimum.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

| COMPUTER NO. | | | UNIT | SCALE | PART NAME | |
|-----------------|------|------|----------|-----------|---------------|------|
| D:\DWG\KD-011-L | | | mm | 1:1 | DC POWER JACK | |
| APPD. | CKD. | DWG. | DATE | TOLERANCE | | REV. |
| TINA | | | 30-12-08 | X. | +0.38 | A0 |
| | | | | .X | +0.25 | |
| | | | | .XX | +0.13 | |
| | | | | .XXX | +0.05 | |

MODEL KD-011-L PAGE 1 OF 1