


2W衰减器BNC-5dB

- 1 接口：BNC-公-母
- 2 频率：DC-3GHz 衰减值：5dB

BNC Male To Female 2W 3G Fixed Attenuator

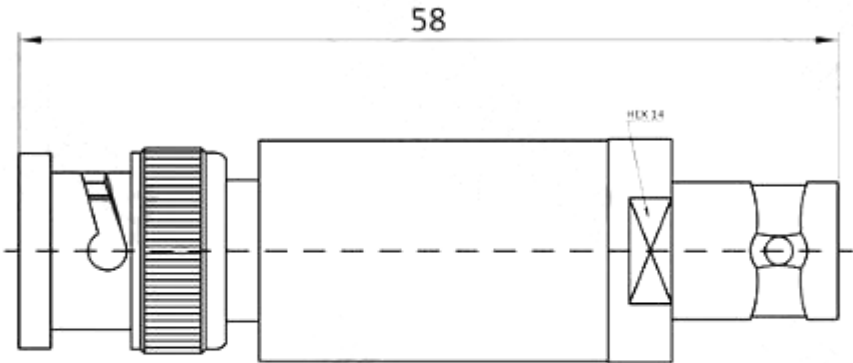

Interface 界面

According to 根据

IEC 60169-8

Electrical 电气

Characteristic Impedance 特性阻抗

50 ohm

Frequency Range 频率范围

DC-3GHz

VSWR 电压驻波比

≤1.2

Transmission power 传输功率

2W (MAX 5W , Short-term)

Attenuation Value 衰减值

3/5/6/10/15/20/30dB

Attenuation Accuracy 衰减精度

3/5/6dB±0.4dB , 10/15/20±0.5dB , 30dB±0.6dB

Dielectric Resistance 介电常数

≥5000MΩ

Environmental 环境 & Mechanical 机械

Temperature Range 温度范围

-55℃ ~ +125℃

Durability 耐久性

≥500 cycles

ROHS compliant 符合 ROHS

Full ROHS compliance

Material and Plating 材料及涂镀

	Material 材料	Plating 电镀
Body 壳体	Brass 黄铜	Ni 镍
Insulator 绝缘体	PTFE 聚四氟乙烯	—
Center conductor 中心导体	Beryllium bronze 铍青铜	Au 金