

射頻轉接器 *SMA-J+RP-TNC/J SMA* 公（內針） 轉 *TNC* 內螺紋內孔

100Y 編號	157721
廠商編號	SMA-J+RP-TNC-J-6G-轉接頭
品名規格	射頻轉接器 SMA 公內針 轉 TNC 內螺紋內孔



产品规格书

This document contains proprietary information and such information may not be disclosed to others for any purposes,
本文件包含专有信息，不得出于任何目的向他人披露此类信息。
not used for sales/marketing/procurement purposes without written permission.
未经书面许可，不得用于销售/营销/采购目的。

1. Electrical/电气

1.1 Impedance /阻抗

50Ω

1.2 Frequency /频率

DC-6GHz

1.3 VSWR/驻波

≤1.25

1.4 Dielectric withstanding voltage /介质耐压

1000V(rms)

1.5 Center contact resistance /TNC中心接触电阻

≤1.5MΩ

1.6 Outer contact resistance /TNC外部接触电阻

≤0.2MΩ

1.7 Center contact resistance /SMA中心接触电阻

≤3MΩ

1.8 Outer contact resistance /SMA外部接触电阻

≤2MΩ

1.9 Insulation resistance /绝缘电阻

≥5000MΩ

2 Environmental & Mechanical /环境与机械

2.1 Temperature range /温度范围

-45°~+125°

2.2 RoHS Compliant /符合RoHS

2.3 Durability /耐久性

500cycles


3 Material and Plating /材料和电镀

3.1 Inner Contact /内导体: Phosphorus-Copper Gold Plating /磷铜镀金

3.2 Outer Contact /外导体: Brass, nickel plated /黄铜镀镍

3.3 Outer Contact /外导体: Brass, Gold plated /SMA黄铜镀金

3.4 Insulators /绝缘体: PTFE /聚四氟乙烯

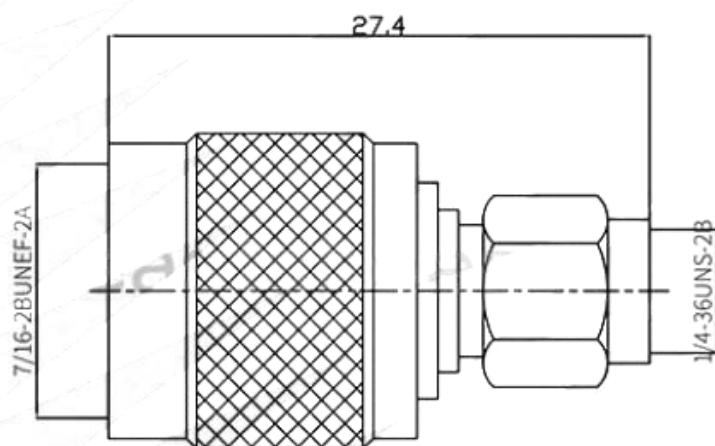

产品型号P/N: RPTNC/SMA-JJ

www.eastsheep.com