

SMA-JJ

- 1 SMA公-SMA公
- 2 DC-6G.SWR≤1.2



SMA-KK

- 1 SMA母头
- 2 SMA母头



SMA-JK

- 1 SMA公头
- 2 SMA母头



SMA/RPSMA-JJ

- 1 SMA公头
- 2 RPSMA内螺纹内孔



产品规格书

This document contains proprietary information and such information may not be disclosed to others for any purposes,
本文件包含专有信息，不得出于任何目的向他人披露此类信息。
not used for sales/marketing/procurement purposes without written permission.
未经书面许可，不得用于销售/营销/采购目的。

1. Electrical/电气


- | | |
|---|------------|
| 1.1 Impedance /阻抗 | 50Ω |
| 1.2 Frequency /频率 | DC-6GHz |
| 1.3 VSWR/驻波 | ≤1.2 |
| 1.4 Dielectric withstanding voltage /介质耐压 | 1000V(rms) |
| 1.5 Center contact resistance /中心接触电阻 | ≤3MΩ |
| 1.6 Outer contact resistance /外部接触电阻 | ≤2MΩ |
| 1.7 Insulation resistance/绝缘电阻 | ≥5000MΩ |

2 Environmenta & Mechanical/环境与机械

- | | |
|---------------------------|------------|
| 2.1 Temperture range/温度范围 | -45°~+125° |
| 2.2 Rohs Compliant/符合RoHS | |
| 2.3 Durability/耐久性 | 500cycles |

3 Material and Plating/材料和电镀

- | | |
|--|--|
| 3.1 Inner Contact/内导体: Phosphorus-Copper Gold Plating/磷铜镀金 | |
| 3.2 Outer Contact/外导体: Brass, Gold plated/黄铜镀金 | |
| 3.3 Insulators/绝缘体: PTFE/聚四氟乙烯 | |

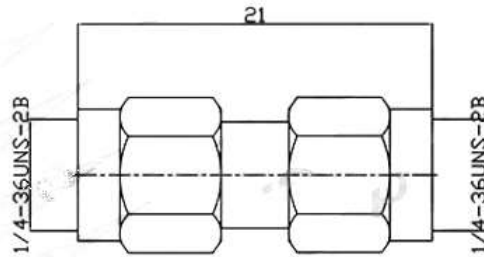

产品型号P/N: SMA-JJ

产品规格书

This document contains proprietary information and such information may not be disclosed to others for any purposes,
本文件包含专有信息，不得出于任何目的向他人披露此类信息。
not used for sales/marketing/procurement purposes without written permission.
未经书面许可，不得用于销售/营销/采购目的。

1. Electrical/电气


- | | |
|---|------------|
| 1.1 Impedance /阻抗 | 50Ω |
| 1.2 Frequency /频率 | DC-6GHz |
| 1.3 VSWR/驻波 | ≤1.2 |
| 1.4 Dielectric withstanding voltage /介质耐压 | 1000V(rms) |
| 1.5 Center contact resistance /中心接触电阻 | ≤3MΩ |
| 1.6 Outer contact resistance /外部接触电阻 | ≤2MΩ |
| 1.7 Insulation resistance/绝缘电阻 | ≥5000MΩ |

2 Environmenta & Mechanical/环境与机械

- | | |
|---------------------------|------------|
| 2.1 Temperture range/温度范围 | -45°~+125° |
| 2.2 Rohs Compliant/符合RoHS | |
| 2.3 Durability/耐久性 | 500cycles |

3 Material and Plating/材料和电镀

- | | |
|--|--|
| 3.1 Inner Contact/内导体: Phosphorus-Copper Gold Plating/磷铜镀金 | |
| 3.2 Outer Contact/外导体: Brass, Gold plated/黄铜镀金 | |
| 3.3 Insulators/绝缘体: PTFE/聚四氟乙烯 | |

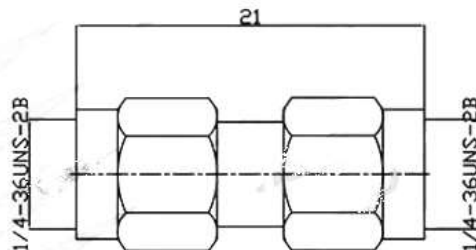

产品型号P/N: SMA/RPSMA-JJ


产品规格书

PRODUCT SPECIFICATION

This document contains proprietary information and such information may not be disclosed to others for any purposes,
本文件包含专有信息，不得出于任何目的向他人披露此类信息。
not used for sales/marketing/procurement purposes without written permission.
未经书面许可，不得用于销售/营销/采购目的。

- 1. Electrical/电气
 - 1.1 Impedance /阻抗 50Ω
 - 1.2 Frequency /频率 DC-6GHz
 - 1.3 VSWR/驻波 ≤ 1.2
 - 1.4 Dielectric withstanding voltage /介质耐压 1000V(rms)
 - 1.5 Center contact resistance /中心接触电阻 $\leq 3m\Omega$
 - 1.6 Outer contact resistance /外部接触电阻 $\leq 2m\Omega$
 - 1.7 Insulation resistance /绝缘电阻 $\geq 5000M\Omega$
- 2. Environmental & Mechanical /环境与机械
 - 2.1 Temperature range /温度范围 $-45^{\circ}\sim+125^{\circ}$
 - 2.2 RoHS Compliant /符合RoHS
 - 2.3 Durability /耐久性 500cycles

- 3. Material and Plating /材料和电镀
 - 3.1 Inner Contact /内导体: Phosphorus-Copper Gold Plating /磷铜镀金
 - 3.2 Outer Contact /外导体: Brass, Gold plated /黄铜镀金
 - 3.3 Insulators /绝缘体: PTFE /聚四氟乙烯

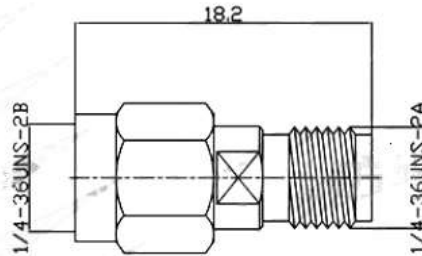


产品型号P/N: SMA-JK

产品规格书

This document contains proprietary information and such information may not be disclosed to others for any purposes,
本文件包含专有信息，不得出于任何目的向他人披露此类信息。
not used for sales/marketing/procurement purposes without written permission.
未经书面许可，不得用于销售/营销/采购目的。

- 1. Electrical/电气
 - 1.1 Impedance /阻抗 50Ω
 - 1.2 Frequency /频率 DC-8GHz
 - 1.3 VSWR/驻波 ≤ 1.2
 - 1.4 Dielectric withstanding voltage /介质耐压 1000V(rms)
 - 1.5 Center contact resistance /中心接触电阻 $\leq 3m\Omega$
 - 1.6 Outer contact resistance /外部接触电阻 $\leq 2m\Omega$
 - 1.7 Insulation resistance /绝缘电阻 $\geq 5000M\Omega$
- 2. Environmental & Mechanical /环境与机械
 - 2.1 Temperature range /温度范围 $-45^{\circ}\sim+125^{\circ}$
 - 2.2 RoHS Compliant /符合RoHS
 - 2.3 Durability /耐久性 500cycles

- 3. Material and Plating /材料和电镀
 - 3.1 Inner Contact /内导体: Phosphorus-Copper Gold Plating /磷铜镀金
 - 3.2 Outer Contact /外导体: Brass, Gold plated /黄铜镀金
 - 3.3 Insulators /绝缘体: PTFE /聚四氟乙烯

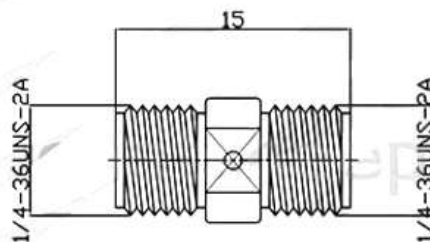

产品型号P/N: SMA-KK-2