


# 2W衰减器SMA-10dB

- ① 接口：SMA-公-母
- ② 频率：DC-6GHz 衰减值：10dB

SMA Male To Female 2W 6G 10dB Fixed Attenuator

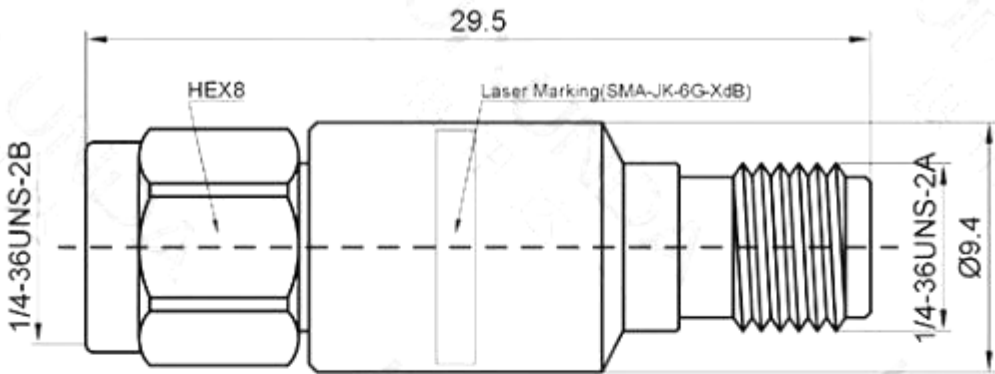

Interface 界面

According to 根据

IEC60169-15

Electrical 电气

Characteristic Impedance 特性阻抗

50 ohm

Frequency Range 频率范围

DC-6GHz

VSWR 电压驻波比

≤1.2

Attenuation Value 衰减值

10dB

Attenuation Accuracy 衰减精度

±0.6

Environmental 环境 & Mechanical 机械

Temperature Range 温度范围

-55°C ~ +125°C

Durability 耐久性

≥500 cycles

ROHS compliant 符合 ROHS

Full ROHS compliance

Material and Plating 材料及涂镀

Material 材料

Plating 电镀

Body 壳体

Stainless steel(SU 303) 不锈钢 SU303

Passivated 钝化

Insulator 绝缘体

PTFE 聚四氟乙烯

—

Center conductor 中心导体

Beryllium bronze 铍青铜

Au 金

Connection sleeve 螺套

Stainless steel 不锈钢

Passivated 钝化