


SMA-JK-6G-20dB 固定衰减器 20dB 不銹鋼 2W 衰减器鐳射打標

2W衰减器SMA-20dB

- ① 接口：SMA-公-母
- ② 频率：DC-6GHz 衰减值：20dB

SMA-JK

SMA Male To Female 2W 6G 20dB Fixed Attenuator

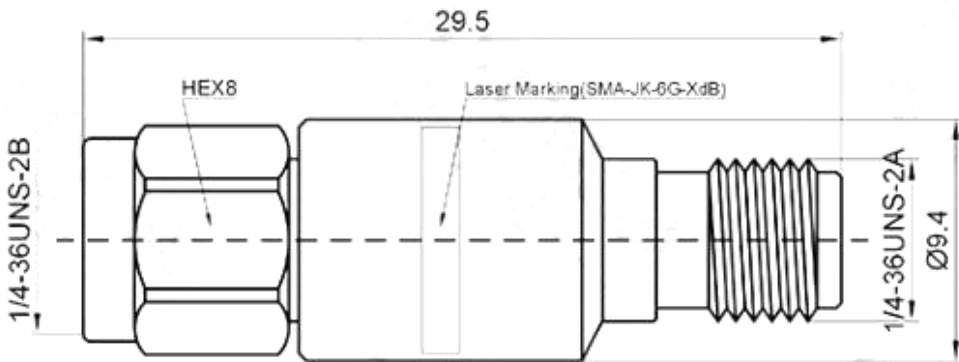

Interface 界面	IEC60169-15	
According to 根据		
Electrical 电气		
Characteristic Impedance 特性阻抗	50 ohm	
Frequency Range 频率范围	DC-6GHz	
VSWR 电压驻波比	≤1.2	
Attenuation Value 衰减值	20dB	
Attenuation Accuracy 衰减精度	±0.6	
Environmental 环境 & Mechanical 机械		
Temperature Range 温度范围	-55℃ ~ +125℃	
Durability 耐久性	≥500 cycles	
ROHS compliant 符合 ROHS	Full ROHS compliance	
Material and Plating 材料及涂镀		
	Material 材料	Plating 电镀
Body 壳体	Stainless steel(SU 303) 不銹鋼 SU303	Passivated 钝化
Insulator 绝缘体	PTFE 聚四氟乙烯	—
Center conductor 中心导体	Beryllium bronze 铍青铜	Au 金
Connection sleeve 螺套	Stainless steel 不銹鋼	Passivated 钝化