


2W衰减器SMA-2dB

- 1接口：SMA-公-母
- 2频率：DC-6GHz 衰减值：2dB

SMA Male To Female 2W 6G 2dB Fixed Attenuator

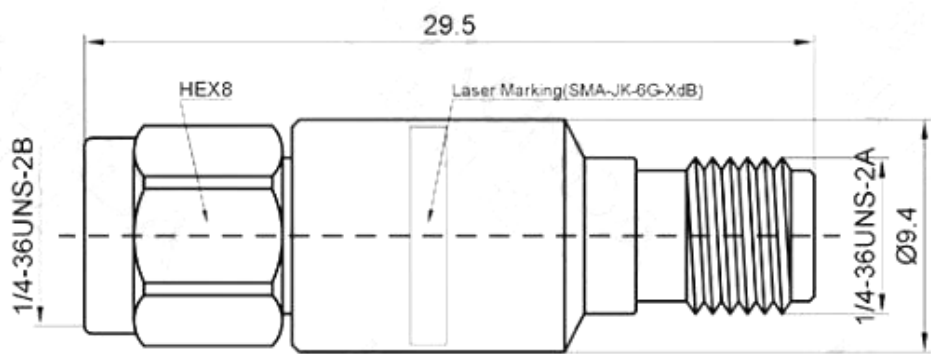

Interface 界面

According to 根据

IEC60169-15

Electrical 电气

Characteristic Impedance 特性阻抗

50 ohm

Frequency Range 频率范围

DC-6GHz

VSWR 电压驻波比

≤1.2

Attenuation Value 衰减值

2dB

Attenuation Accuracy 衰减精度

±0.3

Environmental 环境 & Mechanical 机械

Temperature Range 温度范围

-55℃ ~ +125℃

Durability 耐久性

≥500 cycles

ROHS compliant 符合 ROHS

Full ROHS compliance

Material and Plating 材料及涂镀

	Material 材料	Plating 电镀
Body 壳体	Stainless steel(SU 303) 不锈钢 SU303	Passivated 钝化
Insulator 绝缘体	PTFE 聚四氟乙烯	—
Center conductor 中心导体	Beryllium bronze 铍青铜	Au 金
Connection sleeve 螺套	Stainless steel 不锈钢	Passivated 钝化