

158762

SMA-K+SMA-KY-轉接頭-6G

射頻轉接器 SMA-KYK-4 SMA 母轉母 螺母固定 SMA-KKY DC-6G

SMA-KYK-4

- 1 SMA母头-SMA母头
- 2 DC-6G, SWR≤1.2




产品规格书

PRODUCT SPECIFICATION

产品型号Model: SMA-KYK-4

频率Frequency:DC-6GHz

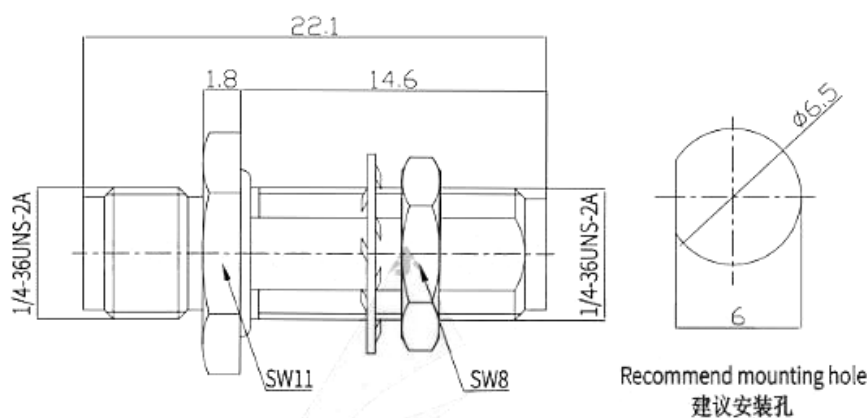

注 Note. 尺寸 Dimensions (mm)

产品参数 Product parameters

1.电气 Electrical

1.1	阻抗 Impedance	50 Ω
1.2	频率范围 Frequency range	DC-6GHz
1.3	驻波 VSWR	≤1.2
1.4	介质耐压 Dielectric withstanding voltage	1000V rms
1.5	内导体接触电阻 Internal conductor contact resistance	≤3m Ω
1.6	外导体接触电阻 External conductor contact resistance	≤2m Ω
1.7	绝缘电阻 Insulation resistance	≥5000M Ω

2.环境与机械 Environment and Machinery

2.1	温度范围 Temperature range	-45°~+125°
2.2	耐久性 Durability	500cycles

3.材料和镀层 Material and Plating

3.1	内导体 Inner conductor	磷铜镀金 Phosphorus copper gold plating
3.2	外导体 Outer conductor	黄铜镀金 Brass gold plated
3.3	绝缘体 Insulator	聚四氟乙烯 PTFE

158764


RP-SMA-K+RP-SMA-K-6G-轉接頭

射頻連接器 RPSMA-KK SMA 外螺紋內針轉外螺紋內針

产品规格书
PRODUCT SPECIFICATION

产品型号Model: RPSMA-KK

频率Frequency:DC-6GHz

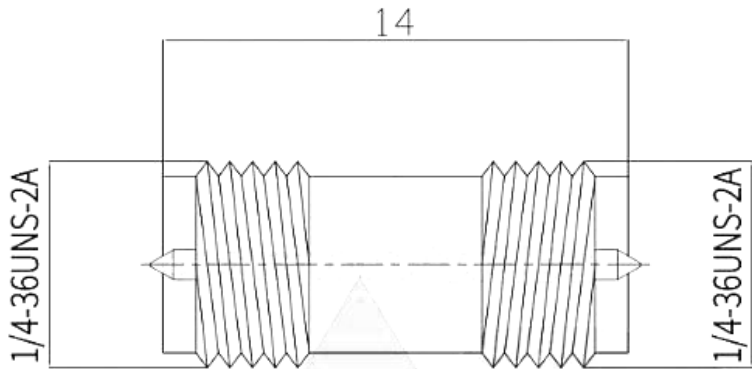

注 Note: 尺寸 Dimensions (mm)

产品参数 Product parameters

1.电气 Electrical		
1.1	阻抗 Impedance	50Ω
1.2	频率范围 Frequency range	DC-6GHz
1.3	驻波 VSWR	≤1.2
1.4	介质耐压 Dielectric withstanding voltage	1000V rms
1.5	内导体接触电阻 Internal conductor contact resistance	≤3mΩ
1.6	外导体接触电阻 External conductor contact resistance	≤2mΩ
1.7	绝缘电阻 Insulation resistance	≥5000MΩ
2.环境与机械 Environment and Machinery		
2.1	温度范围 Temperature range	-45°~+125°
2.2	耐久性 Durability	500cycles
3.材料和镀层 Material and Plating		
3.1	内导体 Inner conductor	黄铜镀金 Brass gold plated
3.2	外导体 Outer conductor	黄铜镀金 Brass gold plated
3.3	绝缘体 Insulator	聚四氟乙烯 PTFE

RPSMA-KK

- 1 SMA外螺紋內針
- 2 SMA外螺紋內針



158765

RP-SMA-J+RP-SMA-J-6G-轉接頭

射頻連接器 RPSMA-JJ SMA 內螺紋孔轉 SMA 內螺紋內孔 雙孔

RPSMA-JJ

- 1 SMA內螺紋內孔
2 SMA內螺紋內孔




产品规格书

PRODUCT SPECIFICATION

产品型号Model: RPSMA-JJ

频率Frequency:DC-6GHz

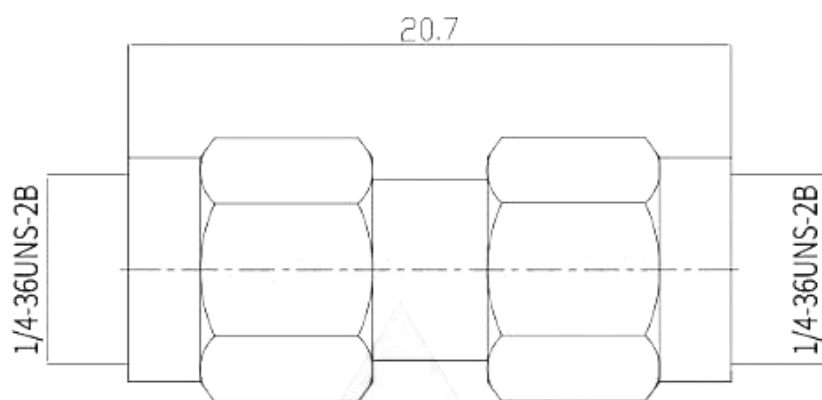

注 Note: 尺寸 Dimensions (mm)

产品参数 Product parameters

1.电气 Electrical

1.1	阻抗 Impedance	50Ω
1.2	频率范围 Frequency range	DC-6GHz
1.3	驻波 VSWR	≤1.2
1.4	介质耐压 Dielectric withstanding voltage	1000V rms
1.5	内导体接触电阻 Internal conductor contact resistance	≤3mΩ
1.6	外导体接触电阻 External conductor contact resistance	≤2mΩ
1.7	绝缘电阻 Insulation resistance	≥5000MΩ

2.环境与机械 Environment and Machinery

2.1	温度范围 Temperature range	-45°~+125°
2.2	耐久性 Durability	500cycles

3.材料和镀层 Material and Plating

3.1	内导体 Inner conductor	磷铜镀金 Phosphorus copper gold plating
3.2	外导体 Outer conductor	黄铜镀金 Brass gold plated
3.3	绝缘体 Insulator	聚四氟乙烯 PTFE

158766

SMA-K+RP-SMA-J-6G-轉接頭

反極性轉接器 SMA/RPSMA-KJ SMA 外螺紋內孔轉內螺內孔

SMA/RPSMA-KJ

- 1 SMA內螺紋內孔
2 SMA外螺紋內孔




产品规格书

PRODUCT SPECIFICATION

产品型号Model: SMA/RPSMA-KJ

频率Frequency:DC-6GHz

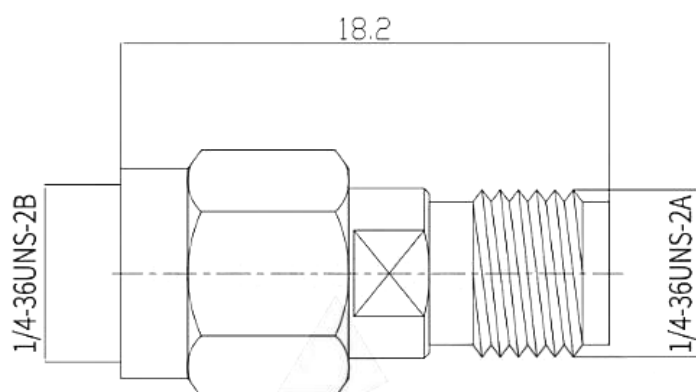

注 Note: 尺寸 Dimensions (mm)

产品参数 Product parameters

1.电气 Electrical

1.1	阻抗 Impedance	50Ω
1.2	频率范围 Frequency range	DC-6GHz
1.3	驻波 VSWR	≤1.2
1.4	介质耐压 Dielectric withstanding voltage	1000V rms
1.5	内导体接触电阻 Internal conductor contact resistance	≤3mΩ
1.6	外导体接触电阻 External conductor contact resistance	≤2mΩ
1.7	绝缘电阻 Insulation resistance	≥5000MΩ

2.环境与机械 Environment and Machinery

2.1	温度范围 Temperature range	-45°~+125°
2.2	耐久性 Durability	500cycles

3.材料和镀层 Material and Plating

3.1	内导体 Inner conductor	磷铜镀金 Phosphorus copper gold plating
3.2	外导体 Outer conductor	黄铜镀金 Brass gold plated
3.3	绝缘体 Insulator	聚四氟乙烯 PTFE

158767

SMA-J+RP-SMA-K-6G-轉接頭

反極性轉接器 SMA/RPSMA-JK SMA 內螺紋針轉外螺紋針

SMA/RPSMA-JK

1 SMA公頭

2 RPSMA外螺紋內針




产品规格书

PRODUCT SPECIFICATION

产品型号Model: SMA/RPSMA-JK

频率Frequency:DC-6GHz

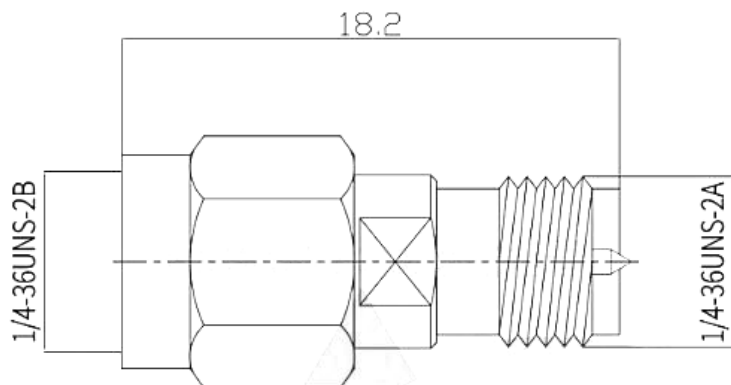

注 Note: 尺寸 Dimensions (mm)

产品参数 Product parameters

1.电气 Electrical

1.1	阻抗 Impedance	50Ω
1.2	频率范围 Frequency range	DC-6GHz
1.3	驻波 VSWR	≤1.2
1.4	介质耐压 Dielectric withstanding voltage	1000V rms
1.5	内导体接触电阻 Internal conductor contact resistance	≤3mΩ
1.6	外导体接触电阻 External conductor contact resistance	≤2mΩ
1.7	绝缘电阻 Insulation resistance	≥5000MΩ

2.环境与机械 Environment and Machinery

2.1	温度范围 Temperature range	-45°~+125°
2.2	耐久性 Durability	500cycles

3.材料和镀层 Material and Plating

3.1	内导体 Inner conductor	黄铜镀金 Brass gold plated
3.2	外导体 Outer conductor	黄铜镀金 Brass gold plated
3.3	绝缘体 Insulator	聚四氟乙烯 PTFE