


- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: -25°C ~ +85°C

PART NO:
B02-050611EC-1X

BRACKET FINISHES: —

L:LATCH BRACKET

S:SCREW BRACKET

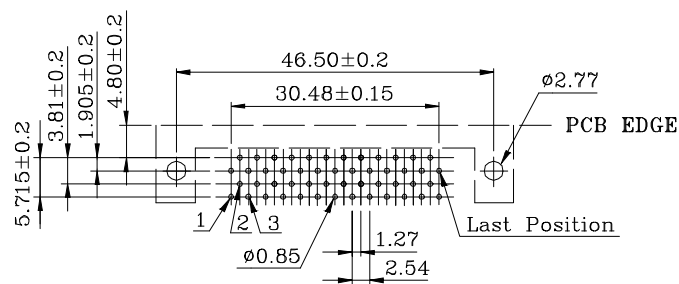

PCB Layout (A)

6	BOARDLOCK	COPPER ALLOY	PLATING: Tin	
5	BRACKET	SPCC	PLATING: Ni	
4	COVER	PBT+30%GF	COLOR: BLACK	
3	HOUSING	PBT+30%GF	COLOR: BLACK	
2	SHELL	SPCC	PLATING: Ni	
1	TERMINAL	PHOSPHOR BRONZE	CONTACT AREA: Au 5u" SOLDER AREA: Sn UNDER-PLATING: Ni	
ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS

			QUALITY SYMBOLS	Tolerance	NAME:	SCSI PIN TYPE 50P F 90° DIP (客户用图)				PART NO.	B02-050611EC-1X	
			□: ☒:	x. ±0.50	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
△	2008/07/11	NEW ISSUE	JINGLI	.x ±0.30 .xx ±0.25	SCALE:	N:1	DATE:	2008/07/11	JINGLI	KING ZHOU		B02-016
SIDE	DATE	DESCRIPTION	APPROVER	▽: ▽:								
			ZERO DEFECT S.P.C	 								