

HD74LS174 / HD74LS175

Hex / Quadruple D-type Flip-Flops (with clear)

REJ03D0451-0300

Rev.3.00

Jul.15.2005

These positive-edge-triggered flip-flops utilize TTL circuitry to implement D-type flip-flop logic. All have a direct clear input, and the HD74LS175 features complementary outputs from each flip-flops. Information at the D inputs meeting the setup time requirements is transferred to the Q outputs on the positive-going edge of the clock pulse. Clock triggering occurs at a particular voltage level and is not directly related to the transition time of the positive-going pulse. When the clock input is at either the high or low level, the D input signal has no effect at the outputs.

Features

- Ordering Information

• HD74LS174

Part Name	Package Type	Package Code (Previous Code)	Package Abbreviation	Taping Abbreviation (Quantity)
HD74LS174P	DILP-16 pin	PRDP0016AE-B (DP-16FV)	P	—
HD74LS174FPEL	SOP-16 pin (JEITA)	PRSP0016DH-B (FP-16DAV)	FP	EL (2,000 pcs/reel)
HD74LS174RPEL	SOP-16 pin (JEDEC)	PRSP0016DG-A (FP-16DNV)	RP	EL (2,500 pcs/reel)


• HD74LS175

Part Name	Package Type	Package Code (Previous Code)	Package Abbreviation	Taping Abbreviation (Quantity)
HD74LS175P	DILP-16 pin	PRDP0016AE-B (DP-16FV)	P	—
HD74LS175FPEL	SOP-16 pin (JEITA)	PRSP0016DH-B (FP-16DAV)	FP	EL (2,000 pcs/reel)
HD74LS175RPEL	SOP-16 pin (JEDEC)	PRSP0016DG-A (FP-16DNV)	RP	EL (2,500 pcs/reel)

Note: Please consult the sales office for the above package availability.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Pin Arrangement

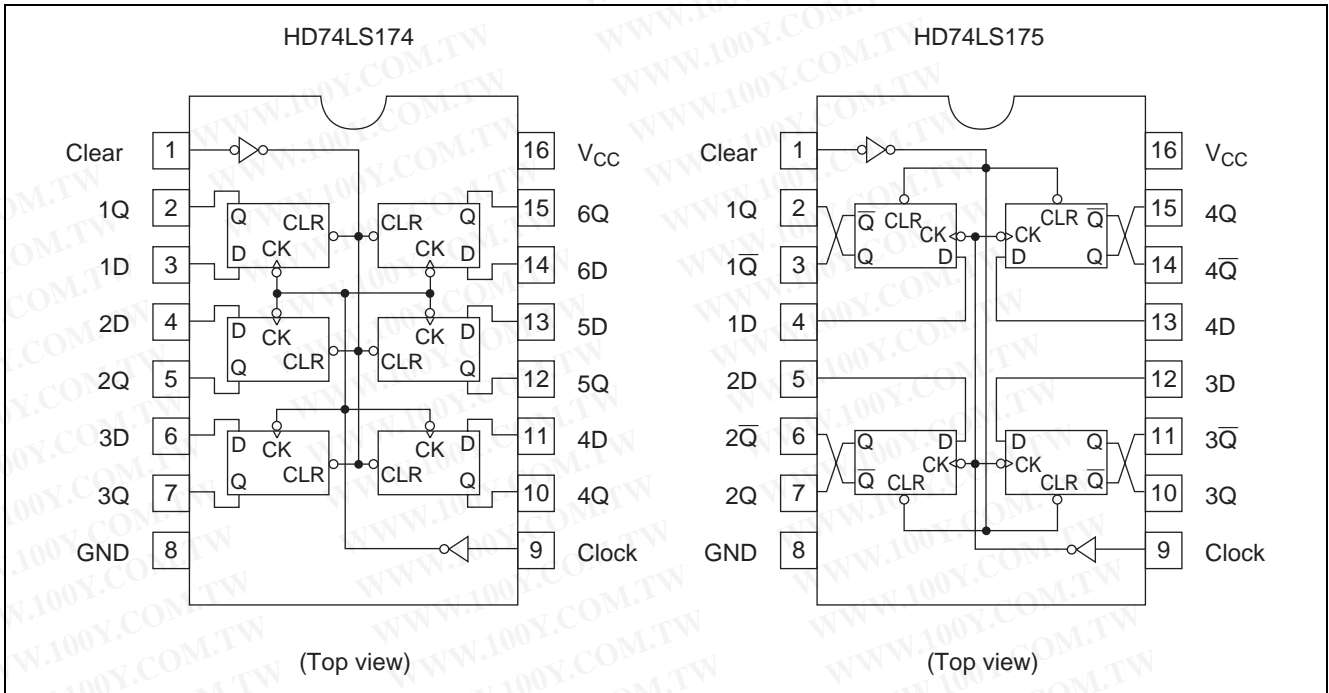


Function Table

Inputs			Outputs	
Clear	Clock	D	Q	\bar{Q}
L	X	X	L	H
H	\uparrow	H	H	L
H	\uparrow	L	L	H
H	L	X	Q_0	\bar{Q}_0

- Notes:
1. H; high level, L; low level, X; irrelevant
 2. \uparrow ; transition from low to high level
 3. Q_0 ; the level of Q before the indicated steady-state input conditions were established.
 4. \bar{Q} is applied to HD74LS175 only.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Block Diagram

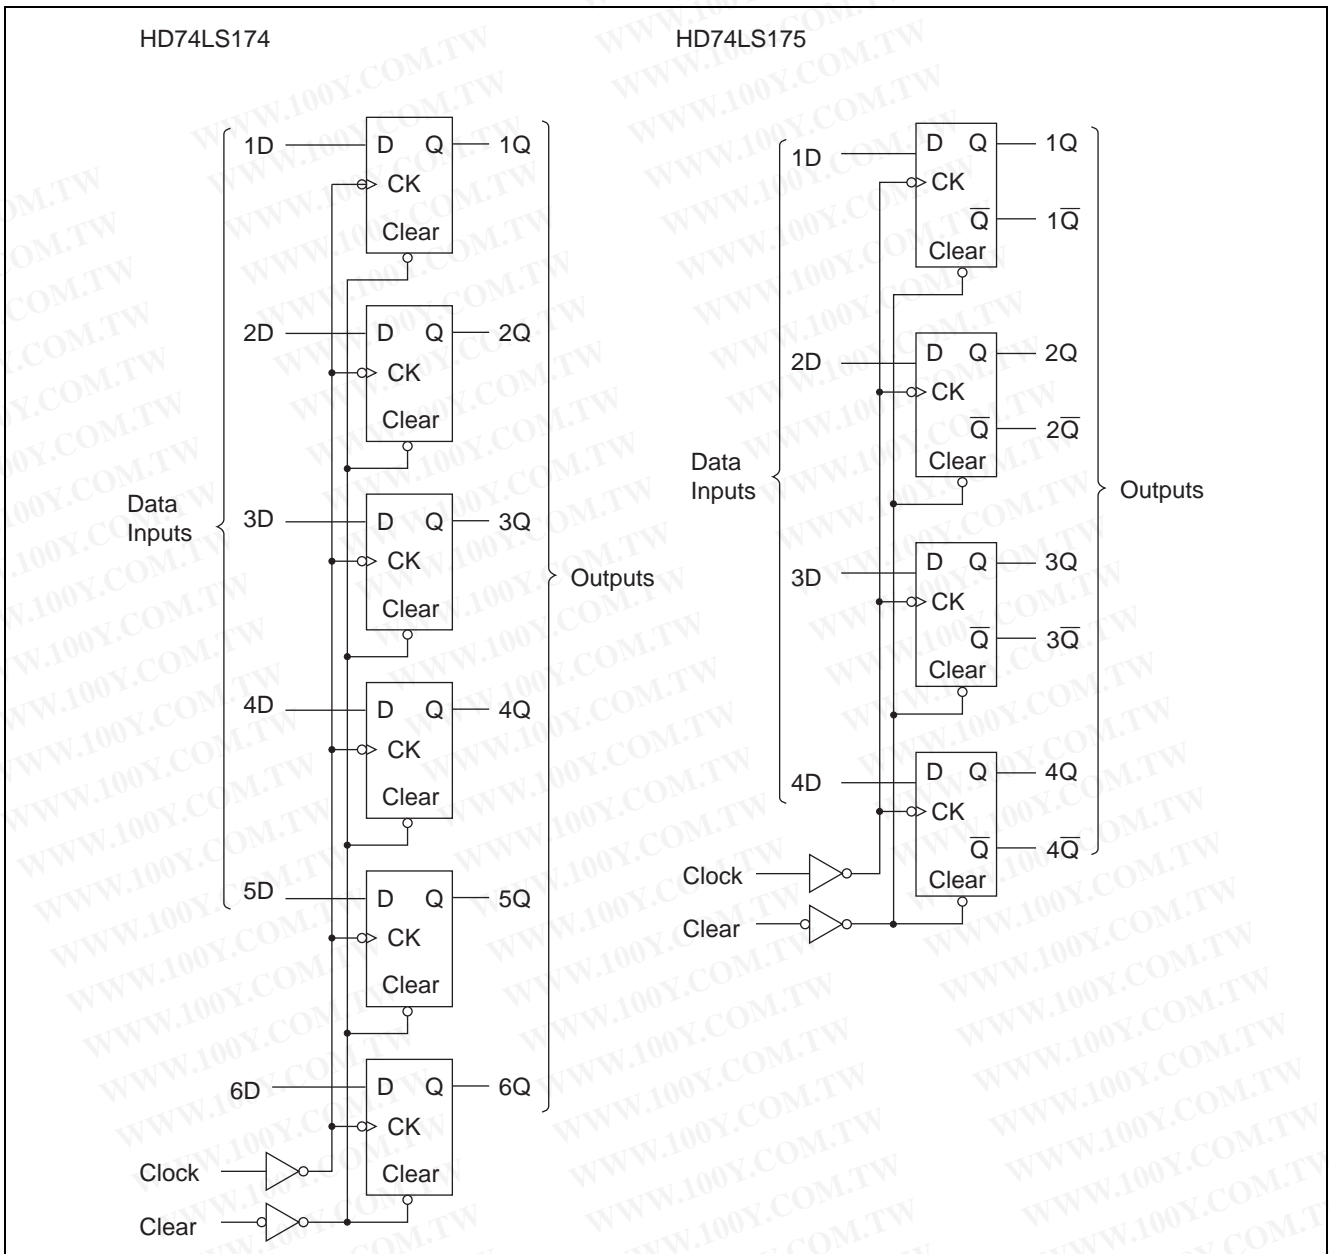

Absolute Maximum Ratings

Item	Symbol	Ratings	Unit
Supply voltage	V_{CC}	7	V
Input voltage	V_{IN}	7	V
Power dissipation	P_T	400	mW
Storage temperature	T_{stg}	-65 to +150	°C

Note: Voltage value, unless otherwise noted, are with respect to network ground terminal.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Recommended Operating Conditions

• HD74LS174

Item	Symbol	Min	Typ	Max	Unit
Supply voltage	V_{CC}	4.75	5.00	5.25	V
Output current	I_{OH}	—	—	-400	μA
	I_{OL}	—	—	8	mA
Operating temperature	T_{opr}	-20	25	75	$^{\circ}C$
Clock frequency	f_{clock}	0	—	30	MHz
Clock pulse width	$t_w(CK)$	20	—	—	ns
Clear pulse width	$t_w(CLR)$	20	—	—	ns
Setup time	Data input	$t_{su}(data)$	20	—	ns
	Clear inactive-state	$t_{su}(CLR)$	25	—	ns
Data hold time	$t_h(data)$	5	—	—	ns

• HD74LS175

Item	Symbol	Min	Typ	Max	Unit
Supply voltage	V_{CC}	4.75	5.00	5.25	V
Output current	I_{OH}	—	—	-400	μA
	I_{OL}	—	—	8	mA
Operating temperature	T_{opr}	-20	25	75	$^{\circ}C$
Clock frequency	f_{clock}	0	—	30	MHz
Clock pulse width	$t_w(CK)$	20	—	—	ns
Clear pulse width	$t_w(CLR)$	20	—	—	ns
Setup time	Data input	$t_{su}(data)$	20	—	ns
	Clear inactive-state	$t_{su}(CLR)$	25	—	ns
Data hold time	$t_h(data)$	5	—	—	ns

Electrical Characteristics

($T_a = -20$ to $+75^{\circ}C$)

Item	Symbol	min.	typ.*	max.	Unit	Condition	
Input voltage	V_{IH}	2.0	—	—	V		
	V_{IL}	—	—	0.8	V		
Output voltage	V_{OH}	2.7	—	—	V	$V_{CC} = 4.75 V, V_{IH} = 2 V, V_{IL} = 0.8 V, I_{OH} = -400 \mu A$	
	V_{OL}	—	—	0.5	V		
Input current	I_{IH}	—	—	20	μA	$V_{CC} = 5.25 V, V_I = 2.7 V$	
	I_{IL}	—	—	-0.4	mA		$V_{CC} = 5.25 V, V_I = 0.4 V$
	I_I	—	—	0.1	mA		
Short-circuit output current	I_{OS}	-20	—	-100	mA	$V_{CC} = 5.25 V$	
Supply current**	I_{CC}	—	16	26	mA	HD74LS174	
		—	11	18	mA	HD74LS175	
Input clamp voltage	V_{IK}	—	—	-1.5	V	$V_{CC} = 4.75 V, I_{IN} = -18 mA$	

Notes: * $V_{CC} = 5 V, T_a = 25^{\circ}C$

** With all outputs open and 4.5 V applied to all data and clear inputs, I_{CC} is measured after a momentary grounded, then 4.5 V, is applied to clock.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Switching Characteristics

• HD74LS174

(V_{CC} = 5 V, Ta = 25°C)

Item	Symbol	Inputs	Outputs	min.	typ.	max.	Unit	Condition
Maximum clock frequency	f_{max}	Clock	Q	30	40	—	MHz	C _L = 15 pF, R _L = 2 kΩ
Propagation delay time	t _{PHL}	Clear	Q	—	23	35	ns	
	t _{PLH}	Clock	Q	—	20	30		
	t _{PHL}	Clock	Q	—	21	30		


• HD74LS175

(V_{CC} = 5 V, Ta = 25°C)

Item	Symbol	Inputs	Outputs	min.	typ.	max.	Unit	Condition
Maximum clock frequency	f_{max}	Clock	Q, \bar{Q}	30	40	—	MHz	C _L = 15 pF, R _L = 2 kΩ
Propagation delay time	t _{PLH}	Clear	\bar{Q}	—	16	25	ns	
	t _{PHL}		Q	—	20	30		
	t _{PLH}	Clock	Q, \bar{Q}	—	13	25		
	t _{PHL}	Clock	Q, \bar{Q}	—	16	25		

Testing Method

Test Circuit

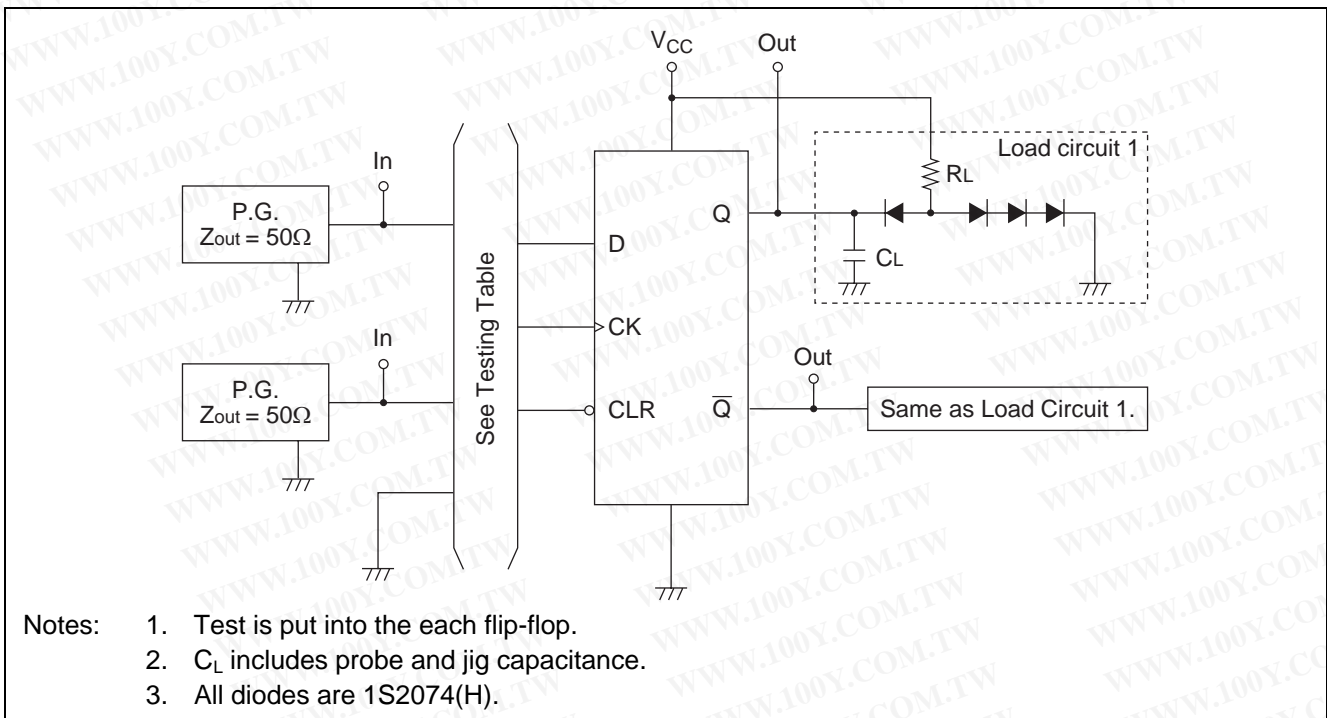


Testing Table

Item	From input to output	Inputs			Outputs	
		CLR	CK	D	Q	\bar{Q}
f_{max}	CK→Q, \bar{Q} *	4.5 V	IN	IN	OUT	OUT
t _{PLH}	CK→Q, \bar{Q} *	4.5 V	IN	IN		
t _{PHL}	CLR→Q, \bar{Q} *	IN	IN	4.5 V		

Note: *. HD74LS175 only



勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Waveform

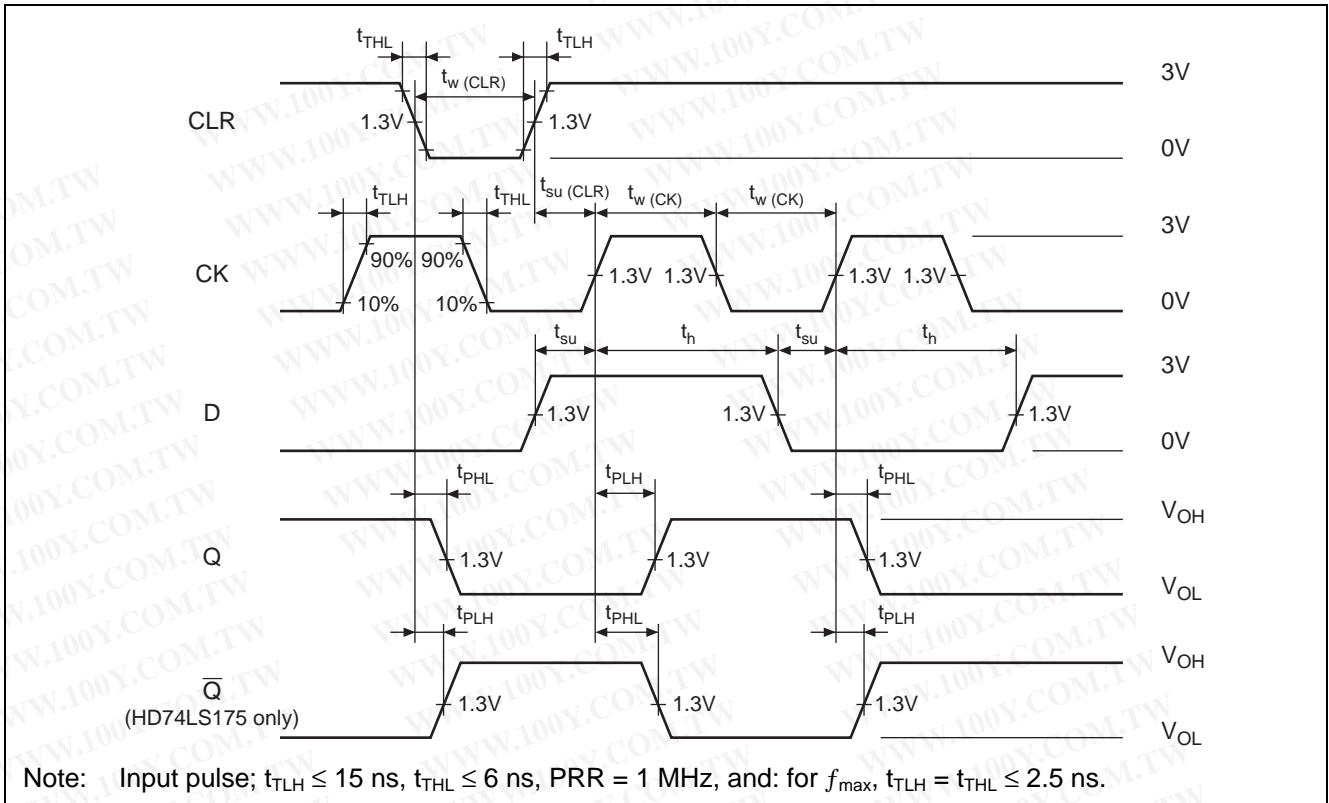



勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Package Dimensions

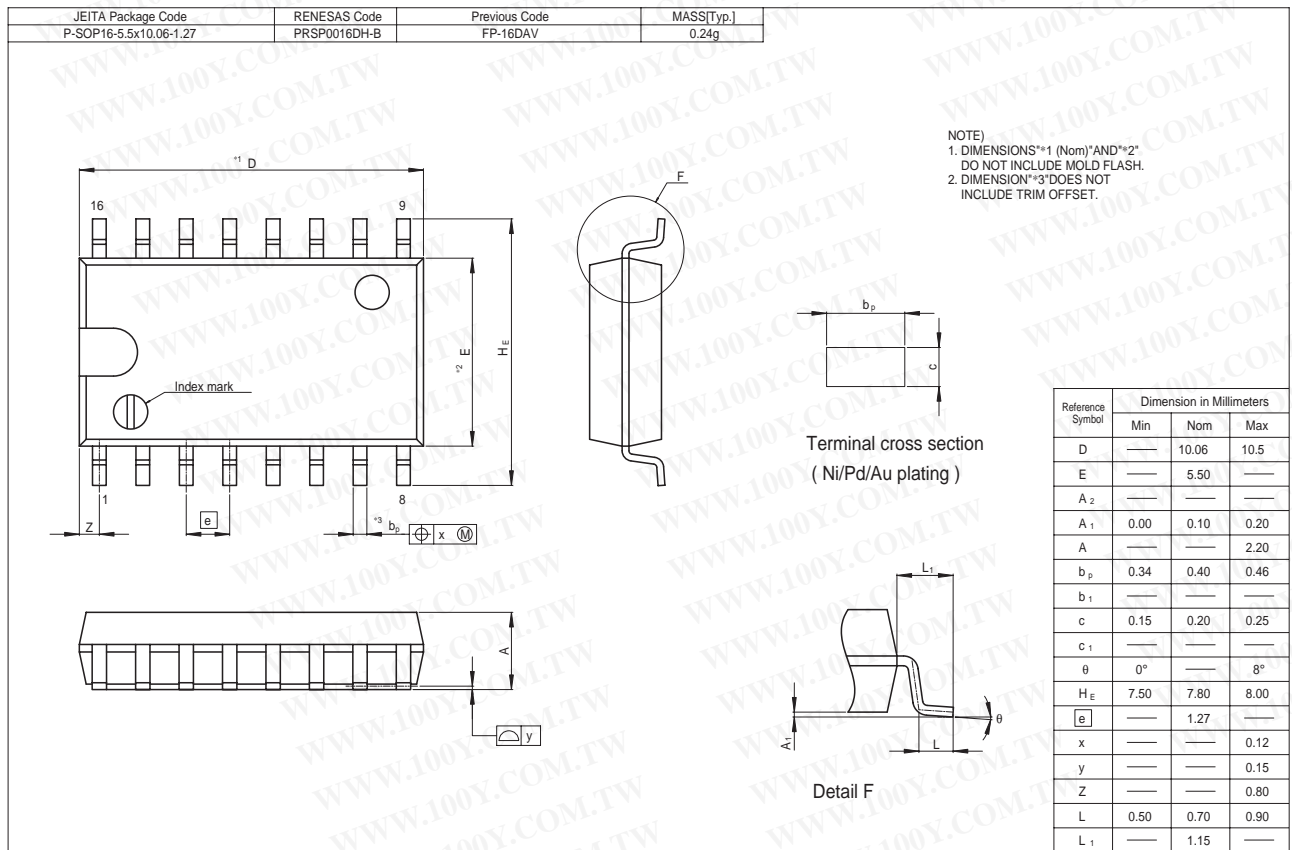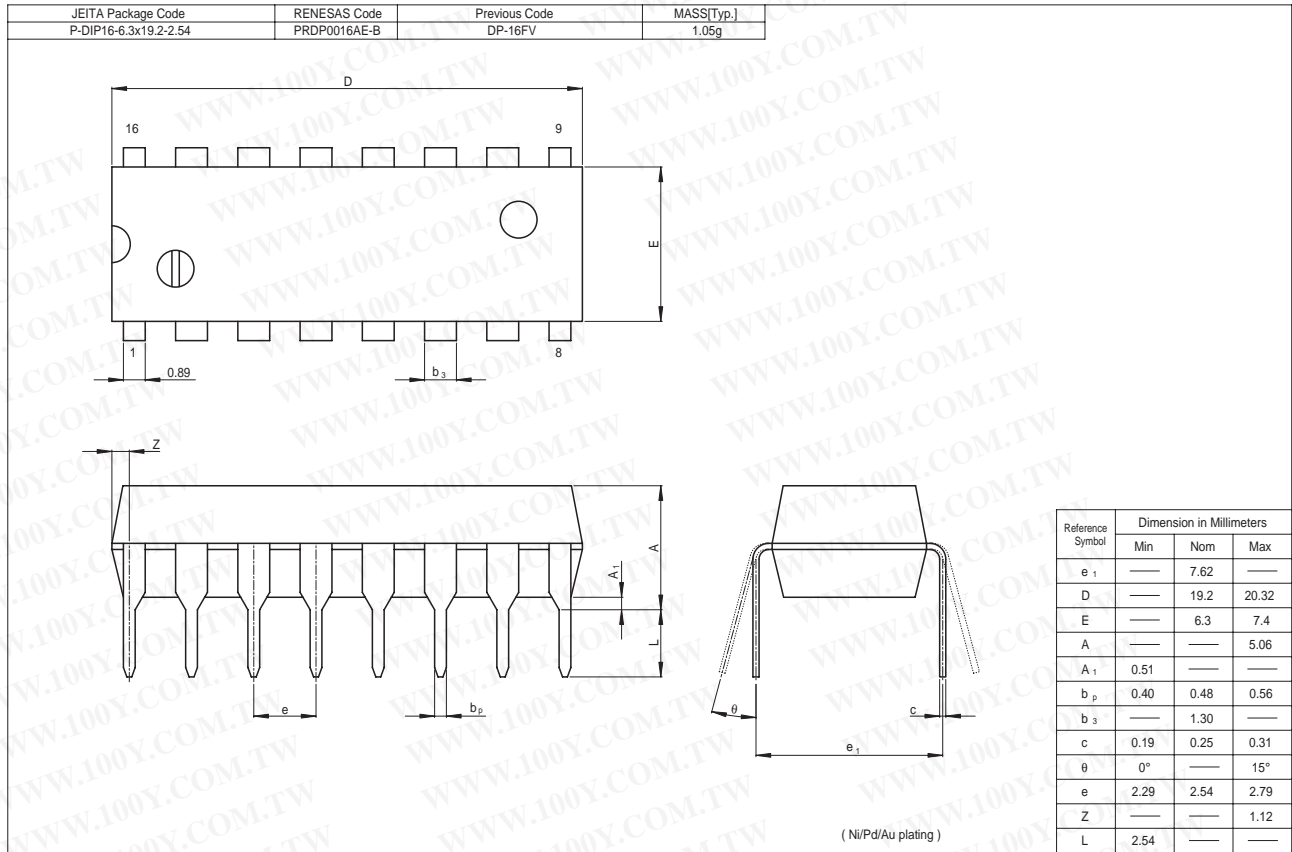


HD74LS174 / HD74LS175


JEITA Package Code P-SOP16-3.95x9.9-1.27	RENESAS Code PRSP0016DG-A	Previous Code FP-16DNV	MASS[Typ.] 0.15g
---------------------------------------------	------------------------------	---------------------------	---------------------

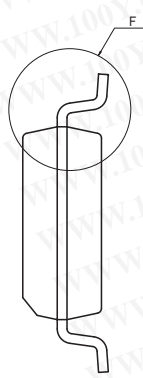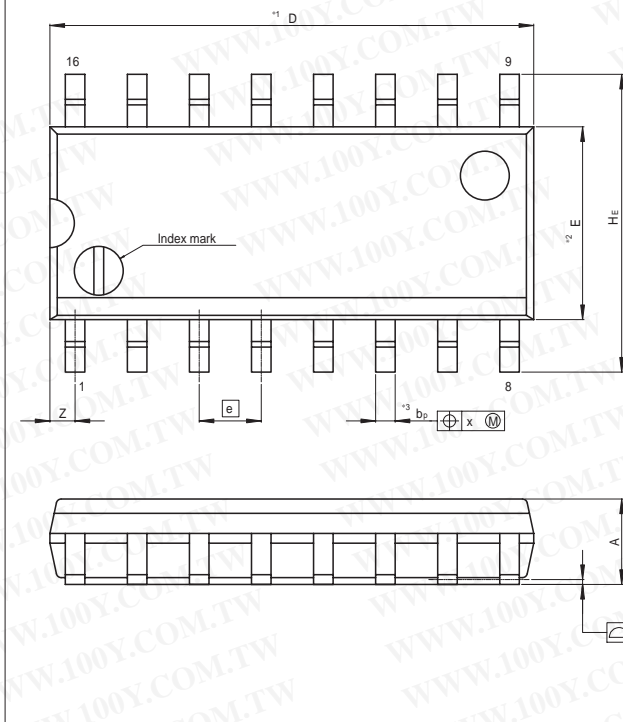

NOTE
1. DIMENSIONS *1 (Nom) AND *2
DO NOT INCLUDE MOLD FLASH.
2. DIMENSION *3 DOES NOT
INCLUDE TRIM OFFSET.



Terminal cross section
(Ni/Pd/Au plating)



Reference Symbol	Dimension in Millimeters		
	Min	Nom	Max
D	—	9.90	10.30
E	—	3.95	—
A ₂	—	—	—
A ₁	0.10	0.14	0.25
A	—	—	1.75
b _p	0.34	0.40	0.46
b ₁	—	—	—
c	0.15	0.20	0.25
c ₁	—	—	—
θ	0°	—	8°
H _E	5.80	6.10	6.20
e	—	1.27	—
x	—	—	0.25
y	—	—	0.15
Z	—	—	0.635
L	0.40	0.60	1.27
L ₁	—	1.08	—

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)