




ZE-800

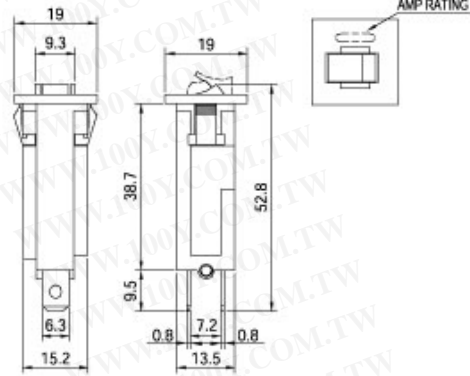


Specifications:

- *Standard Rating: 1.5-20 AMPERE.
- *Input Power: 125 VAC / 250 VAC / 32 VDC.
- *Dielectric Strength: 1500 VAC / 1 Minute.
- *Interrupt Capacity: 125 VAC x 1000 A, 250 VAC x 200 A.
- *Insulation Resistance: >100 MΩ
- *Calibration: 25 C-105 C of Rated Current-Continuously Carried.
25 C-Between 101% to 134%-May Trip or Not.
25 C-135% of Rated Current-Trip Within 1 Hour.
25 C-200% of Rated Current-Trip Within 1 Minute.
- *Contact Endurance:
125 VAC x 150% of Rated Current-500 Cycles.
- *Reset: Manual Push Reset/Auto Reset.


Approvals:

- * Approval: 2-18 A 125/250 VAC
- * Approval: 3-15 A 125 VAC

Recommended Panel Cutouts

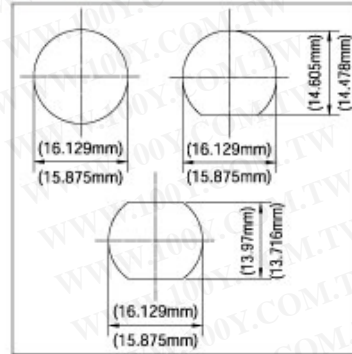


Panel Thickness

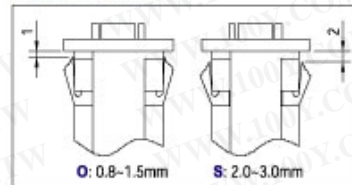

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

How to Order

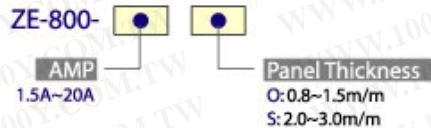

MAX. Internal Resistance		DERATING FACTOR	
AMP	RESISTANCE	TEMP	2A~20A
1.5A-2A	0.150	60°C	x 0.52
2.5A-3A	0.120	55°C	x 0.58
3A-4A	0.080	50°C	x 0.64
4A-5A	0.040	45°C	x 0.72
5A-6A	0.025	40°C	x 0.76
6A-7A	0.020	35°C	x 0.80
8A-9A	0.016	30°C	x 0.88
10A-11A	0.012	25°C	x 1.00
12A-13A	0.010	20°C	x 1.17
14A-16A	0.008	15°C	x 1.31
18A-20A	0.006	10°C	x 1.45

(FOR REFERENCE ONLY)

Trip Time Curve

Interrupting Characteristics @ +25 C

