

立式支架厚度: 13mm 卧式支架厚度11mm 1.5mm内六角扳手拧紧 手工测量 会有0.2mm左右误差 锌合金材质

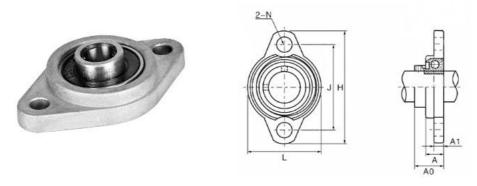

带座轴承 代号 Bearing Unit No	轴承 Shaft Dia d	9	小形尺 ⁻	螺栓 Bolt Used	重量 Weight					
	(mm)	Н	J	A1	А	Ν	L	A0		
KFL08	8	48	36	4	8.5	5	27	12	M5	26g
KFL000	10	60	45	5.5	11.5	7	36	15.5	М6	38g
KFL001	12	63	48	5.5	11.5	7	38	16	М6	42g
KFL002	15	67	53	6.5	13	7	42	18.5	М6	57g

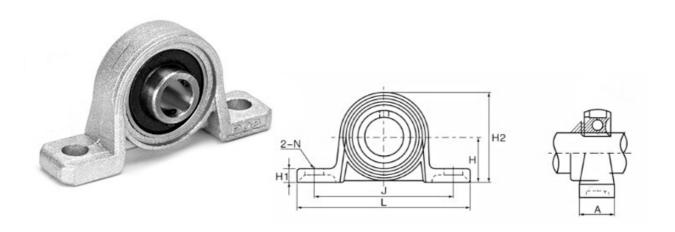

带座轴承 代号 Bearing	轴承 Shaft Dia d	外形尺寸(毫米)Dimensions(mm)							螺栓 Bolt Used	重量 Weight
Unit No	(mm)	Н	L	J	Α	N	H1	H2		
KP08	8	14	55	42	13	5	5	28	M5	33g
KP000	10	18	67	53	16	7	6	35	М6	41g
KP001	12	19	71	56	16	7	6	38	М6	47g
KP002	15	22	80	63	16	7	7	43	М6	69g

勝 特 力 材 料 886-3-5773766 胜特力电子(上海) 86-21-34970699 胜特力电子(深圳) 86-755-83298787

Http://www.100y.com.tw







颜色分类

卧式KFL08 内径8mm | 卧式KFL00 内径10mm | 卧式KFL01 内径12mm

卧式KFL02 内径15mm | 立式KP08 内径8mm | 立式KP00 内径10mm

立式KP01 内径12mm 立式KP02 内径15mm