

氟橡胶 O 型密封圈线径 2.5*外 6/7/8/9/10/11/12/13/14/15/16/17/18

颜色分类

氟胶外径 6*2.5

7*2.5

8*2.5

9*2.5

10*2.5

11*2.5

12*2.5

13*2.5

14*2.5

15*2.5

16*2.5

17*2.5

18*2.5

氟橡胶 O 型密封圈线径 5*外 28/30/32/34/35/36/37/38/40/42/44/45

氟胶O型圈
FKM

颜色分类

其他型号咨询客服

氟胶外径 28mm*线径5mm

30*5

32*5

34*5

35*5

36*5

37*5

38*5

40*5

42*5

44*5

45*5



耐高温 耐酸碱

外径测量




内径测量



线径测量



尺寸说明：外径=内径+2*线径 单位：mm

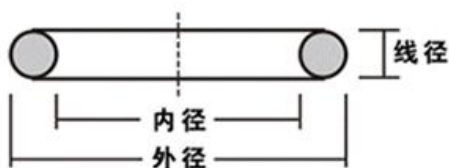

勝特力材料 886-3-5773766
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

密封件材料特点

		
NBR 丁晴橡胶 耐热120° 耐油性好 耐磨性好	VMQ 硅胶材质 耐热200° 耐油性一般 无毒 防水性好	FKM 氟胶 耐热280° 耐油性好 耐磨 耐腐蚀