


Hook-Up Wire

UL1061

Construction

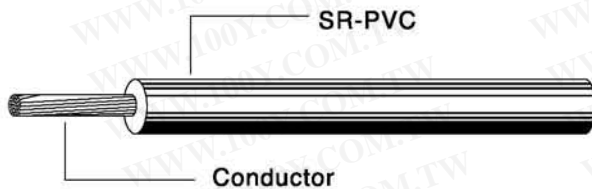

Product Description:

1. Solid or stranded, tinned or bare copper conductor, 30-16AWG
2. Color-coded semi-rigid PVC insulation
3. Rated temperature:80°C. Rated voltage: 300V
4. Uniform thickness of wire to ensure easy stripping and cutting.
5. Passes UL VW-1 & CSA FT1 vertical flame test.

Application:

1. Internal wiring of computers, office, equipment and other electronic and electrical equipment.

UL Style & CSA Type	Conductor		Insulation Thickness mm	Overall Diameter mm
	AWG	No./mm		
UL1061 CSA IIA (Stranded)	30	7/0.102	0.25	0.80±0.05
	28	7/0.127		0.90±0.05
	26	7/0.160		1.00±0.05
	24	7/0.203		1.10±0.05
	22	7/0.254		1.30±0.05
	20	7/0.320		1.50±0.05
	18	16/0.254		1.70±0.05
	16	26/0.254		2.00±0.05
UL1061 CSA IIA (Solid)	30	1/0.254		0.76±0.05
	28	1/0.32		0.83±0.05
	26	1/0.404		0.90±0.05
	24	1/0.511		1.02±0.05
	22	1/0.643		1.15±0.05
	20	1/0.813		1.32±0.05
	18	1/1.024	1.52±0.05	
	16	1/1.290	1.80±0.05	

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)