


Preliminary Data Sheet

Type Number:	55902	
System:	Nickel Metal Hydride/ KOH Electrolyte	
Nominal Voltage [V]:	1.2	
Nominal Capacity C [mAh]:	20	
Typical Capacity C [mAh]:	22	
	at 4 mA / 1.00 V	
Weight, approx. [g]	0.9	
Dimensions [mm]:	min.	max.
Diameter [d]:	11.4	11.5
Height [h]:	2	2.25
UL Recognition:	MH 13654 (N)	
Coding:	Manufacturing 5 digit code (123 = day/4 = year/ 5 = version)	
Temperature Ranges [°C]	min.	max.
Storage: less than 30 days	-40	65
Discharge:	-20	65
Charge:	0	65
Charging Method:		
Normal Charging:	2 mA for 14 – 16 h	
Accelerated Charging (20°C):	10 mA for 2.5 h	
	Time controlled, voltage control recommended	
Trickle Charging:	0.6 mA	
Overcharge (20°C):	0.6 mA continuous 2 mA up to 6 months	
Charge Retention [%] at 20°C:	80	
	Capacity available after 1 month Storage at 20°C	
Internal Resistance [Ohm]:	5	
	at charged cells, 20°C, DC: 0.2 CA/2 CA, (IEC 61951-2)	
Impedance [Ohm]:	0.5	
	at charged cells, 20°C, AC: 1kHz, (IEC 61951-2)	
Typical Capacities [mAh]:		
at 20 mA / 0.9 V	15	
at 60 mA / 0.9 V	9	
Max. Discharge Current (cont.) [mA]:	100	
Life Expectancy (typical):		
IEC Cycle:	1000 Cycles (IEC 61951-2)	
Trickle Charge:	up to 6 years (20°C)	

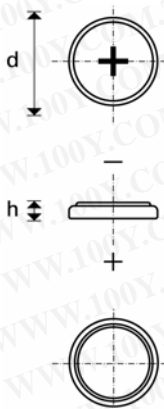

Capacities based on normal charging

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)