


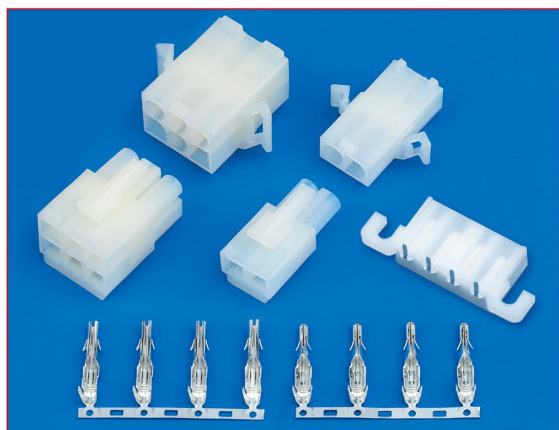


技术参数 SPECIFICATIONS

- 线数 (Poles) : 1、2、3、4、6、9、12、15
- 适用线规 (Applicable wire) : AWG20#~14#
- 适应基板厚度 (Applicable PC board thickness) : 1.6mm
- 温度范围 (Temperature range) : -25℃~85℃
- 额定电压 (Voltage rating) : 300V.Ac/Dc
- 额定电流 (Current rating) : 12A Max
- 接触电阻 (Contact resistance) : ≤0.01Ω
- 绝缘电阻 (Insulation resistance) : ≥1000MΩ
- 耐压 (Withstand voltage) : 2000V.Ac/1min
- 材料 (Material) :
 - 插头 (Plug housing) : 尼龙 (PA66) UL94V-2 (0)
 - 插座 (Receptacle housing) : 尼龙 (PA66) UL94V-2 (0)
 - 端子 (Terminal) : 磷青铜 (Phos.bronze Tin/plated)

端子 TERMINAL(3191)

型号 PART No.	适用线规 Applicable wire		电线外径 Insulation O.D	数量 Quantity
	mm ²	AWG#	mm	
HX67000-PT	0.5~2.0	20~14	1.9~3.4	2500PCS/盘
HX67001-RT	0.5~2.0	20~14	1.9~3.4	2500PCS/盘
HX67000-PTA (轻插)	0.5~2.0	20~14	1.9~3.4	2500PCS/盘

安装尺寸 MOUNTING MEASUREMENT



线数 Poles	型号 PART No.	尺寸 Dimensions(mm)	
		A	B
1	HX67000-1P	13.6	9.8
2	HX67000-2P	20.3	10.0
3	HX67000-3P	26.7	10.0
4	HX67000-4P	33.5	10.0
6	HX67000-6P	27.4	16.7
9	HX67000-9P	27.4	23.7
12	HX67000-12P	34.1	23.7
15	HX67000-15P	40.6	23.7

线数 (Poles)	额定电压 (Voltage rating)	额定电流 (Current rating)	插头 (Plug Housing)		插座 (Receptacle Housing)	
			型号 (3191)	尺寸 (mm)	型号 (3191)	尺寸 (mm)
1	300V	12A	HX67000-PT (3191)	22.2, 11.4, 10.0	HX67001-RT (3191)	22.5, 11.8, 10.0, φ2.3
			HX67001-1R (3191)	7.6, 7.8, 18, 29.9	HX67000-1P (3191)	8.1, 30, 8.1
					HX67000-1PF (3191)	8.1, 31, 8.1
2	300V	12A	HX67001-2R (3191)	14.4, 18, 29.9, 7.6, 6.7	HX67000-2P (3191)	14.7, 30, 6.7, 8.2
					HX67000-2PF (3191)	14.7, 30, 6.7, 8.2

线数 (Poles)	额定电压 (Voltage rating)	额定电流 (Current rating)	插头 (Plug Housing)	插座 (Receptacle Housing)
3	300V	10A	HX67001-3R (3191) 	HX67000-3P (3191)
				HX67000-3PF (3191)
4	300V	8A	HX67001-4R (3191) 	HX67000-4P (3191)
				HX67000-4PF (3191)
			HX67000-4WA (3191) 	

线数 (Poles)	额定电压 (Voltage rating)	额定电流 (Current rating)	插头 (Plug Housing)	插座 (Receptacle Housing)
6	300V	8A	HX67001-6R (3191) 	HX67000-6P (3191)
			HX67001-6PF (3191) 	HX67000-6P (3191)
9	300V	8A	HX67001-9R (3191) 	HX67000-9P (3191)
			HX67001-9R (3191) 	HX67000-9P (3191)
12	300V	8A	HX67001-12R (3191) 	HX67000-12P (3191)
			HX67001-12R (3191) 	HX67000-12P (3191)
15	300V	8A	HX67001-15R (3191) 	HX67000-15P (3191)
			HX67001-15R (3191) 	HX67000-15P (3191)