

# 衛 星 系 列 產 品

## 衛星分配器



SPD-2 單腳通電  
SPD-2P 全通電




SPD-3P 全通電



SPD-4 單腳通電  
SPD-4P 全通電



SPD-6 單腳通電  
SPD-6P 全通電

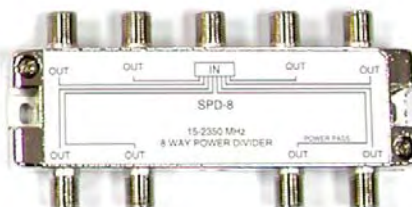

SPD-8 單腳通電  
SPD-8P 全通電

規 格											
Item	Frequency Range (MHz)	Model No.									
		SPD-2	SPD-2P	SPD-3	SPD-3P	SPD-4	SPD-4P	SPD-6	SPD-6P	SPD-8	SPD-8P
Insertion Loss	10-40	4.3	4.3	6.8	6.8	7.8	7.8	11.0	11.0	12.5	12.5
	40-806	4.5	4.8	7.0	7.0	8.5	8.5	11.0	11.0	12.5	12.5
	950-1450	5.5	6.0	8.5	8.5	9.5	9.5	14.0	14.0	15.0	15.0
	1450-2150	6.5	7.0	10.0	10.0	11.5	12.0	16.0	16.0	18.0	18.0
	2150-2350	7.0	7.5	11.0	11.0	13.0	13.0	18.0	18.0	19.5	19.5
Return Loss (Input)	10-40	12.0	12.0	8.0	8.0	8.0	8.0	6.0	6.0	7.0	7.0
	40-806	12.0	12.0	8.0	8.0	8.0	8.0	6.0	6.0	8.0	8.0
	950-1450	12.0	12.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0
	1450-2150	12.0	8.0	10.0	10.0	10.0	10.0	8.0	8.0	10.0	10.0
	2150-2350	10.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0
Return Loss (Output)	10-40	10.0	10.0	10.0	10.0	8.0	8.0	8.0	8.0	8.0	8.0
	40-806	12.0	12.0	10.0	10.0	10.0	10.0	8.0	8.0	10.0	10.0
	950-1450	12.0	12.0	10.0	10.0	10.0	10.0	7.0	7.0	10.0	8.0
	1450-2150	12.0	10.0	10.0	10.0	10.0	10.0	6.0	6.0	8.0	8.0
	2150-2350	10.0	10.0	8.0	8.0	10.0	8.0	5.0	5.0	8.0	8.0
Isolation	10-40	15.0	15.0	20.0	20.0	22.0	22.0	18.0	18.0	25.0	25.0
	40-200	20.0	20.0	22.0	22.0	25.0	25.0	20.0	20.0	22.0	22.0
	200-806	23.0	23.0	22.0	22.0	25.0	25.0	20.0	20.0	22.0	22.0
	950-1450	22.0	22.0	22.0	22.0	22.0	22.0	20.0	20.0	20.0	20.0
	1450-2150	22.0	22.0	20.0	20.0	20.0	20.0	20.0	20.0	18.0	18.0
2150-2350	20.0	20.0	20.0	20.0	20.0	20.0	18.0	18.0	16.0	16.0	

勝特力電材超市-龍山店 886-3-5773766  
 勝特力電材超市-光復店 886-3-5729570  
 勝特力電子(上海) 86-21-34970699  
 勝特力電子(深圳) 86-755-83298787  
<http://www.100y.com.tw>