


BCD CODE DISPLAYS PART NUMBER

TYPE : LD33	LD33	12	S	R	2	POWER 1: 12VDC VOLTGE : 2: 24VDC 5: 5VDC
INPUT TYPE :	12: (BCD CODE) 0~9					
	14: (BCD CODE) 0~F					
	31: (-BCD CODE) 0~9					
TERMINATIONS TYPE :	S: SOCKET					DISPLAY R: RED COLORS: G: GREEN
	P: P.C.B.					

DIMENSIONS :

Unit : mm

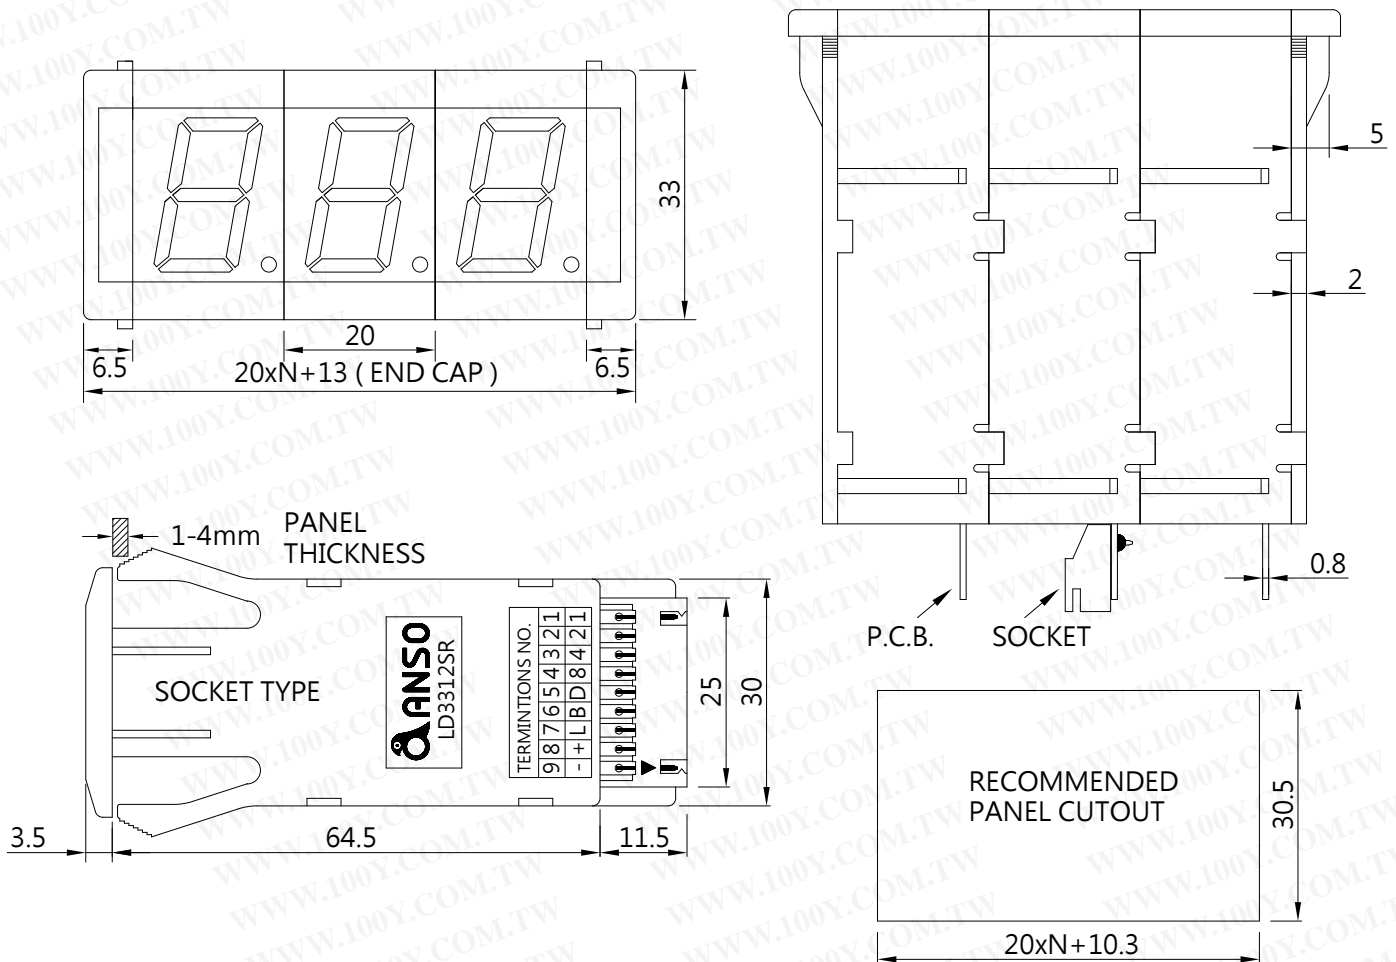

FUNCTION : LD3312

TERMINTIONS NO.	LINE COLORS	CONTROL
1. BCD/1	BROWN	1.
2. BCD/2	ORANGE	2.
3. BCD/4	YELLOW	3.
4. BCD/8	GRAY	4.
5. DP/LAMP	GREEN	5.
6. BLANK	PURPLE	6.
7. LATCH	BLUE	7.
8. DC/24V+(INPUT POWER)	RED	8. +
9. DC/0V-(INPUT POWER)	BLACK	9. -

LED DISPLAY OUTPUT	INPUT						
	1	2	4	8	DP/LA	BL	0V
0							●
1	●						●
2		●					●
3	●	●					●
4			●				●
5	●		●				●
6		●	●				●
7	●	●	●				●
8				●			●
9	●			●			●
DP/LAMP					●		●
LATCH						●	●
BLANK						●	●