


# SOCKET TYPE ILLUMINATED SWITCHES & PUSHBUTTON SWITCHES

## Rectangular




勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)


Bottom view

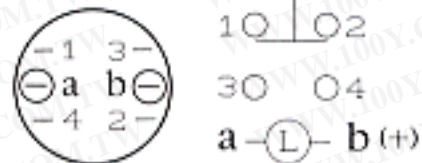

■ Mounting dimensions, mm

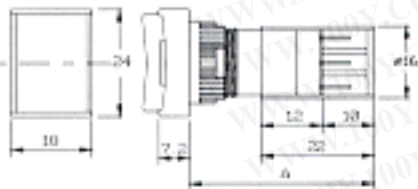

Dimensions, mm

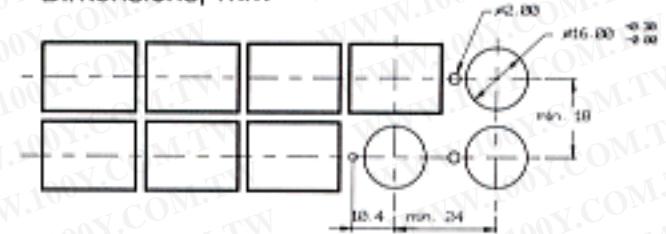


# SOCKET TYPE ILLUMINATED SWITCHES & PUSHBUTTON SWITCHES

## Square




■ Mounting dimensions, mm

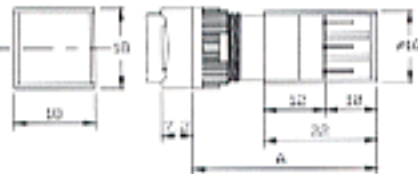

■ Bottom view



■ Dimensions, mm

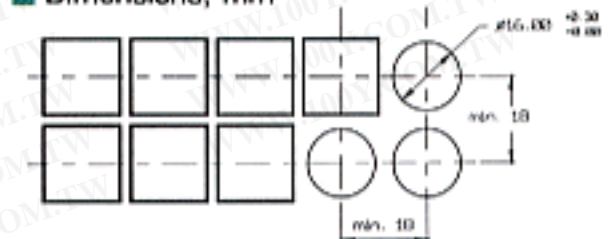

Description	Type	Contact block diagram (button not depressed)	Mounting length(A)
Illuminated or non-illuminated pushbutton 1 pole momentary action	SPST		40 mm
Illuminated or non-illuminated pushbutton 1 pole alternate action	SPST		40 mm

# SOCKET TYPE ILLUMINATED SWITCHES & PUSHBUTTON SWITCHES

## Round




勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)


### Mounting dimensions, mm



### Bottom view

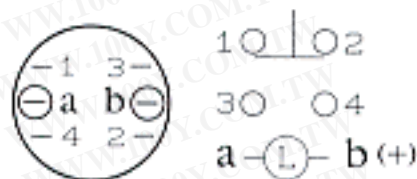

### Dimensions, mm

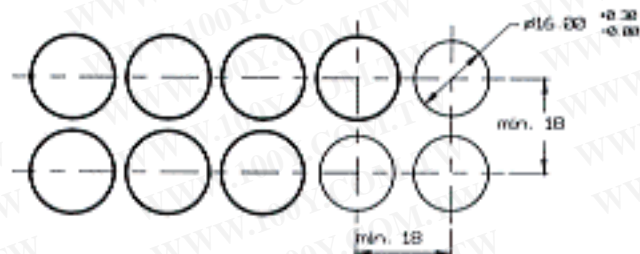

Description	Type	Contact block diagram (button not depressed)	Mounting length (A)
Illuminated or non-illuminated pushbutton 1 pole momentary action	SPST		40 mm
Illuminated or non-illuminated pushbutton 1 pole alternate action	SPST		40 mm

NOTES: As usual, silver contactors are commonly used. However, if it is used for small signal, we wish to recommend the use of gold plated contactors for which you are most welcome to contact with us for detailed specifications



# SOCKET TYPE PUSHBUTTON SWITCHES ORDER INFORMATION

Order no : P16  -


φ 16 mm basic type : \_\_\_\_\_

Function : \_\_\_\_\_

LA : Socket type pushbutton switches with alternate action

LM : Socket type pushbutton switches with momentary action

Pushbutton head : \_\_\_\_\_

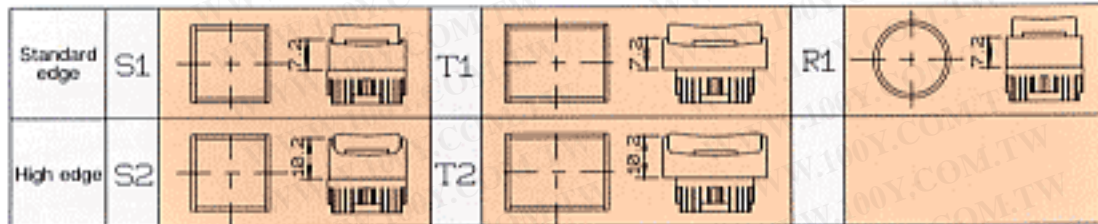

Contact Arrangement : \_\_\_\_\_

tab : 1 NO + 1 NC

Lamp and Voltage : \_\_\_\_\_

0 : Without lamp

A : Incandescent 6 V AC/DC 200mA

B : Incandescent 14 V AC/DC 80mA

C : Incandescent 28 V AC/DC 40mA

F : Neon 110 V AC green / red

G : Neon 220 V AC green / red

H : LED 6 V DC green / yellow / red

J : LED 12 V DC green / yellow / red

K : LED 24 V DC green / yellow / red

勝特力材料 886-3-5753170

勝特力电子(上海) 86-21-54151736

勝特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

Special type :

M : Incandescent 6V AC/DC 40 mA

N : Incandescent 14V AC/DC 40 mA

L : Incandescent 33V AC/DC 35 mA

D : Incandescent 48V AC/DC 25 mA

E : Incandescent 60V AC/DC 20 mA

Color Lens : \_\_\_\_\_

B : Blue G : Green O : Orange

R : Red W : White Y : Yellow

Order Example :

If you want to order a round head illuminated pushbutton switch with a yellow color lens 60V DC 20 mA incandescent lamp, 1NO +1NC contact, alternate action

It's order # as : P16LARI-1abEY

If you want to order a rectangular head with high edge, non-illuminated pushbutton switch with red color lens, 1NO + 1NC contact momentary action

It's order # as : P16LMT2-1abOR

## Incandescelncandescent (AC/AD)

- 50-004-01 : 6V 40mA
- 50-004-02 : 6V 200mA
- 50-004-03 : 14V 40mA
- 50-004-04 : 14V 80mA
- 50-004-05 : 28V 40mA
- 50-004-06 : 48V 25mA
- 50-004-07 : 60V 20mA
- 50-004-08 : 33V 35mA



**勝特力材料 886-3-5753170**  
**勝特力电子(上海) 86-21-54151736**  
**勝特力电子(深圳) 86-755-83298787**  
[Http://www.100y.com.tw](http://www.100y.com.tw)

Category	Shape	Color	Parts No	Illustration
Lamps	Incandescent (AC/AD)	6V 40mA	50-004-01	
		6V 200mA	50-004-02	
		14V 40mA	50-004-03	
		14V 80mA	50-004-04	
		28V 40mA	50-004-05	
		48V 25mA	50-004-06	
		60V 20mA	50-004-07	
		33V 35mA	50-004-08	
	Neon (AC)	110V green	50-004-11	
		110V red	50-004-12	
		220V green	50-004-13	
		220V red	50-004-14	
	LED (DC)	6V green	50-004-16	
		6V red	50-004-17	
		6V yellow	50-004-18	
		12V green	50-004-19	
		12V red	50-004-20	
		12V yellow	50-004-21	
		24V green	50-004-22	
		24V red	50-004-23	
	24V yellow	50-004-24		