
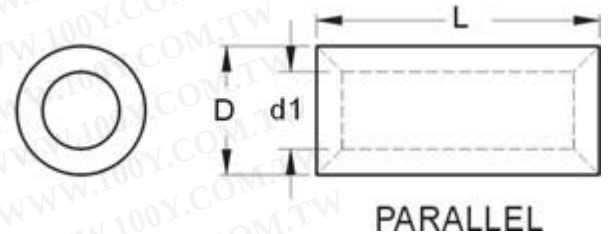


NON-INSULATED PARALLEL & BUTT CONNECTORS

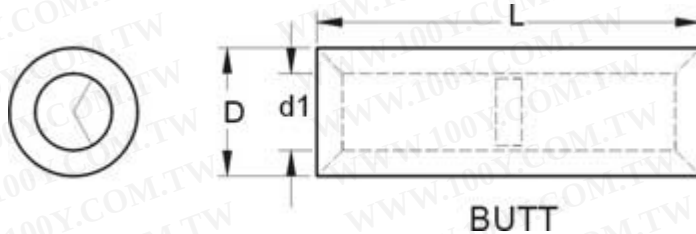

MAXIMUM ELECTRIC CURRENT:

A.W.G.	26	24	22	20	18	16	14	12	10	8	6	4	2	1/0	2/0	3/0	4/0	250	300	350	400	500	600
AMP.	5.5	7	9	12	17	18	30	35	50	70	95	125	170	230	265	310	360	405	445	505	545	620	690

TERMINAL MATERIAL: COPPER TUBULAR

WIRE RANGE A.W.G. mm ²	ITEM NO.			DIMENSION inch(mm)				Q'TY BOX
	PARALLEL	I	BUTT	L	D	d1	T	
26-22 A.W.G. 0.2-0.5 mm ²	 PNT0.5	0.197 5.00	 BNT0.5	0.472 12	0.083 2.100	0.051 1.3	0.016 0.4	1000
22-16 A.W.G. 0.5-1.5 mm ²	 PNT1	0.315 8.00	 BNT1	0.591 15	0.130 3.300	0.067 1.7	0.031 0.8	1000
	 PNT1	0.315 8.00	 BNT1-16	0.63 16	0.130 3.300	0.067 1.7	0.031 0.8	1000
16-14 A.W.G. 1.5-2.5 mm ²	 PNT2	0.315 8.00	 BNT2	0.591 15	0.154 3.900	0.091 2.3	0.031 0.8	1000
	 PNT2	0.315 8.00	 BNT2-16	0.63 16	0.154 3.900	0.091 2.3	0.031 0.8	1000
14-12 A.W.G. 2.5-4	 PNT3	0.335 8.50	 BNT3	0.591 15	0.197 5.000	0.118 3	0.039 1	1000

mm ²								
12-10 A.W.G.	 PNT5	0.335 8.50	 BNT5	0.591 15	0.213 5.400	0.134 3.4	0.037 1	1000
4-6 mm ²	 PNT5	0.335 8.50	 BNT5-20	0.787 20	0.213 5.400	0.134 3.4	0.037 1	1000
8 A.W.G.	 PNT8	0.374 9.50	 BNT8	0.827 21	0.276 7.000	0.181 4.6	0.047 1.2	1000/500
8 mm ²								

WIRE RANGE A.W.G. mm ²	ITEM NO.			DIMENSION inch(mm)				Q'TY BOX
	PARALLEL	I	BUTT	L	D	d1	T	
6 A.W.G.	 PNT14	0.433 11.00	 BNT14	1.024 26	0.350 8.900	0.232 5.9	0.059 1.5	500
14 mm ²								
6 A.W.G.	 PNT16-8 NEW	0.315 8.00	 BNT16	- -	.374 9.5	0.272 6.9	0.052 1.32	100
16 mm ²								
4 A.W.G.	 PNT22	0.531 13.50	 BNT22	1.142 29	0.445 11.300	0.307 7.8	0.069 1.75	250
22 mm ²	 PNT22	0.531 13.50	 BNT22-58	2.283 58	0.445 11.300	0.307 7.8	0.069 1.75	250
2 A.W.G.	 PNT38	0.650 16.50	 BNT38	1.26 32	0.520 13.200	0.374 9.5	0.073 1.85	250/200
38 mm ²	 PNT38	0.650 16.50	 BNT38-64	2.52 64	0.520 13.200	0.374 9.5	0.073 1.85	250/200
1/0 A.W.G.	 PNT60	0.748 19.00	 BNT60	1.417 36	0.602 15.300	0.449 11.4	0.077 1.95	100
60 mm ²	 PNT60	0.748 19.00	 BNT60-72	2.835 72	0.602 15.300	0.449 11.4	0.077 1.95	100

2/0 A.W.G. 70 mm ²	 PNT70	0.748 19.00	 BNT70	1.457 37	0.689 17.500	0.524 13.3	0.083 2.1	100
3/0 A.W.G. 80 mm ²	 PNT80	0.768 19.50	 BNT80	1.496 38	0.768 19.500	0.571 14.5	0.098 2.5	50
	 PNT80	0.768 19.50	 BNT80-76	2.992 76	0.768 19.500	0.571 14.5	0.098 2.5	50
4/0 A.W.G. 100 mm ²	 PNT100	0.787 20.00	 BNT100	1.496 38	0.870 22.100	0.646 16.4	0.112 2.85	50
	 PNT100	0.787 20.00	 BNT100-76	2.992 76	0.870 22.100	0.646 16.4	0.112 2.85	50
250/300 MCM 150 mm ²	 PNT150	1.063 27.00	 BNT150	2.126 54	1.039 26.400	0.768 19.5	0.136 3.45	25
	 PNT150	1.063 27.00	 BNT150-108	4.252 108	1.039 26.400	0.768 19.5	0.136 3.45	25

WIRE RANGE A.W.G. mm ²	ITEM NO.			DIMENSION inch(mm)				Q'TY BOX
	PARALLEL	I	BUTT	L	D	d1	T	
300/350 MCM 180 mm ²	 PNT180	1.122 28.50	 BNT180	2.244 57	1.122 28.500	8.27 21	0.148 3.75	10
	 PNT180	1.112 28.50	 BNT180-114	4.488 114	1.122 28.500	8.27 21	0.148 3.75	10
400/500 MCM 200 mm ²	 PNT200	1.260 32.00	 BNT200	2.48 63	1.276 32.400	0.945 24	0.165 4.2	10
	 PNT200	1.260 32.00	 BNT200-126	4.961 126	1.276 32.400	0.945 24	0.165 4.2	10
500/600 MCM 325 mm ²	 PNT325	1.457 37.00	 BNT325	2.835 72	1.457 37.000	1.102 28	0.177 4.5	5

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)