


产品信息

产品尺寸




产品参数 COB低压灯带LS161

瓦数/米 (W/m)	8.5			13		
流明/米 (lm/m)	720	750	800	1050	1100	1200
寿命 (hr)	20000					
灯珠数量 (颗/m)	320					
显色指数	≥90					
色温 (K)	3000	3500	4000	3000	3500	4000
色容差	≤5					
PCB	双层					
PCB宽度 (mm)	8					
电压 (V)	24					
每卷长度	10m					

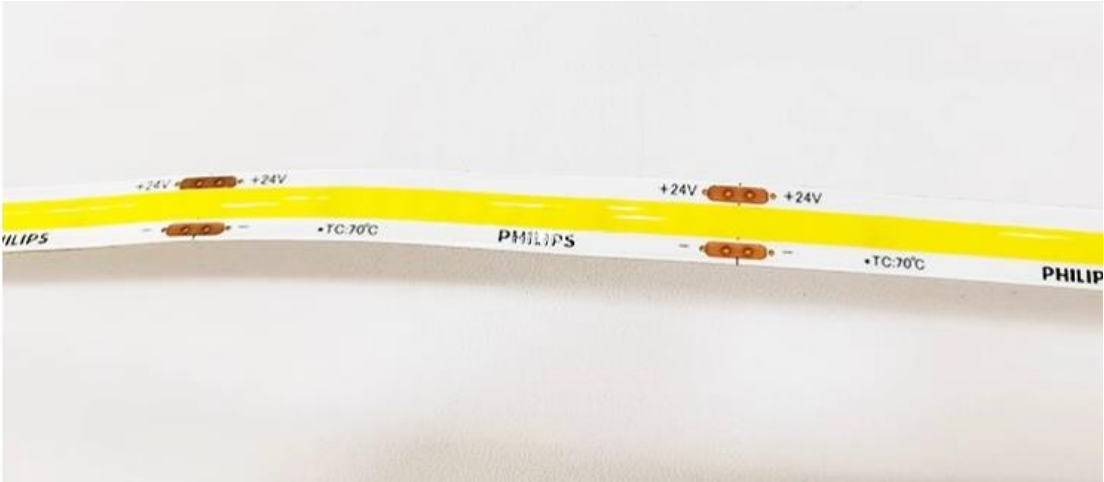


COB灯带裁剪焊接示意图

温馨提示：此方法需要烙铁、焊接导电线，锡线
灯条剪好后自己用烙铁焊线，或者联系客服定制尺寸

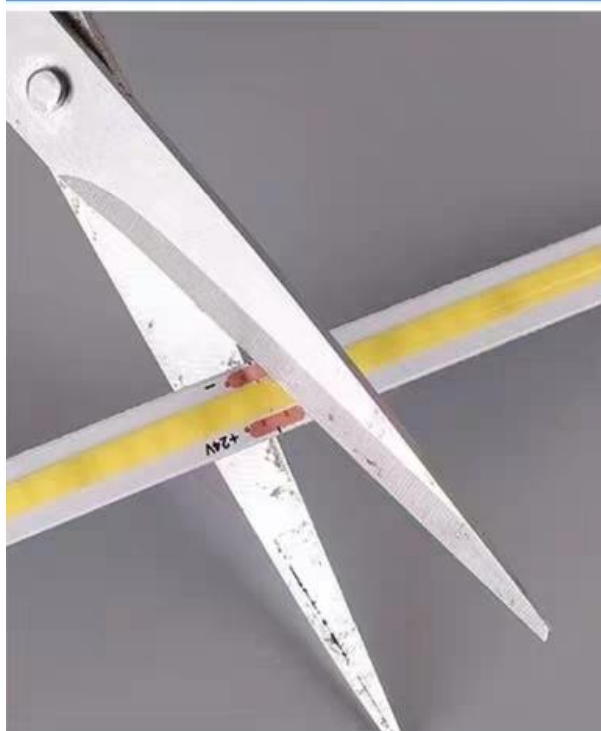

1.如图在铜焊盘中间
有一条黑线 沿线剪开

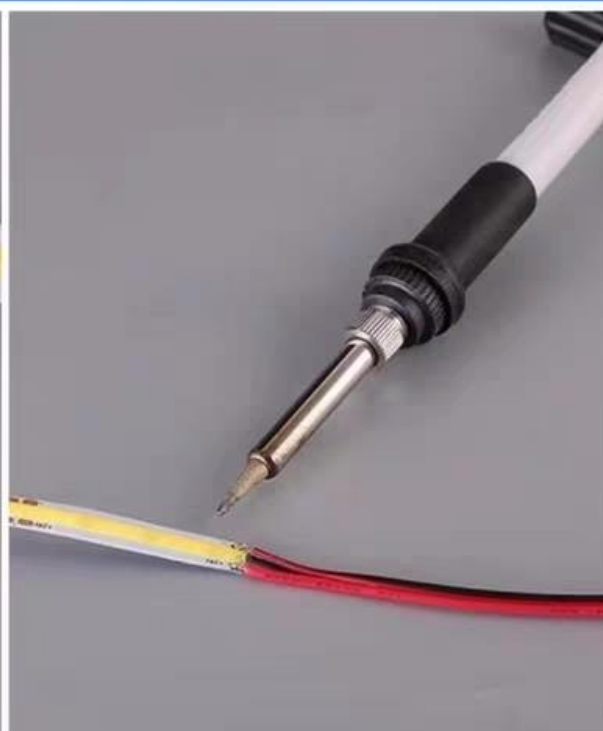

2.裁剪完后，在铜焊盘位置上锡
然后将线头置于锡堆上





24V电压安心用

安全电压可直接触摸

濠门高性能柔性+自粘

可任意折叠抗折力高，可弯曲，附着力强，即可做多种造型



粘性超强

PHILIPS

COB低压灯带

LS161

高亮明丽 均匀流畅

飞利浦COB低压灯带LS161



舒适优选
怡目设计

* 访问www.Philips.com/eyecomfort了解关于闪光、频闪和其他标准以及产品信息。



均匀流畅光



CRI 90



应用广泛



耐用安全

整条灯带色彩色温均匀 无可见色差

灯带具有优质的光色一致性
色容差 (SDCM ≤ 5)



安全耐用

性能可靠，底板采用特殊PCB工艺
整根灯带连续无拼接



环保材料
符合RoHS环保标准
减少家装污染

Product compliance report

BOMcheck.com

Detailed parts compliance report

Report generated: 2020-09-01 10:07

@ignify

Signify
BOMcheck.com
All rights reserved. Confidential. 2020-09-01
Declaration authorized by
Dow Chemical, Inc.

Declaration effective from: 2020-09-01 (approved on 2020-09-01) (GMT)

RoHS compliance verification (Directive 2002/95/EC)

Substance	Maximum concentration	Do all single components contain less than the maximum concentration?
Cadmium (Cd)	0.01%	Yes
Chromium (VI) compounds	0.01%	Yes
Lead (Pb)	0.1%	Yes
Mercury (Hg)	0.01%	Yes
Polybrominated diphenyl ethers (PBDEs)	0.01%	Yes
Polybrominated diphenyl ethers (PBDEs)	0.01%	Yes

RoHS compliance verification (Directive 2002/95/EC) as amended by Directive (EU) 2015/863 (RoHS 2)

Substance	Maximum concentration	Do all single components contain less than the maximum concentration?
Bis(2-ethylhexyl) phthalate (DEHP)	0.01%	Yes
Bis(2-benzyl) phthalate (BBP)	0.01%	Yes
Diethyl phthalate (DEHP)	0.01%	Yes
Dibutyl phthalate (DBP)	0.01%	Yes

REACH restriction for substances which may be found in articles (Regulation (EC) No 1907/2006)

Substance	Maximum concentration	Does the part contain less than the maximum concentration?
Substances of persistent toxicological concern (SVHC)	0.1% w/w	Yes

Page 1

Report generated: 2020-09-01 10:07 (GMT)

三种色温/两种亮度可选

可根据使用场景选择相应色温和亮度
满足多种应用需求 营造相宜氛围

3000K黄光
温馨舒适

3500K中性光
怡静高雅

4000K白光
集中精神



适用于多种场景

加长版 **10米/卷**，满足更多安装应用

3M 背胶，长效耐用



厨房



衣柜



卧室



踢脚线



客厅

显色指数升级

还原真实色彩，营造自然光线



显色指数高

$\text{CRI} \geq 90$



显色指数低

$\text{CRI} \leq 90$