

STON

COMPACT SIZE
 POWER ON-DELAY
 MULTI-RANGE TIMER

泛用型限時繼電器



AH3-□

- CE Approved by TUV MIKES.
- STON or P&B RELAY inside.
- Using MOTOROLA CMOS IC.
- Multi-range & Contact can be changeable.
- 德國 TUV 實驗室 CE 認證。
- 內部採用美國第一品牌 P&B 繼電器。
- 使用 MOTOROLA 計時 IC。
- 可變化時間單位及接點。

ORDERING INFORMATION 訂購說明

Ex. AH3 **B** **A220**

Timer type 型式	Timer range 時間範圍		Operating voltage 電壓範圍
A:AH3-A B:AH3-B C:AH3-C D:AH3-D	A	1S/10S/1M/10M	D12: DC12V D24: DC24V D48: DC48V
	B	3S/30S/3M/30M	A12: AC12V A24: AC24V
	C	6S/60S/6M/60M	A110: AC110V A220: AC220V
	D	1M/10M/1H/10H	A240: AC240V A380: AC380V
			A440: AC440V


SPECIFICATIONS & CHARACTERISTICS 規格 & 特性

Type 型式	AH3-A	AH3-B	AH3-C	AH3-D
Rate operation voltage 額定電壓	DC: 12V/24V/48V AC: 12V/24V/110V/220V/240V/380V/440V			
Operating voltage range 電壓使用範圍	DC: 85%~110% AC: 80%~110%			
Rated frequency 額定頻率	AC: 50~60Hz			
Rated power consumption 額定功率消耗	About: 2VA			
Rated control capacity 輸出容量	DC: 5A 28VDC AC: 5A 250VAC P.F.=1			
Setting accuracy 設定誤差	± 10%			
Reset time 復歸時間	Less than 0.1s			
Life 壽命	Mechanical 機械		5000000	
	Electrical 電氣		100000	
Output arrangement 輸出方式	Timed-out 1 form C ◦ Instantaneous 1 form C / Timed-out 2 form C			
Max. temperature rise 最大溫升	55 deg.			
Ambient temperature 周圍溫度	-10°C to +65°C 但不結冰結露 But no ice			
Ambient humidity 周圍溼度	Max. 85% RH			
Weight 重量	About 180g			


AH3-A/AH3-B/AH3-C/AH3-D

DIMENSIONS 规格尺寸


AH3-□

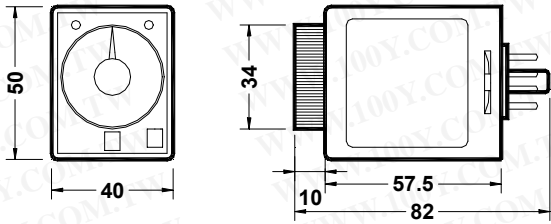


AH3-□ + Y-40

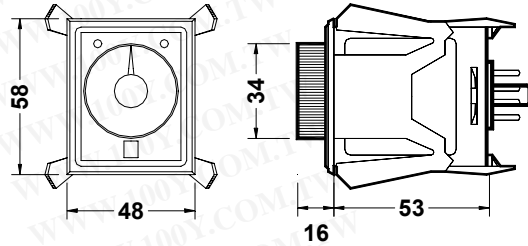


AH3-□ + PF085A




AH3-□ + US-08



AH3-□ + P3G-08




INSERT HOLE






OPERATION 操作方式

Mode A

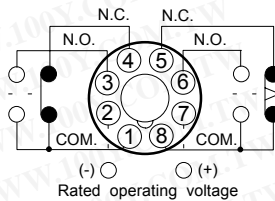

Mode B

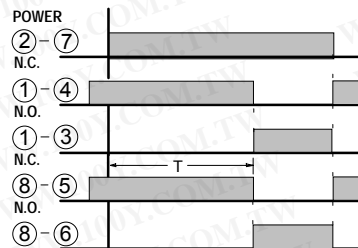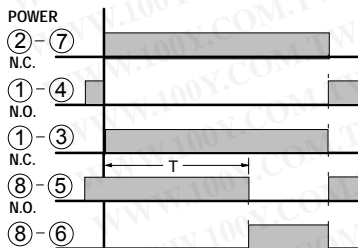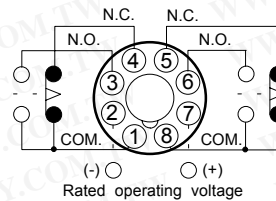

COM : Common terminal
 N.C. : Normally closed contact
 N.O. : Normally open contact
 ● ▲ : Timed out contact
 ○ ○ : Instantaneous contact

- NOTE:
- Set time should be greater than min. operation time.
 - Once power is cut off or timing operation is completed, power off time is needed to start the operation again.
 - Do not change the set time during operation.
 - When changing set time, cut off power and set the time.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)