


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

銅外六角螺絲

(尺寸有輕微誤差)

名称	銅外六角螺絲
材质	銅
标准	DIN933
表面处理	未經過處理
包裝說明	朔料袋/紙盒

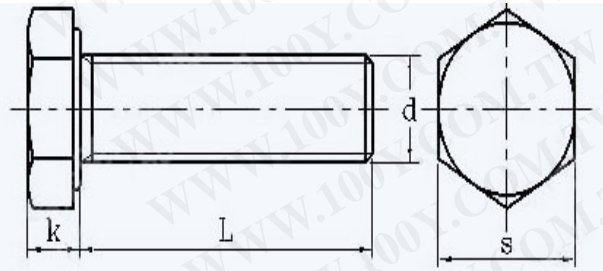

單位:MM

公称直径 d	螺紋 P	k				max	S		
		A		B			min	A	B
		max	min	max	min				
M4	0.7	2.92	2.62	3	2.8	7	6.78	6.64	
M5	0.8	3.65	3.35	3.74	3.26	8	7.78	7.64	
M6	1	4.15	3.85	4.24	3.76	10	9.78	9.64	
M7	1	4.95	4.65	5.04	4.56	11	10.73	10.57	
M8	1.25	5.45	5.15	5.54	5.06	13	12.73	12.57	
M10	1.5	6.56	6.22	6.69	6.11	17	16.73	16.57	
M12	1.75	7.68	7.32	7.79	7.21	19	18.67	18.48	
M14	2	8.98	8.62	9.09	8.51	22	21.67	21.16	
M16	2	10.18	9.82	10.29	9.71	24	23.67	23.16	
M18	2.5	11.72	11.28	11.85	11.15	27	26.67	26.15	
M20	2.5	12.72	12.28	12.85	12.15	30	29.67	29.16	
M22	2.5	14.22	14.35	14.35	13.65	32	31.61	31	



1. 标准外六角

Standard hex

安装过程中不易出现滑头现象，可以使工具快速安装节约时间。

The installation process is not prone to slipping phenomenon, so that quickly install the tool to save time.

2. 螺纹精细

Fine Thread

表面光滑完整，螺丝口深邃，受力均匀不容易脱牙。

Surface smooth and complete, screw mouth deep, even by force is not easy to take off teeth.



3. 平整无毛刺

Smooth and no glitches

表面平整光滑无毛刺，做工优质，坚固耐用。

Smooth surface without burr, with quality, durable.

