

K-210

CIRCULAR SAW



■ Disk cutter (K-210-2), with angle guide and parallel guide

■ Power cable: 2m

Rotation speed 3500 to 6000 rpm

Standard disk cutter K-210-2

Rated voltage / frequency 100 VAC 50 / 60 Hz


Power consumption 200 W

Rated time 15 minutes

External dimensions 300 (W) × 170 (H) × 260 (D) mm *

Weight 5.8 kg

* Max. width (500 mm) when work table is fully extended.

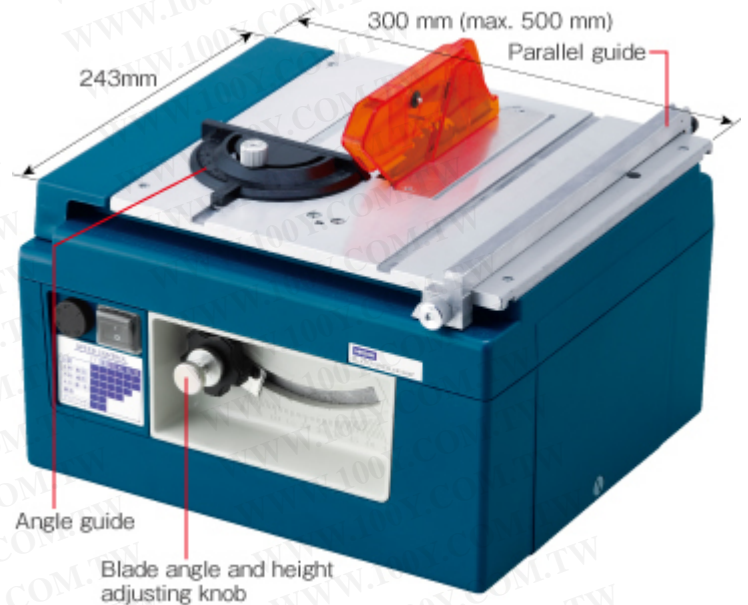

Cutting capacity

Sheet material type	Sheet thickness mm	Compatible disk cutters
PCB	Glass epoxy 3	K-210-3
	Ceramic	
	Steel sheet 1	
	(without heat treatment)	
Metal	Aluminum sheet 5	K-210-2 (standard)
	(pure aluminum)	
	Plastic 10	
	Wood 26	K-210-1



Max. table width of 500 mm when the table guide is extended



Example of angle guide

※ Various types of cuts are possible by changing the guide setting.


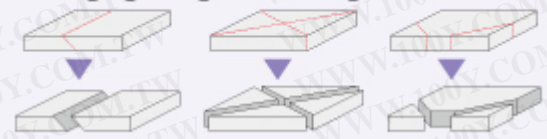


Table surface-to-blade height (max)



Replacement parts

DISK CUTTERS (K-210 dedicated blade)

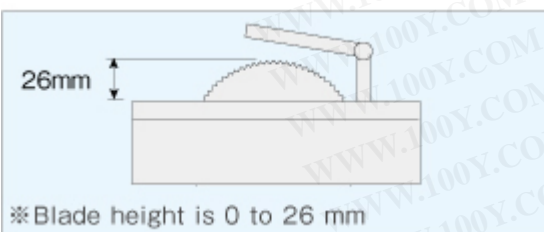

Part no.	Types	Number of teeth	Outer dia. mm ϕ	Blade thickness mm	Application
K-210-1	Saw	80 teeth		1.0	Wood
K-210-2	Carbide	24 teeth	85	1.2	Metal & plastic
K-210-3	Diamond (grid No.: #150)	-		0.8	PCB & metal

K-210-1



K-210-2



K-210-3



勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)