


勝特力電材超市-龍山店 886-3-5773766
 勝特力電材超市-光復店 886-3-5729570
 勝特力電子(上海) 86-21-34970699
 勝特力電子(深圳) 86-755-83298787
<http://www.100y.com.tw>

AD-A8D3

SMA Jack To MCX Plug
6GHz VSWR 1.2

50Ω

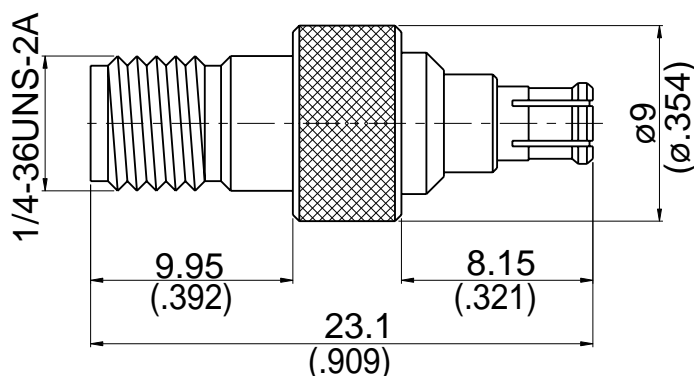

Parts	Material	Plating (Micro-inch)
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	
Body(MCX)	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Body(SMA)	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20

Weight: 3.98 g


This part number complies with RoHS.

Notice: JYBAO reserves the right to make modifications deemed appropriate.

AD-A8D3	SMA Jack To MCX Plug 6GHz VSWR 1.2																						
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Interface</div> Standard Mechanically Compatible With	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">SMA</th> <th style="width: 50%;">MCX</th> </tr> </thead> <tbody> <tr> <td>MIL-STD-348B</td> <td>IEC 61169-36</td> </tr> <tr> <td>2.92 & 3.5</td> <td></td> </tr> </tbody> </table>	SMA	MCX	MIL-STD-348B	IEC 61169-36	2.92 & 3.5																	
SMA	MCX																						
MIL-STD-348B	IEC 61169-36																						
2.92 & 3.5																							
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Electrical Data</div> Impedance Frequency Range VSWR Insertion Loss Insulation Resistance Dielectric Withstanding Voltage (at sea level) Working Voltage (at sea level)	<table style="width: 100%;"> <tbody> <tr> <td style="width: 50%;">Impedance</td> <td colspan="2">50Ω</td> </tr> <tr> <td>Frequency Range</td> <td colspan="2">DC To 6GHz</td> </tr> <tr> <td>VSWR</td> <td colspan="2">≤ 1.2 (DC To 6GHz)</td> </tr> <tr> <td>Insertion Loss</td> <td colspan="2">≤ 0.03 x √f(GHz) dB</td> </tr> <tr> <td>Insulation Resistance</td> <td colspan="2">≥ 5000MΩ</td> </tr> <tr> <td>Dielectric Withstanding Voltage (at sea level)</td> <td colspan="2">750 V rms</td> </tr> <tr> <td>Working Voltage (at sea level)</td> <td colspan="2">250 V rms</td> </tr> </tbody> </table>		Impedance	50Ω		Frequency Range	DC To 6GHz		VSWR	≤ 1.2 (DC To 6GHz)		Insertion Loss	≤ 0.03 x √f(GHz) dB		Insulation Resistance	≥ 5000MΩ		Dielectric Withstanding Voltage (at sea level)	750 V rms		Working Voltage (at sea level)	250 V rms	
Impedance	50Ω																						
Frequency Range	DC To 6GHz																						
VSWR	≤ 1.2 (DC To 6GHz)																						
Insertion Loss	≤ 0.03 x √f(GHz) dB																						
Insulation Resistance	≥ 5000MΩ																						
Dielectric Withstanding Voltage (at sea level)	750 V rms																						
Working Voltage (at sea level)	250 V rms																						
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Mechanical Data</div> Recommended Coupling Nut Torque Coupling Proof Torque Engagement Force Disengagement Force Contact Captivation-axial Durability (mating)	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;"></th> <th style="width: 25%;">SMA</th> <th style="width: 25%;">MCX</th> </tr> </thead> <tbody> <tr> <td>Recommended Coupling Nut Torque</td> <td>4 in-lbs</td> <td>NA</td> </tr> <tr> <td>Coupling Proof Torque</td> <td>5.3 in-lbs</td> <td>NA</td> </tr> <tr> <td>Engagement Force</td> <td>NA</td> <td>≤ 5.6 lbs</td> </tr> <tr> <td>Disengagement Force</td> <td>NA</td> <td>1.8 to 4.5 lbs</td> </tr> <tr> <td>Contact Captivation-axial</td> <td>≥ 6.1 lbs</td> <td>≥ 2.3 lbs</td> </tr> <tr> <td>Durability (mating)</td> <td>≥ 100</td> <td>≥ 500</td> </tr> </tbody> </table>			SMA	MCX	Recommended Coupling Nut Torque	4 in-lbs	NA	Coupling Proof Torque	5.3 in-lbs	NA	Engagement Force	NA	≤ 5.6 lbs	Disengagement Force	NA	1.8 to 4.5 lbs	Contact Captivation-axial	≥ 6.1 lbs	≥ 2.3 lbs	Durability (mating)	≥ 100	≥ 500
	SMA	MCX																					
Recommended Coupling Nut Torque	4 in-lbs	NA																					
Coupling Proof Torque	5.3 in-lbs	NA																					
Engagement Force	NA	≤ 5.6 lbs																					
Disengagement Force	NA	1.8 to 4.5 lbs																					
Contact Captivation-axial	≥ 6.1 lbs	≥ 2.3 lbs																					
Durability (mating)	≥ 100	≥ 500																					
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Environmental Data</div> Temperature Range Thermal Shock Moisture Resistance Corrosion RoHS	<table style="width: 100%;"> <tbody> <tr> <td style="width: 50%;">Temperature Range</td> <td colspan="2">-55°C to +155°C</td> </tr> <tr> <td>Thermal Shock</td> <td colspan="2">MIL-STD-202, Method 107, Condition B</td> </tr> <tr> <td>Moisture Resistance</td> <td colspan="2">MIL-STD-202, Method 206</td> </tr> <tr> <td>Corrosion</td> <td colspan="2">MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td>RoHS</td> <td colspan="2">Compliant</td> </tr> </tbody> </table>		Temperature Range	-55°C to +155°C		Thermal Shock	MIL-STD-202, Method 107, Condition B		Moisture Resistance	MIL-STD-202, Method 206		Corrosion	MIL-STD-202, Method 101, Condition B		RoHS	Compliant							
Temperature Range	-55°C to +155°C																						
Thermal Shock	MIL-STD-202, Method 107, Condition B																						
Moisture Resistance	MIL-STD-202, Method 206																						
Corrosion	MIL-STD-202, Method 101, Condition B																						
RoHS	Compliant																						

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-A8D3 (+AD-A3D8)

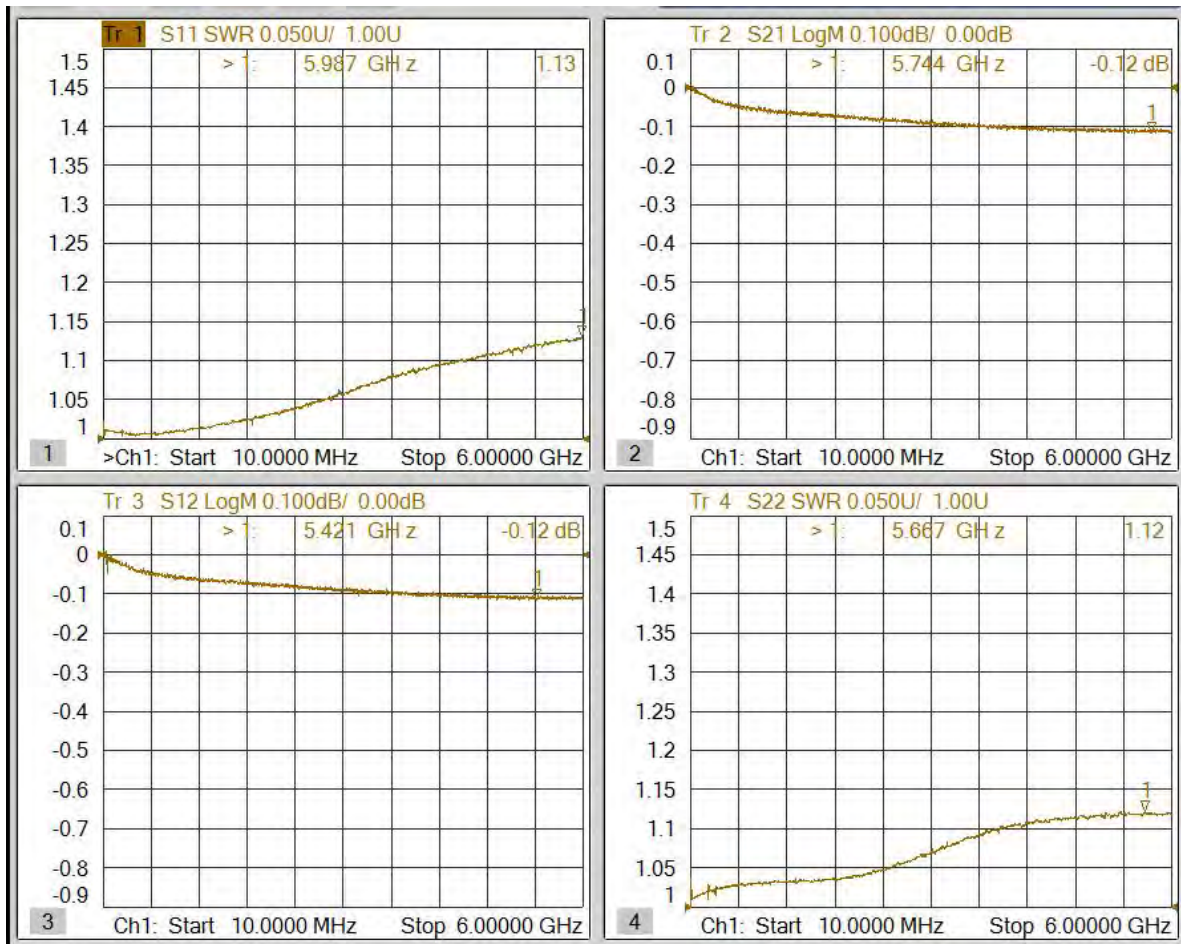

Notes:

1. IL of AD-A8D3+AD-A3D8 measured
2. $IL/2 = IL$ of AD-A8D3

勝特力電材超市-龍山店 886-3-5773766
勝特力電材超市-光復店 886-3-5729570
勝特力電子(上海) 86-21-34970699
勝特力電子(深圳) 86-755-83298787
<http://www.100y.com.tw>