
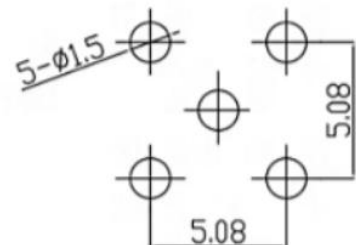


产品规格书

PRODUCT SPECIFICATION

产品型号Model: SMA-KYWHD16

频率Frequency:DC-3GHz

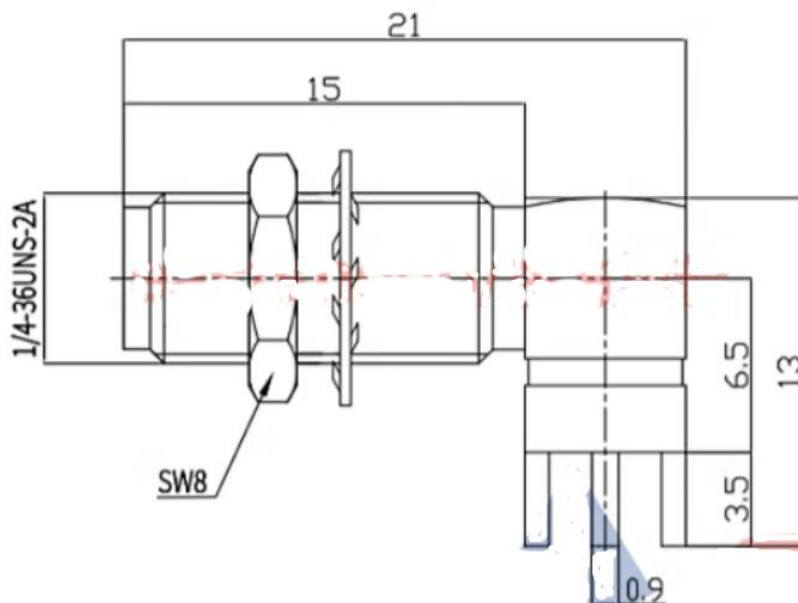

Recommend mounting hole
建议安装孔

注 Note: 尺寸 Dimensions (mm)

产品参数 Product parameters

1.电气 Electrical

1.1	阻抗 Impedance	50Ω
1.2	频率范围 Frequency range	DC-3GHz
1.3	驻波 VSWR	≤1.25
1.4	介质耐压 Dielectric withstanding voltage	1000V rms
1.5	内导体接触电阻 Internal conductor contact resistance	≤3mΩ
1.6	外导体接触电阻 External conductor contact resistance	≤2mΩ
1.7	绝缘电阻 Insulation resistance	≥5000MΩ

2.环境与机械 Environment and Machinery

2.1	温度范围 Temperature range	-45°~+125°
2.2	耐久性 Durability	500cycles

3.材料和镀层 Material and Plating

3.1	内导体 Inner conductor	磷铜镀金 Phosphorus copper gold plating
3.2	外导体 Outer conductor	黄铜镀金 Brass gold plated
3.3	绝缘体 Insulator	聚四氟乙烯 PTFE

勝特力電材超市-龍山店 886-3-5773766
勝特力電材超市-光復店 886-3-5729570
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
<http://www.100y.com.tw>