

LOC		DIST		REVISONS				
AD		47		REV	DESCRIPTION	DATE	DWN	APVD
				A1	REVISED PER ECO-11-004835	11MAR11	RK	HMR


勝特力電材超市-龍山店 886-3-5773766  
勝特力電材超市-光復店 886-3-5729570  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
<http://www.100y.com.tw>

3.000[76.2]	6	3.450[87.63]	3.900[99.06]	4.000[101.6]	266	5767054-7
2.500[63.5]	5	2.950[74.93]	3.400[86.36]	3.500[88.9]	228	5767054-6
2.000[50.8]	4	2.450[62.23]	2.900[73.66]	3.000[76.2]	190	5767054-5
1.500[38.1]	3	1.950[49.53]	2.400[60.96]	2.500[63.5]	152	5767054-4
1.000[25.4]	2	1.450[36.83]	1.900[48.26]	2.000[50.8]	114	5767054-3
.500[12.7]	1	.950[24.13]	1.400[35.56]	1.500[38.1]	76	5767054-2
.000[0]	0	.450[11.43]	.900[22.86]	1.000[25.4]	38	5767054-1
E	D	C	B	A	NO OF POS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A. FERNANDEZ	01 OCT 04	TE Connectivity	
DIMENSIONS: INCHES		CHK D. DIXON	01 OCT 04		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. DIXON	01 OCT 04	NAME	
0 PLC ± -		PRODUCT SPEC		RECEPTACLE ASSEMBLY, VERTICAL, .025[0.64]CL, GULL WING LEADS, MICTOR	
1 PLC ± -		108-1422		-	
2 PLC ± -		APPLICATION SPEC		SIZE	
3 PLC ± -.005[0.13]		114-11004		CAGE CODE	
4 PLC ± -		WEIGHT		DRAWING NO	
ANGLES ± -		A1		5767054	
FINISH		CUSTOMER DRAWING		RESTRICTED TO	
1		SCALE		1:1	
2		SHEET		1 OF 1	
		REV		A1	



Connectors > PCB Connectors > PCB Headers & Receptacles

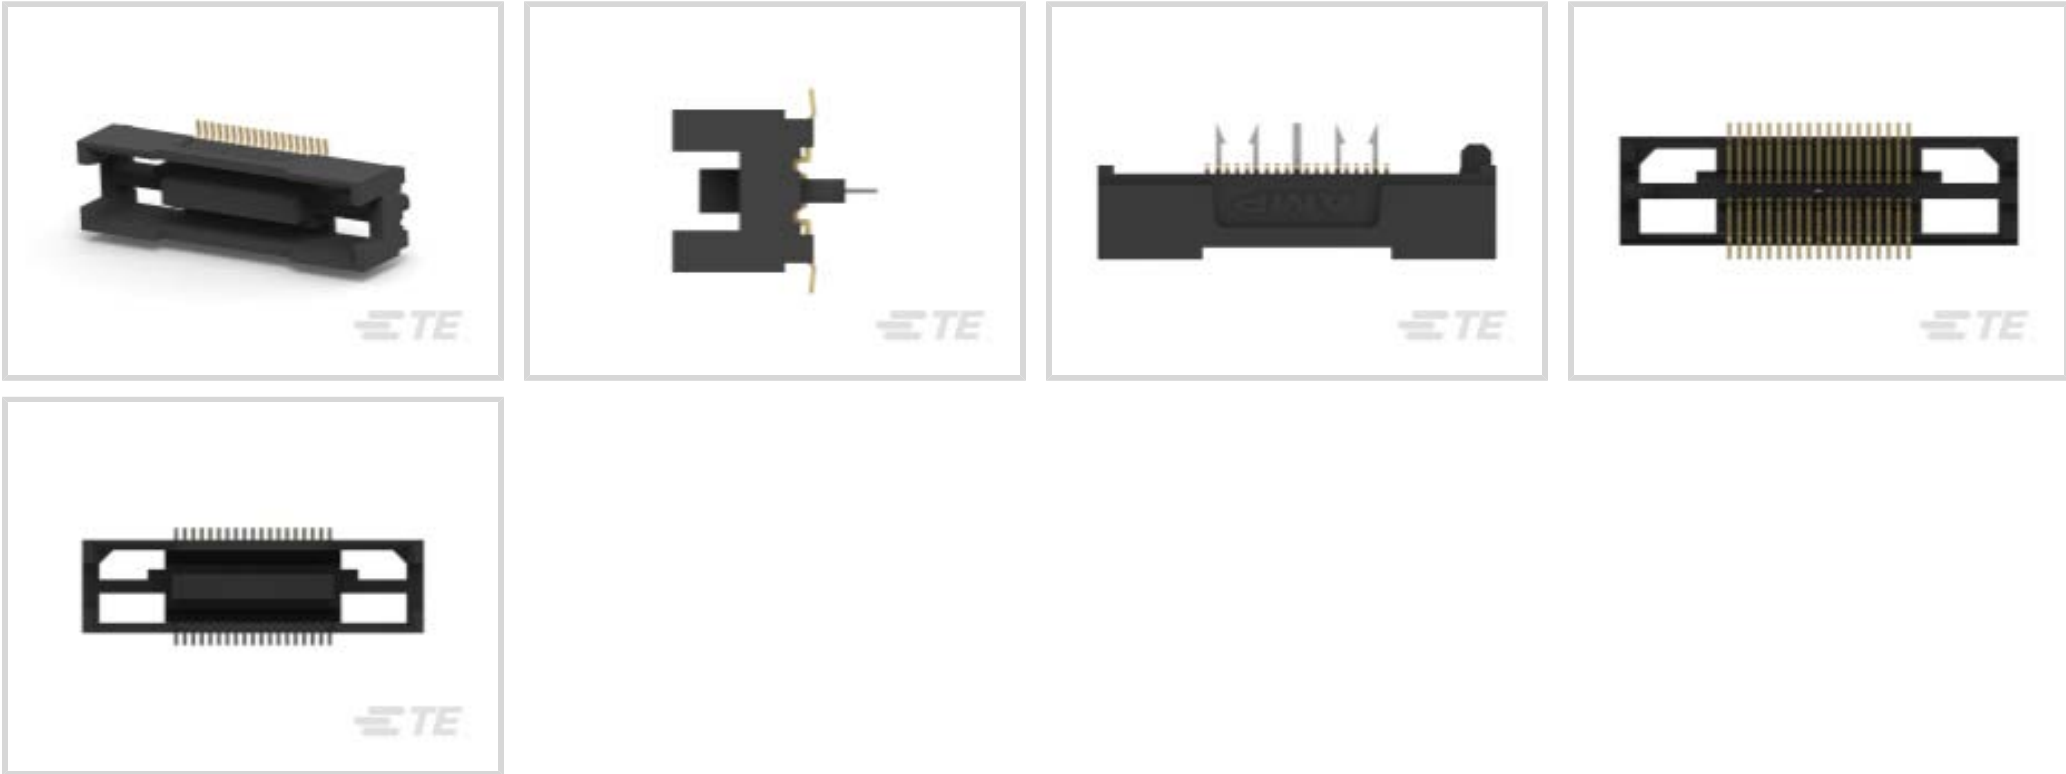

PCB Connector Assembly Type: **PCB Mount Receptacle**

PCB Mount Orientation: **Vertical**

Connector System: **Board-to-Board**

Number of Positions: **38**

Centerline (Pitch): **.64 mm [ .025 in ]**

Features

Product Type Features

Ground Feature Type	Ground Bus
PCB Connector Assembly Type	PCB Mount Receptacle
Connector System	Board-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Power Positions	1
Number of Columns	19
Stackable	Yes
Number of Signal Positions	38
PCB Mount Orientation	Vertical
Number of Positions	38
Board-to-Board Configuration	Parallel



Electrical Characteristics

Dielectric Withstanding Voltage (Max)	500 VAC
Insulation Resistance	2 MΩ
Impedance	50 Ω
Operating Voltage	30 VAC

Signal Characteristics

Differential Signaling	Yes
Data Rate	10 Gb/s

Body Features

Primary Product Color	Black
-----------------------	-------

Contact Features

Contact Mating Area Length	1.63 mm[.064 in]
PCB Contact Termination Area Plating Material Thickness	3.81 – 6.35 μm[149.9997 – 249.9995 μin]
Contact Layout	Inline
PCB Contact Termination Area Plating Material Finish	Matte
Contact Shape & Form	Dual Beam
Contact Mating Area Plating Material Finish	Matte
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Copper Alloy
Contact Mating Area Plating Material	Gold Flash over Palladium Nickel
Contact Mating Area Plating Material Thickness	.127 μm[4.99999 μin]
Contact Type	Socket
Contact Current Rating (Max)	11.5 A

Termination Features

Rectangular Termination Post & Tail Thickness	.2 mm[.008 in]
Rectangular Termination Post & Tail Width	.53 mm[.021 in]
Termination Method to Printed Circuit Board	Surface Mount

Mechanical Attachment

PCB Mount Alignment Type	Locating Posts
Mating Retention	With
Mating Alignment	With
PCB Mount Retention	With



PCB Mount Alignment	With
Connector Mounting Type	Board Mount

Housing Features

Mating Entry Location	Top
Centerline (Pitch)	.64 mm[.025 in]
Housing Material	Matte

Dimensions

Connector Length	25.4 mm[1 in]
Connector Height	5.99 mm[.236 in]
Connector Width	6.9 mm[.272 in]
Stack Height	6.6 mm, 9 mm, 10.92 mm, 12.57 mm, 17.96 mm, 18.75 mm, 20 mm, 22.86 mm[.9 in]
PCB Thickness (Recommended)	1.57 mm[.13 in]

Usage Conditions

Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Signal
---------------------	--------

Industry Standards

UL Rating	Listed
Agency/Standard	CSA, UL
Approved Standards	CSA 1195944, UL E28476
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	21
Packaging Type	Box, Tube

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235)













Candidate List Declared Against: JUNE 2023 (235)  
Does not contain REACH SVHC


Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Reflow solder capable to 260°C

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 <p>TE Part # 5767005-8 MICT,495PLUG,038,ASSY,.025,REC</p>	 <p>TE Part # 5767007-8 MICT,260PLUG,38,ASSY,.025,REC</p>	 <p>TE Part # 5767056-1 MICT,260,PLUG,38,ASSY,PDNI</p>	 <p>TE Part # 5767006-1 MICT,R/APLUG,38,ASSY,.025,.062</p>
 <p>TE Part # 5767017-1 MICT,900PLUG,38,ASSY,.025,REC</p>	 <p>TE Part # 5767111-8 MICT,PLG,038,ASY,.025 TAPE CAP</p>	 <p>TE Part # 5767055-1 MICT,R/APLUG,ASSY,38,PDNI</p>	 <p>TE Part # 5767025-1 MICTOR .707 PLUG ASSY, 38 POS.</p>

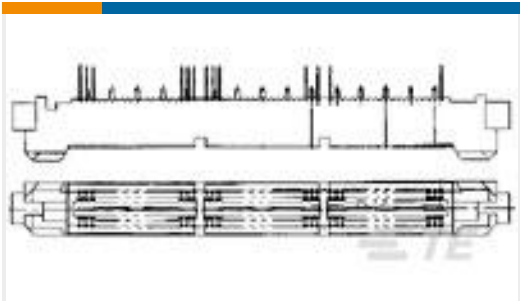


TE Part # 5767032-1  
MICT,788PLUG,38,ASSY,.025,REC

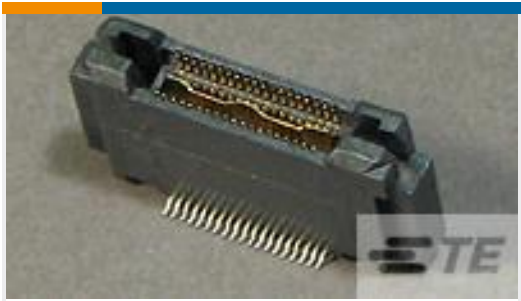

TE Part # 5767057-1  
MICT,495,PLUG,038,PDNI




TE Part # 5767082-1  
MICT,495,PLUG,038,PDNI,BARBLES

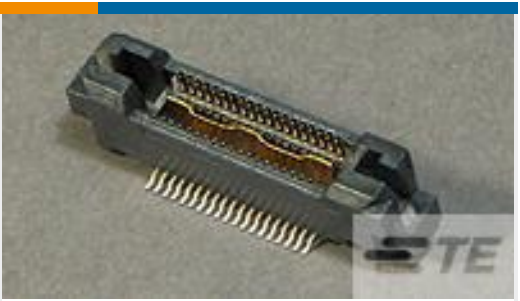

TE Part # 5767117-1  
MICT,260,PLG,038,ASY,.025,PDNI



TE Part # 5767118-8  
MICT,PLG,038,ASY,.025,TAPE PKG

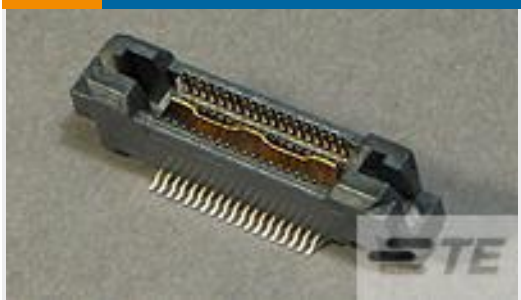

TE Part # 5767119-1  
MICT,PLG,038,ASY,.025,TAPE PKG



TE Part # 5767119-8  
MICT,PLG,038,ASY,.025,TAPE PKG



TE Part # 5767121-8  
MICT,PLG,038,ASY,.025,TAPE PKG



TE Part # 5767149-1  
MICTOR PLUG ASSY IN TAPE & REE



TE Part # 5767149-8  
MICTOR PLUG ASSY IN TAPE & REE

TE Part # 2007649-1  
MICT,SMT,260,PLUG,38,ASSY,PDNI

Customers Also Bought




TE Part #1-179959-2  
DYNAMIC D-5200 HDR ASSY 6P H X




TE Part #T1500063000-000  
H6B-AG




TE Part #5536446-5  
ASSEMBLY,RECEPTACLE,EUROCARD, T

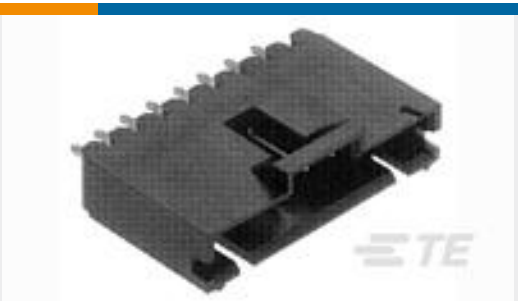

TE Part #103735-7  
08 MTE HDR SRST LATCH .100CL

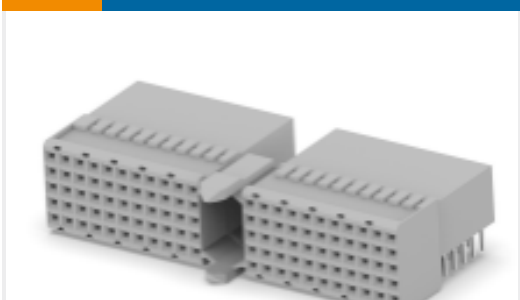

TE Part #3-5100147-0  
Z-PACK,TYPE A, RA REC.110P



TE Part #3-5352068-0  
Z-PACK/A RAF 110P



TE Part #400123-000  
201M120-19B

勝特力電材超市-龍山店 886-3-5773766  
勝特力電材超市-光復店 886-3-5729570  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
<http://www.100y.com.tw>

Documents