


TJ-136A

size:1.36

unit:mm(inch)

TJ serie PCB Probe

Plunger Tips

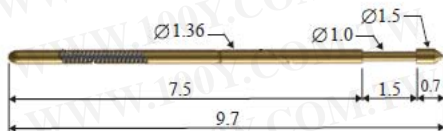


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

How to Order (continued)


TJ-136	A	02	A	100	055	A
Series	Size	Length Tip	Tip Plating	Outer	Spring Force	Tube Plating
			A:Gold			A:Gold
			★R.Rh			N:Nickel Silver

Timejet TR-136A


size:1.66
unit:mm(inch)



TR-136AW25C



TR-136AV25C



TR-136AV25S

How to Order (continued)

TR-136	A	W	25	C
Series	Size	Length	Style	Distance of Press-Ring
			V:V type I Ring	25±2.5
			W:Straight type I Rings	
				Terminal C:Crimp

Material Data

針軸 Plunger 高碳鋼鍍金 SK4 with Gold Plated
 內管 Barrel 磷青銅鍍金 Phosphor Bronze with Gold Plated
 彈簧 Spring 琴鋼線鍍金 Music Wire with Gold Plated
 外管 Receptacle 黃銅鍍金 Brass with Gold Plated

Electrical Data

最小中心距 Min. Center 2.54mm (0.100")
 建議鑽孔尺寸 Recommended Hole Size 1.7mm~1.75mm (0.0669"~0.0689")
 額定電流 Current Rating 3A(安培)
 接觸電阻 Contact Resistance 30mΩ(毫歐姆)

Mechanical Data

工作行程 Working Stroke 1.0mm (0.0393")
 最大行程 Maximum Stroke 1.5mm (0.0590")
 工作行程彈力 Spring Force at Working Stroke 55g