



# Capsuline

Capsuline 20W G4 12V CL 4000h 1CT

Single-ended low-voltage halogen capsule giving crisp white halogen light. Compact shape, crisp white light. Low-voltage halogen capsule. Ideal solution for small decorative luminaires. UV-block glass and low-pressure filling allow usage without cover glass. The compact Capsuline delivers crisp white light over a long lifetime.

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## Product data

### • General Characteristics

Philips Code	13078
Cap-Base	G4
Cap-Base Information	na [-]
Bulb	T3 [T3: .354 inch / 9 mm]
Bulb Finish	Clear
Operating Position	any [Any or Universal (U)]
Nominal Lifetime	4000 hr
Rated Lifetime (hours)	4000 hr
Rated Lifetime (years)	4 an

### • Light Technical Characteristics

Color Rendering Index	100 Ra8
Color Temperature	3000 K
Color Temperature Technical	3000 K
Luminous flux lamp	310 Lm
Rated Luminous Flux	310 Lm
Luminous Efficacy Lamp	15.5 Lm/W
LLMF - end nominal lifetime	80 (min) %

### • Electrical Characteristics

Rated Wattage	20.0 W
Lamp Wattage	20 W
Lamp Wattage Technical	20.0 W
Power Factor	1 -
Voltage	12 V
Lamp Current	1.67 A
Dimmable	Yes

Starting Time	0.0 s
Warm-up Time to 60% Light Outp	instant full light

### • Environmental Characteristics

Energy Efficiency Label (EEL)	C
Energy consumption kWh/1000h	21 kWh

### • Measuring Conditions

Switching cycle	16000X
-----------------	--------

### • Luminaire Design Requirements

Pinch Temperature	350 (max) C
Bulb Temperature	900 (max) C

### • Product Dimensions

Overall Length C	33 (max) mm
Diameter D	9 (max) mm
Light Center Length L	22 mm

### • Product Data

Order code	924036417102
Full product code	924036417102
Full product name	Capsuline 20W G4 12V CL 4000h 1CT
Order product name	Caps 20W G4 12V CL 4000h 1CT
Pieces per pack	1
Packing configuration	10X10F
Packs per outerbox	100



**PHILIPS**

# Capsuleline

Bar code on pack - EAN1 8711500402103  
Bar code on intermediate packing - EAN2 8711500416711  
Bar code on outerbox - EAN3 8711500425652

Logistic code(s) - 924036417102  
12NC  
ILCOS code HSG/C/UB-20-12-G4  
Net weight per piece 1.810 gr

## Dimensional drawing

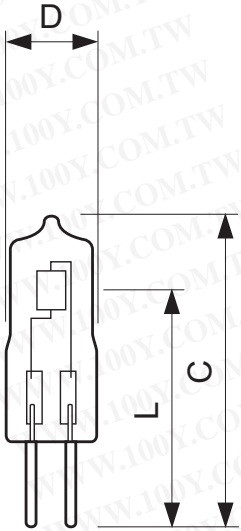

G4

## Capsuleline 20W G4 12V CL 4000h 1CT

Product	C (Max)	D (Max)	L (Norm)
CAP SU 13078 20W G4 12V CL	33	9	22

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)



© 2015 Koninklijke Philips N.V. (Royal Philips)  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2015, January 21  
data subject to change