

Capsuline

Capsuline 35W GY6.35 12V CL 4000h 1CT



Single-ended low-voltage halogen capsule giving crisp white halogen light. Compact shape, crisp white light. Low-voltage halogen capsule. Ideal solution for small decorative luminaires. UV-block glass and low-pressure filling allow usage without cover glass. The compact Capsuline delivers crisp white light over a long lifetime.

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Product data

• General Characteristics

Philips Code	13103
Cap-Base	GY6.35
Cap-Base Information	15
Bulb	T4 [T4: .434 inch / 11mm]
Bulb Finish	Clear
Operating Position	any [Any or Universal (U)]
Nominal Lifetime	4000 hr
Rated Lifetime (hours)	4000 hr
Rated Lifetime (years)	4 an

Starting Time	0.0 s
Warm-up Time to 60% Light Outp	instant full light

• Environmental Characteristics

Energy Efficiency Label (EEL)	C
Energy consumption kWh/1000h	37 kWh

• Measuring Conditions

Switching cycle	16000X
-----------------	--------

• Luminaire Design Requirements

Pinch Temperature	350 (max) C
Bulb Temperature	900 (max) C

• Product Dimensions

Overall Length C	44 (max) mm
Diameter D	12 (max) mm
Light Center Length L	30 mm

• Product Data

Order code	924040317101
Full product code	924040317101
Full product name	Capsuline 35W GY6.35 12V CL 4000h 1CT
Order product name	Caps 35W GY6.35 12V CL 4000h 1CT/10X10F
Pieces per pack	1
Packing configuration	10X10F

• Light Technical Characteristics

Color Rendering Index	100 Ra8
Color Temperature	3000 K
Color Temperature Technical	3000 K
Luminous flux lamp	600 Lm
Rated Luminous Flux	600 Lm
Luminous Efficacy Lamp	17 Lm/W
LLMF - end nominal lifetime	80 (min) %

• Electrical Characteristics

Rated Wattage	35.0 W
Lamp Wattage	35 W
Lamp Wattage Technical	35 W
Power Factor	1 -
Voltage	12 V
Lamp Current	2.95 A
Dimmable	Yes



PHILIPS

Capsuline

Packs per outerbox 100
Bar code on pack - EAN1 8711500402189
Bar code on intermediate packing - EAN2 8711500416957

Bar code on outerbox - EAN3 8711500425775
Logistic code(s) - 12NC 924040317101
ILCOS code HSG/C/UB-35-12-GY6.35
Net weight per piece 2.300 gr

Dimensional drawing

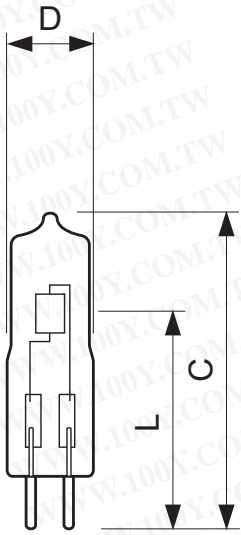

GY6.35

Capsuline 35W GY6.35 12V CL 4000h 1CT

Product	C (Max)	D (Max)	L (Norm)
CAP SU 13103 35W GY6.35 12V CL	44	12	30

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



© 2015 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, June 1
data subject to change