


Features

Printed circuit mount 2 A signal relay



- 2 Pole changeover contacts
- Low level switching capability
- Subminiature - industry standard DIL package
- Sensitive DC coil - 200 mW
- Wash tight: RT III
- Cadmium Free contact material



30.22



- Low coil power
- Au clad contacts
- PCB mount




Copper side view

Contact specification	
Contact configuration	2 CO (DPDT)
Rated current/Maximum peak current	A 2/3
Rated voltage/Maximum switching voltage	V AC 125/250
Rated load AC1	VA 125
Rated load AC15 (230 V AC)	VA 25
Single phase motor rating (230 V AC)	kW —
Breaking capacity DC1: 30/110/220 V	A 2/0.3/—
Minimum switching load	mW (V/mA) 10 (0.1/1)
Standard contact material	AgNi + Au
Coil specification	
Nominal voltage (U _N)	V AC (50/60 Hz) —
	V DC 5 - 6 - 9 - 12 - 24 - 48
Rated power AC/DC	VA (50 Hz)/W —/0.2
Operating range	AC —
	DC See table page 3
Holding voltage	AC/DC —/0.35 U _N
Must drop-out voltage	AC/DC —/0.05 U _N
Technical data	
Mechanical life AC/DC	cycles —/10 · 10 ⁶
Electrical life at rated load AC1	cycles 100 · 10 ³
Operate/release time	ms 6/2
Insulation between coil and contacts (1.2/50 μs)	kV 1.5
Dielectric strength between open contacts	V AC 750
Ambient temperature range	°C —40...+85
Environmental protection	RT III
Approvals (according to type)	

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Ordering information

Example: 30 series PCB relay, 2 CO (DPDT) - 2 A contacts, 12 V sensitive DC coil.

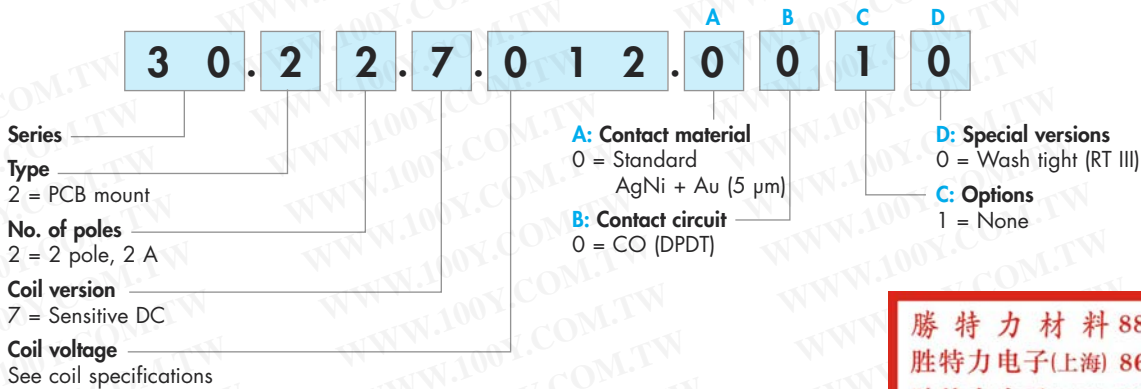


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Technical data

Insulation according to EN 61810-1			
Nominal voltage of supply system	V AC	230/400	120...240 single phase
Rated insulation voltage	V AC	250	125
Pollution degree		1	2
Insulation between coil and contact set			
Type of insulation		Basic	Basic
Overvoltage category		I	II
Rated impulse voltage	kV (1.2/50 µs)	1.5	1.5
Dielectric strength	V AC	1,000	1,000
Insulation between adjacent contacts			
Type of insulation		Basic	Basic
Overvoltage category		I	II
Rated impulse voltage	kV (1.2/50 µs)	1.5	1.5
Dielectric strength	V AC	1,500	1,500
Insulation between open contacts			
Type of disconnection		Micro-disconnection	Micro-disconnection
Dielectric strength	V AC/kV (1.2/50 µs)	750/1	750/1
Other data			
Bounce time: NO/NC	ms	1/3	
Vibration resistance (5...55)Hz: NO/NC	g	15/15	
Shock resistance	g	16	
Power lost to the environment	without contact current	W	0.2
	with rated current	W	0.4
Recommended distance between relays mounted on PCB	mm	≥ 5	

Contact specification

F 30 - Electrical life (AC1) v contact current (125 V)

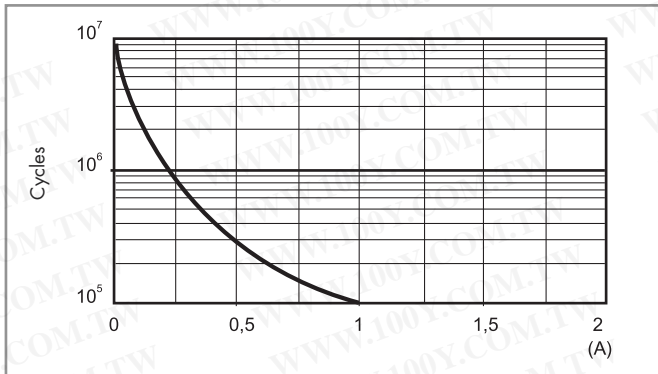

Note:
The rated current of 2 A corresponds to the limiting continuous current.


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Coil specifications

DC coil data - 0.2 W sensitive

Nominal voltage U_N V	Coil code	Operating range		Resistance R Ω	Rated coil consumption I at U_N mA
		U_{min} V	U_{max} V		
5	7.005	3.7	7.5	125	40
6	7.006	4.5	9	180	33
9	7.009	6.7	13.5	405	22
12	7.012	8.4	18	720	16
24	7.024	16.8	36	2,880	8.3
48	7.048	36	72	11,520	4.1

R 30 - DC coil operating range v ambient temperature

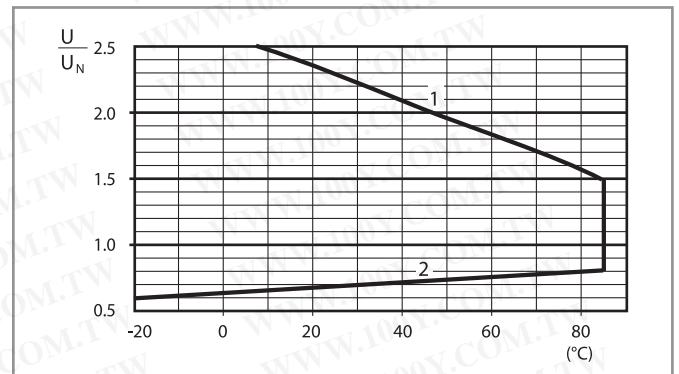

1 - Max. permitted coil voltage.
 2 - Min. pick-up voltage with coil at ambient temperature.