

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


PD - 95635

International **IR** Rectifier

IRLI530NPbF

HEXFET® Power MOSFET


- Logic-Level Gate Drive
- Advanced Process Technology
- Isolated Package
- High Voltage Isolation = 2.5KVRMS ⑤
- Sink to Lead Creepage Dist. = 4.8mm
- Fully Avalanche Rated
- Lead-Free



| |
|---------------------------|
| $V_{DSS} = 100V$ |
| $R_{DS(on)} = 0.10\Omega$ |
| $I_D = 12A$ |

Description

Fifth Generation HEXFETs from International Rectifier utilize advanced processing techniques to achieve extremely low on-resistance per silicon area. This benefit, combined with the fast switching speed and ruggedized device design that HEXFET Power MOSFETs are well known for, provides the designer with an extremely efficient and reliable device for use in a wide variety of applications.



The TO-220 Fullpak eliminates the need for additional insulating hardware in commercial-industrial applications. The moulding compound used provides a high isolation capability and a low thermal resistance between the tab and external heatsink. This isolation is equivalent to using a 100 micron mica barrier with standard TO-220 product. The Fullpak is mounted to a heatsink using a single clip or by a single screw fixing.

Absolute Maximum Ratings

| | Parameter | Max. | Units |
|---------------------------|--|--------------------|-------|
| $I_D @ T_C = 25^\circ C$ | Continuous Drain Current, $V_{GS} @ 10V$ | 12 | A |
| $I_D @ T_C = 100^\circ C$ | Continuous Drain Current, $V_{GS} @ 10V$ | 8.6 | |
| I_{DM} | Pulsed Drain Current ①⑥ | 60 | |
| $P_D @ T_C = 25^\circ C$ | Power Dissipation | 41 | W |
| | Linear Derating Factor | 0.27 | W/°C |
| V_{GS} | Gate-to-Source Voltage | ± 16 | V |
| E_{AS} | Single Pulse Avalanche Energy②⑥ | 150 | mJ |
| I_{AR} | Avalanche Current①⑥ | 9.0 | A |
| E_{AR} | Repetitive Avalanche Energy① | 4.1 | mJ |
| dv/dt | Peak Diode Recovery dv/dt ③⑥ | 5.0 | V/ns |
| T_J | Operating Junction and Storage Temperature Range | -55 to + 175 | °C |
| T_{STG} | | | |
| | | | |
| | Mounting torque, 6-32 or M3 screw | 10 lbf•in (1.1N•m) | |

Thermal Resistance

| | Parameter | Typ. | Max. | Units |
|-----------------|---------------------|------|------|-------|
| $R_{\theta JC}$ | Junction-to-Case | --- | 3.7 | °C/W |
| $R_{\theta JA}$ | Junction-to-Ambient | --- | 65 | |

www.irf.com

1


07/23/04

IRLI530NPbF

International
IRF Rectifier

Electrical Characteristics @ T_J = 25°C (unless otherwise specified)

| | Parameter | Min. | Typ. | Max. | Units | Conditions |
|--------------------------------------|--------------------------------------|------|-------|-------|---|---|
| V _{(BR)DSS} | Drain-to-Source Breakdown Voltage | 100 | — | — | V | V _{GS} = 0V, I _D = 250μA |
| ΔV _{(BR)DSS/ΔT_J} | Breakdown Voltage Temp. Coefficient | — | 0.122 | — | V/°C | Reference to 25°C, I _D = 1mA⑥ |
| R _{DS(on)} | Static Drain-to-Source On-Resistance | — | — | 0.100 | Ω | V _{GS} = 10V, I _D = 9.0A ④ |
| | | — | — | 0.120 | | V _{GS} = 5.0V, I _D = 9.0A ④ |
| | | — | — | 0.150 | | V _{GS} = 4.0V, I _D = 8.0A ④ |
| V _{GS(th)} | Gate Threshold Voltage | 1.0 | — | 2.0 | V | V _{DS} = V _{GS} , I _D = 250μA |
| g _{fs} | Forward Transconductance | 7.7 | — | — | S | V _{DS} = 50V, I _D = 9.0A⑥ |
| I _{DSS} | Drain-to-Source Leakage Current | — | — | 25 | μA | V _{DS} = 100V, V _{GS} = 0V |
| | | — | — | 250 | | V _{DS} = 80V, V _{GS} = 0V, T _J = 150°C |
| I _{GSS} | Gate-to-Source Forward Leakage | — | — | 100 | nA | V _{GS} = 16V |
| | Gate-to-Source Reverse Leakage | — | — | -100 | | V _{GS} = -16V |
| Q _g | Total Gate Charge | — | — | 34 | nC | I _D = 9.0A |
| Q _{gs} | Gate-to-Source Charge | — | — | 4.8 | | V _{DS} = 80V |
| Q _{gd} | Gate-to-Drain ("Miller") Charge | — | — | 20 | | V _{GS} = 5.0V, See Fig. 6 and 13 ④⑥ |
| t _{d(on)} | Turn-On Delay Time | — | 7.2 | — | | ns |
| t _r | Rise Time | — | 53 | — | I _D = 9.0A | |
| t _{d(off)} | Turn-Off Delay Time | — | 30 | — | R _G = 6.0Ω, V _{GS} = 5.0V | |
| t _f | Fall Time | — | 26 | — | R _D = 5.5Ω, See Fig. 10 ④⑥ | |
| L _D | Internal Drain Inductance | — | 4.5 | — | nH | Between lead, 6mm (0.25in.) from package and center of die contact |
| L _S | Internal Source Inductance | — | 7.5 | — | | |
| C _{iss} | Input Capacitance | — | 800 | — | pF | V _{GS} = 0V |
| C _{oss} | Output Capacitance | — | 160 | — | | V _{DS} = 25V |
| C _{rss} | Reverse Transfer Capacitance | — | 90 | — | | f = 1.0MHz, See Fig. 5⑥ |
| C | Drain to Sink Capacitance | — | 12 | — | | f = 1.0MHz |



Source-Drain Ratings and Characteristics

| | Parameter | Min. | Typ. | Max. | Units | Conditions |
|-----------------|---|--|------|------|-------|---|
| I _S | Continuous Source Current (Body Diode) | — | — | 12 | A | MOSFET symbol showing the integral reverse p-n junction diode. |
| I _{SM} | Pulsed Source Current (Body Diode) ①⑥ | — | — | 60 | | |
| V _{SD} | Diode Forward Voltage | — | — | 1.3 | V | T _J = 25°C, I _S = 6.6A, V _{GS} = 0V ④ |
| t _{rr} | Reverse Recovery Time | — | 140 | 210 | ns | T _J = 25°C, I _F = 9.0A |
| Q _{rr} | Reverse Recovery Charge | — | 740 | 1100 | nC | di/dt = 100A/μs ④⑥ |
| t _{on} | Forward Turn-On Time | Intrinsic turn-on time is negligible (turn-on is dominated by L _S +L _D) | | | | |

Notes:

- ① Repetitive rating; pulse width limited by max. junction temperature. (See fig. 11)
- ② Starting T_J = 25°C, L = 3.1mH
R_G = 25Ω, I_{AS} = 9.0A. (See Figure 12)
- ③ I_{SD} ≤ 9.0A, di/dt ≤ 540A/μs, V_{DD} ≤ V_{(BR)DSS},
T_J ≤ 175°C
- ④ Pulse width ≤ 300μs; duty cycle ≤ 2%.
- ⑤ t=60s, f=60Hz
- ⑥ Uses IRL530N data and test conditions

IRLI530NPbF

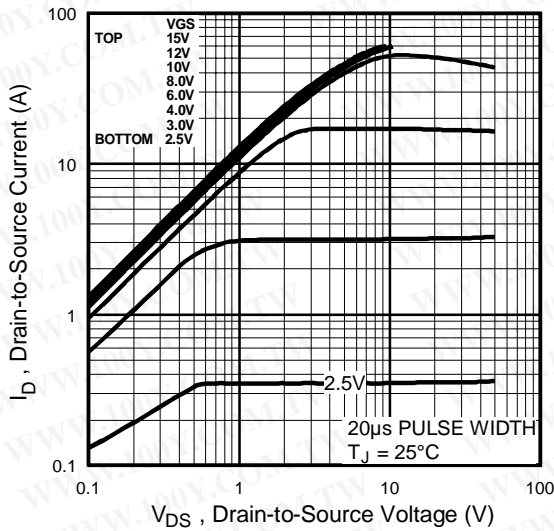


Fig 1. Typical Output Characteristics,

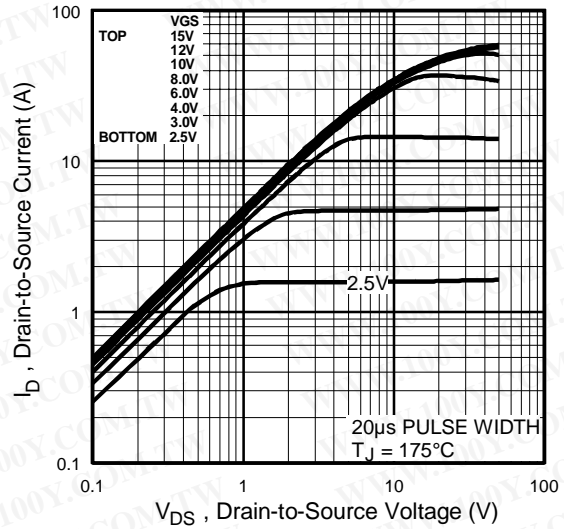


Fig 2. Typical Output Characteristics,

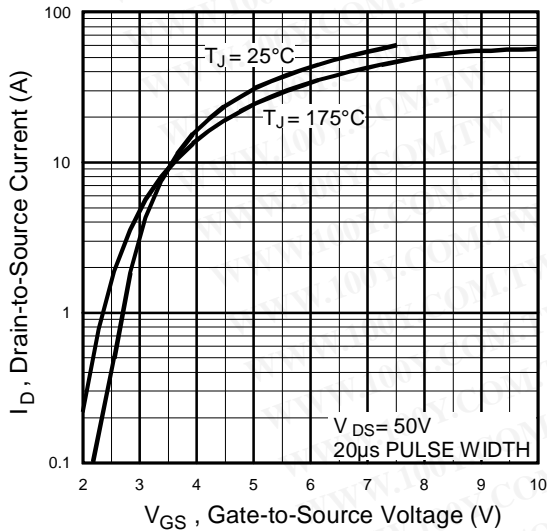


Fig 3. Typical Transfer Characteristics

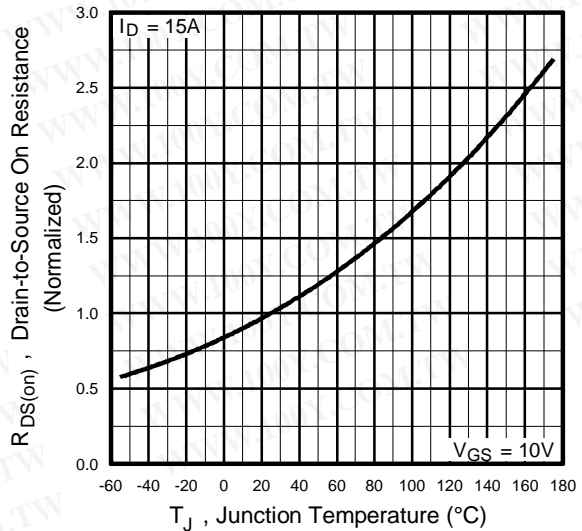


Fig 4. Normalized On-Resistance Vs. Temperature

IRLI530NPbF

International
IR Rectifier

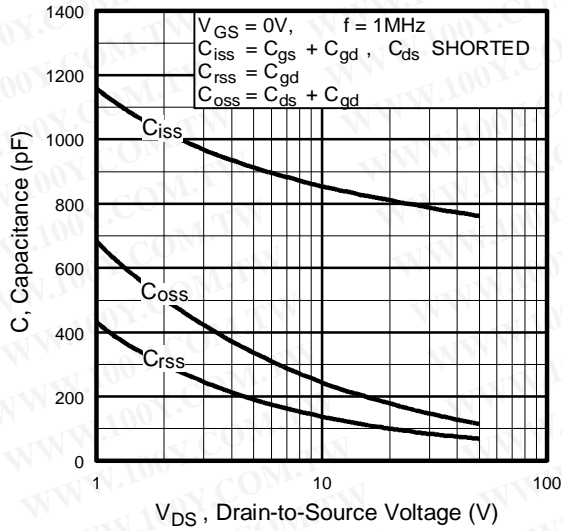


Fig 5. Typical Capacitance Vs. Drain-to-Source Voltage

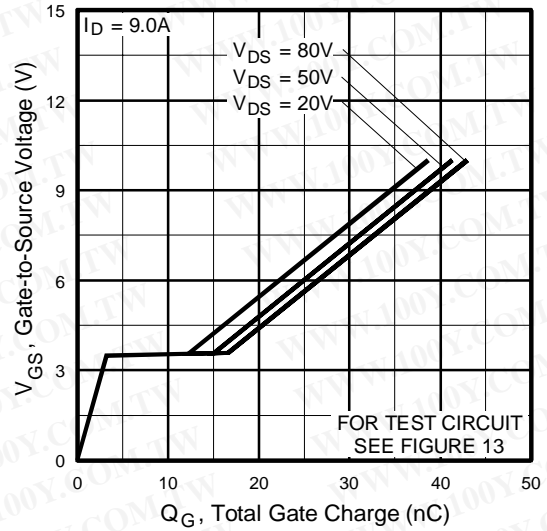


Fig 6. Typical Gate Charge Vs. Gate-to-Source Voltage

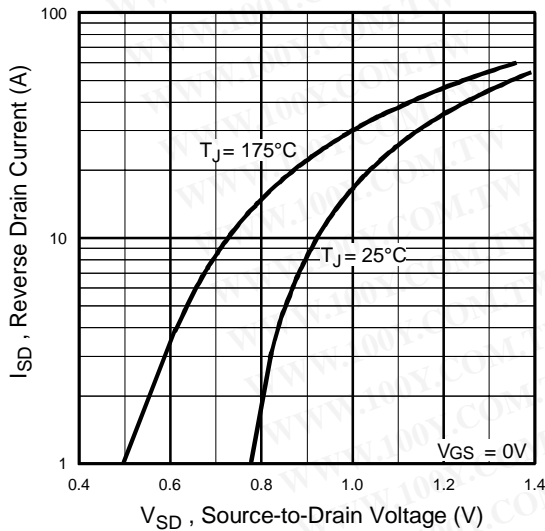


Fig 7. Typical Source-Drain Diode Forward Voltage

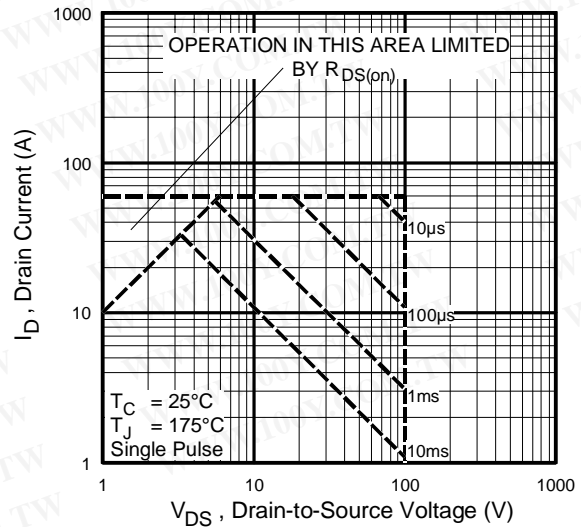


Fig 8. Maximum Safe Operating Area

International
IR Rectifier

IRLI530NPbF

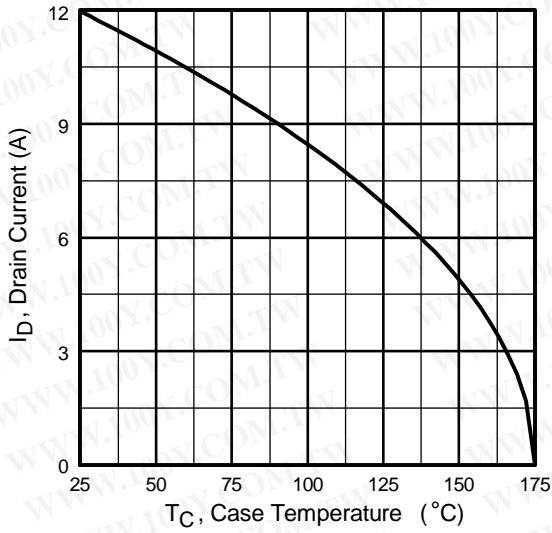


Fig 9. Maximum Drain Current Vs. Case Temperature

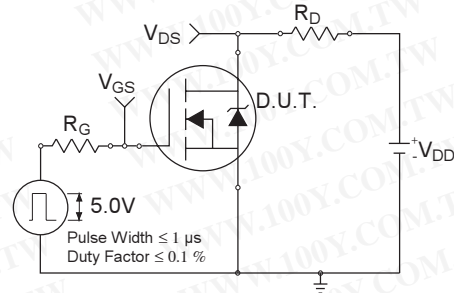


Fig 10a. Switching Time Test Circuit

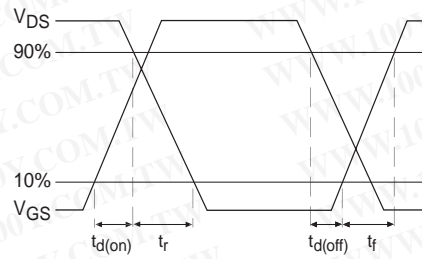


Fig 10b. Switching Time Waveforms

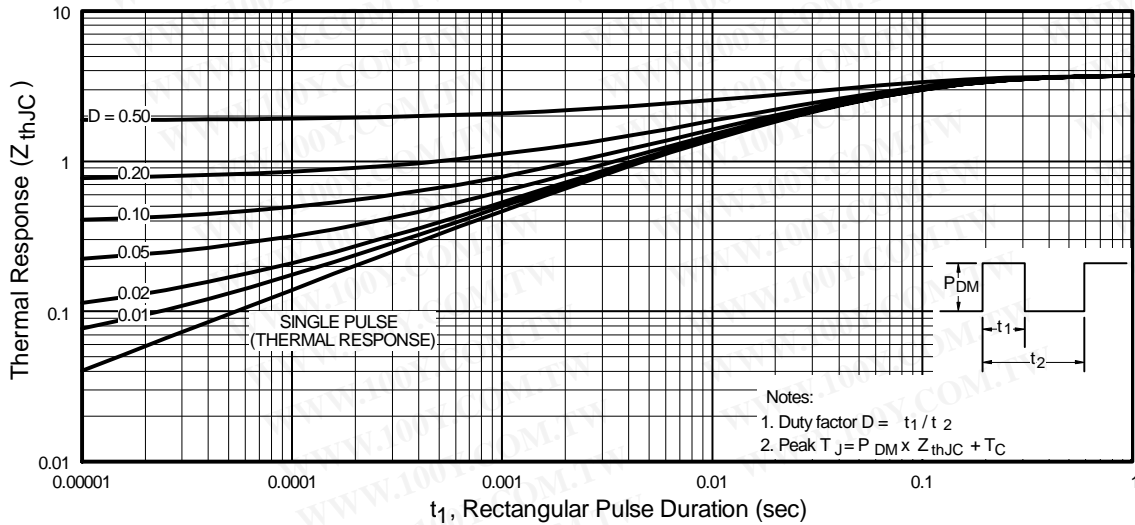


Fig 11. Maximum Effective Transient Thermal Impedance, Junction-to-Case

IRLI530NPbF

International
IR Rectifier

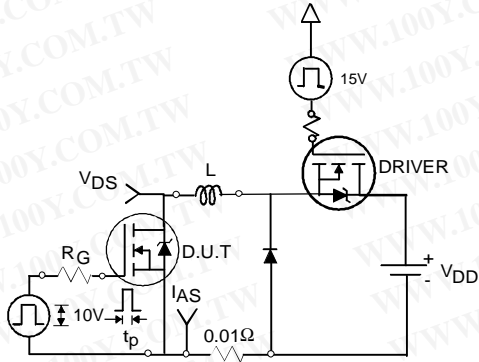


Fig 12a. Unclamped Inductive Test Circuit

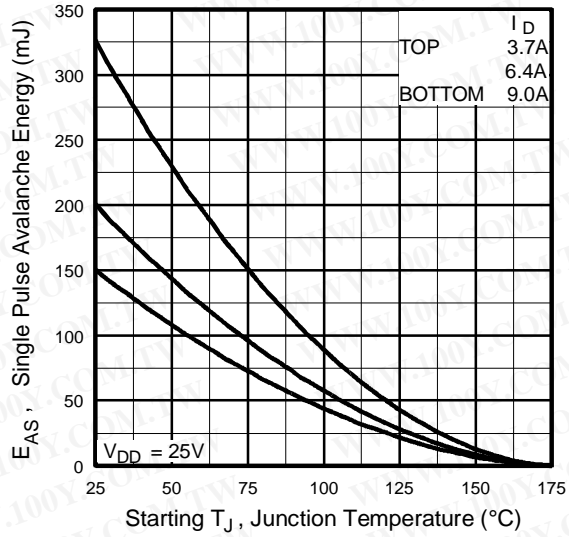


Fig 12c. Maximum Avalanche Energy Vs. Drain Current

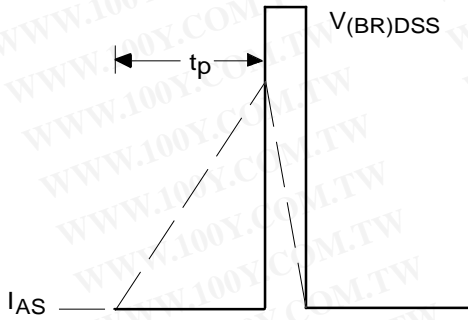


Fig 12b. Unclamped Inductive Waveforms

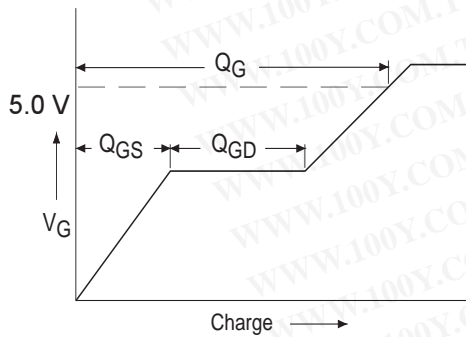


Fig 13a. Basic Gate Charge Waveform



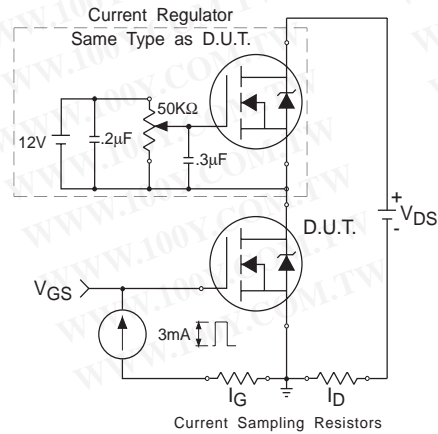


Fig 13b. Gate Charge Test Circuit

Peak Diode Recovery dv/dt Test Circuit

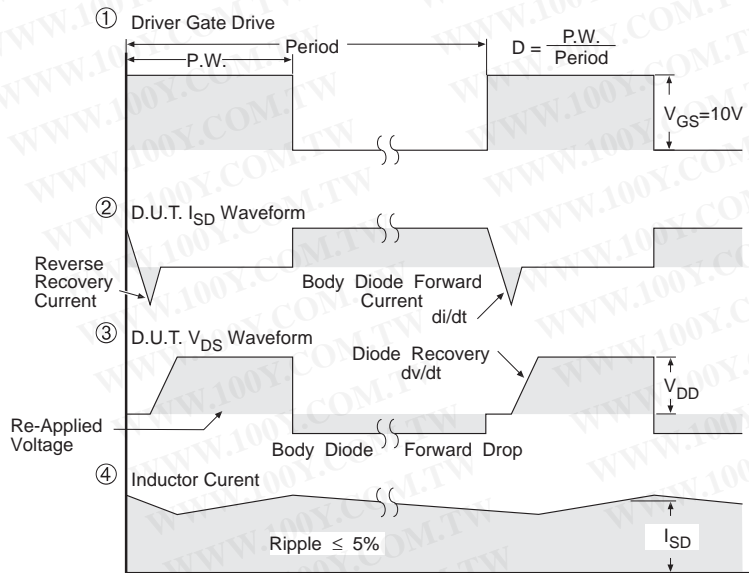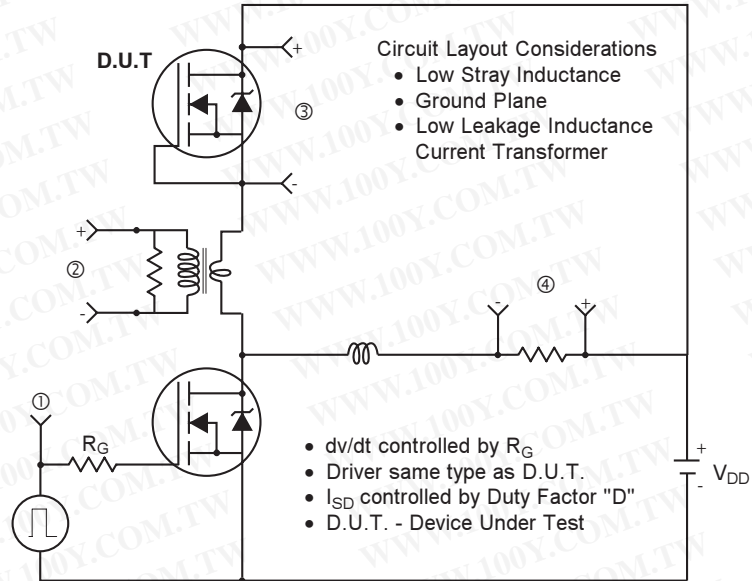

* $V_{GS} = 5V$ for Logic Level Devices

Fig 14. For N-Channel HEXFETS


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
 Http://www.100y.com.tw

IRLI530NPbF

TO-220 Full-Pak Package Outline

International
IR Rectifier

Dimensions are shown in millimeters (inches)

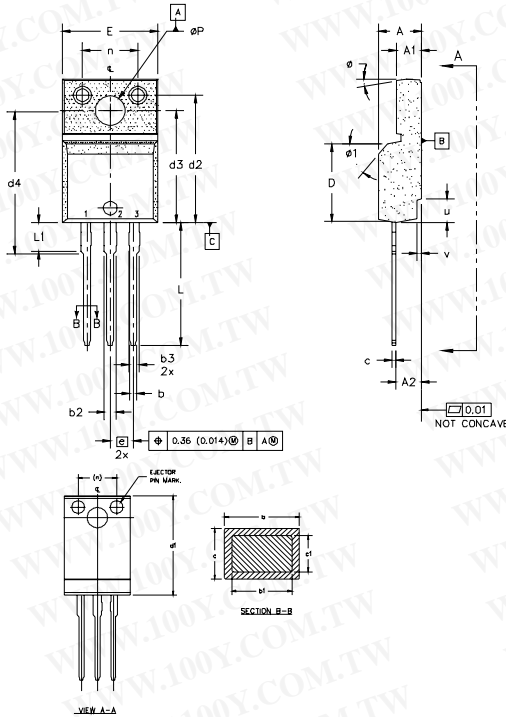

- NOTES:
- 1.0 DIMENSIONING AND TOLERANCING PER ASME Y14.5 M-1994.
 - 2.0 DIMENSIONS ARE SHOWN IN MILLIMETERS [INCHES].
 - 3.0 LEAD DIMENSION AND FINISH UNCONTROLLED IN L1.
 - 4.0 DIMENSION D & E DO NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED 0.005" (0.127) PER SIDE. THESE DIMENSIONS ARE MEASURED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY.
 - 5.0 DIMENSION b1 APPLY TO BASE METAL ONLY.
 - 6.0 STEP OPTIONAL ON PLASTIC BODY DEFINED BY DIMENSIONS u & v.
 - 7.0 CONTROLLING DIMENSION : INCHES.

| SYMBOL | MILLIMETERS | | INCHES | | NOTES |
|--------|-------------|-------|-----------|-------|-------|
| | MIN. | MAX. | MIN. | MAX. | |
| A | 4.57 | 4.83 | 0.180 | 0.190 | |
| A1 | 2.57 | 2.83 | 0.101 | 0.114 | |
| A2 | 2.51 | 2.85 | 0.099 | 0.112 | |
| b | 0.622 | 0.89 | 0.024 | 0.035 | |
| b1 | 0.622 | 0.858 | 0.024 | 0.033 | 5 |
| b2 | 1.229 | 1.400 | 0.048 | 0.055 | |
| b3 | 1.229 | 1.400 | 0.048 | 0.055 | |
| c | 0.440 | 0.629 | 0.017 | 0.025 | |
| c1 | 0.440 | 0.584 | 0.017 | 0.023 | |
| D | 8.65 | 9.80 | 0.341 | 0.396 | 4 |
| d1 | 15.80 | 16.12 | 0.622 | 0.635 | |
| d2 | 13.97 | 14.22 | 0.550 | 0.560 | |
| d3 | 12.30 | 12.92 | 0.484 | 0.509 | |
| d4 | 8.64 | 9.91 | 0.340 | 0.390 | |
| E | 10.36 | 10.63 | 0.408 | 0.419 | 4 |
| e | 2.54 BSC | | 0.100 BSC | | |
| L | 13.20 | 13.73 | 0.520 | 0.541 | |
| L1 | 3.10 | 3.50 | 0.122 | 0.138 | |
| n | 6.05 | 6.15 | 0.238 | 0.242 | 3 |
| phi P | 3.05 | 3.45 | 0.120 | 0.136 | |
| u | 2.40 | 2.50 | 0.094 | 0.098 | 6 |
| v | 0.40 | 0.50 | 0.016 | 0.020 | 6 |
| phi 1 | 3° | 45° | 3° | 45° | |

LEAD ASSIGNMENTS

- HEXKEET
 1.- GATE
 2.- DRAIN
 3.- SOURCE


IRTS Co-PACK

- 1.- GATE
 2.- COLLECTOR
 3.- EMITTER

TO-220 Full-Pak Part Marking Information

EXAMPLE: THIS IS AN IRF1840G
 WITH ASSEMBLY
 LOT CODE 3432
 ASSEMBLED ON WW 24 1999
 IN THE ASSEMBLY LINE "K"

Note: "P" in assembly line position indicates "Lead-Free"

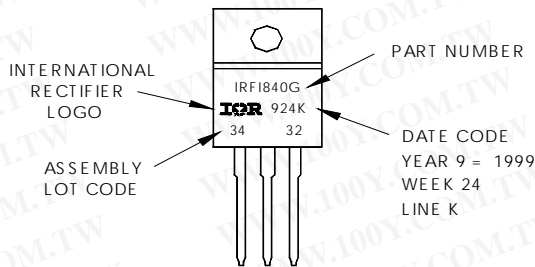

Data and specifications subject to change without notice.

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
 TAC Fax: (310) 252-7903

Visit us at www.irf.com for sales contact information. 07/04

www.irf.com