



Power Schottky Rectifier

$I_{FAV} = 2x60 \text{ A}$
 $V_{RRM} = 100 \text{ V}$
 $V_F = 0.73 \text{ V}$

V_{RSM} V	V_{RRM} V	Type
100	100	DSS 2x61-01A


miniBLOC, SOT-227 B


Symbol	Conditions	Maximum Ratings	
I_{FRMS}	$T_C = 105^\circ\text{C}$; rectangular, $d = 0.5$	100	A
I_{FAVM}		60	A
I_{FAVM}		$T_C = 105^\circ\text{C}$; rectangular, $d = 0.5$; per device	120
I_{FSM}	$T_{VJ} = 45^\circ\text{C}$; $t_p = 10 \text{ ms}$ (50 Hz), sine	700	A
E_{AS}	$I_{AS} = 12 \text{ A}$; $L = 180 \mu\text{H}$; $TVJ = 25^\circ\text{C}$; non repetitive	16	mJ
I_{AR}	$V_A = 1.5 \cdot V_{RRM}$ typ.; $f = 10 \text{ kHz}$; repetitive	1.2	A
$(dv/dt)_{cr}$		5000	V/ μs
T_{VJ}		-40...+150	$^\circ\text{C}$
T_{VJM}		150	$^\circ\text{C}$
T_{stg}		-40...+150	$^\circ\text{C}$
P_{tot}	$T_C = 25^\circ\text{C}$	150	W
V_{ISOL}	50/60 Hz, RMS $I_{ISOL} \leq 1 \text{ mA}$	2500	V~
M_d	mounting torque (M4)	1.1-1.5/9-13	Nm/lb.in.
	terminal connection torque (M4)	1.1-1.5/9-13	Nm/lb.in.
Weight	typical	30	g

Features

- International standard package miniBLOC
- Isolation voltage 2500 V~
- UL registered E 72873
- 2 independent Schottky diodes in 1 package
- Very low V_F
- Extremely low switching losses
- Low I_{RM} -values

Applications

- Rectifiers in switch mode power supplies (SMPS)
- Free wheeling diode in low voltage converters

Advantages

- High reliability circuit operation
- Low voltage peaks for reduced protection circuits
- Low noise switching
- Low losses

Dimensions see outlines.pdf

Symbol	Conditions	Characteristic Values	
		typ.	max.
I_R ①	$T_{VJ} = 25^\circ\text{C}$ $V_R = V_{RRM}$ $T_{VJ} = 125^\circ\text{C}$ $V_R = V_{RRM}$	2	mA
V_F	$I_F = 60 \text{ A}$; $T_{VJ} = 125^\circ\text{C}$ $I_F = 60 \text{ A}$; $T_{VJ} = 25^\circ\text{C}$ $I_F = 120 \text{ A}$; $T_{VJ} = 125^\circ\text{C}$	0.73	V
		0.86	V
		0.93	V
R_{thJC} R_{thCH}	0.1	0.8	K/W K/W

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Pulse test: ① Pulse Width = 5 ms, Duty Cycle < 2.0 %
Data according to IEC 60747 and per diode unless otherwise specified

IXYS reserves the right to change limits, Conditions and dimensions.

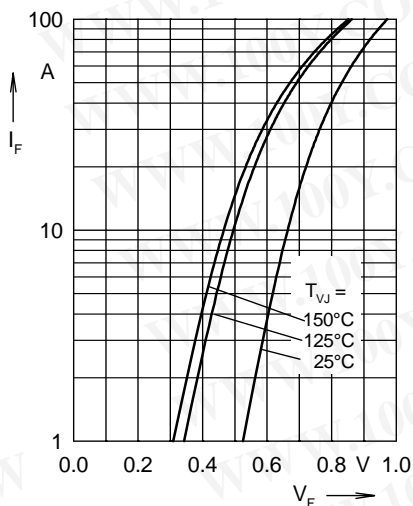


Fig. 1 Maximum forward voltage drop characteristics

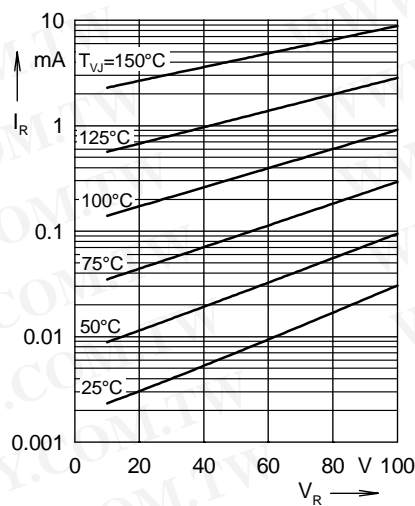


Fig. 2 Typ. value of reverse current I_R versus reverse voltage V_R

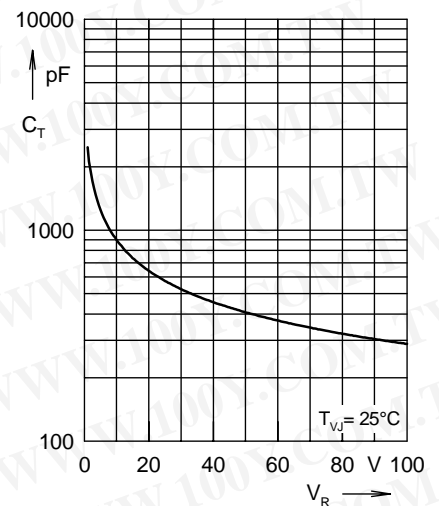


Fig. 3 Typ. junction capacitance C_T versus reverse voltage V_R

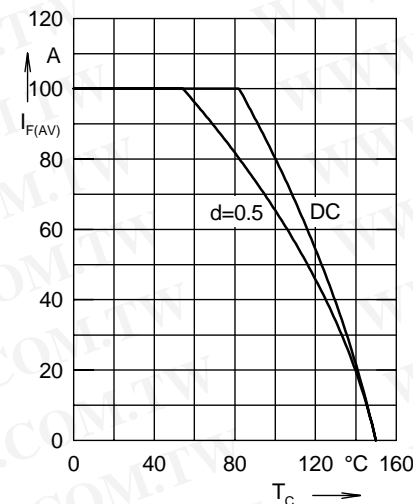


Fig. 4 Average forward current $I_{F(AV)}$ versus case temperature T_C

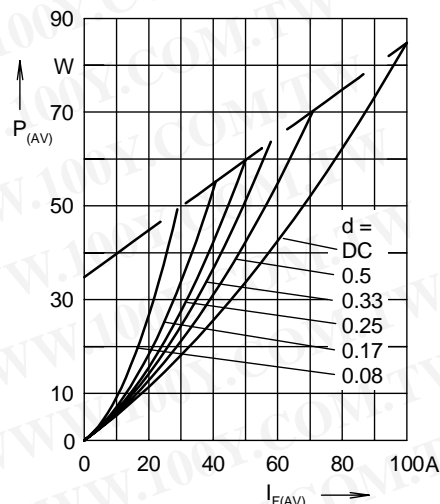


Fig. 5 Forward power loss characteristics

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

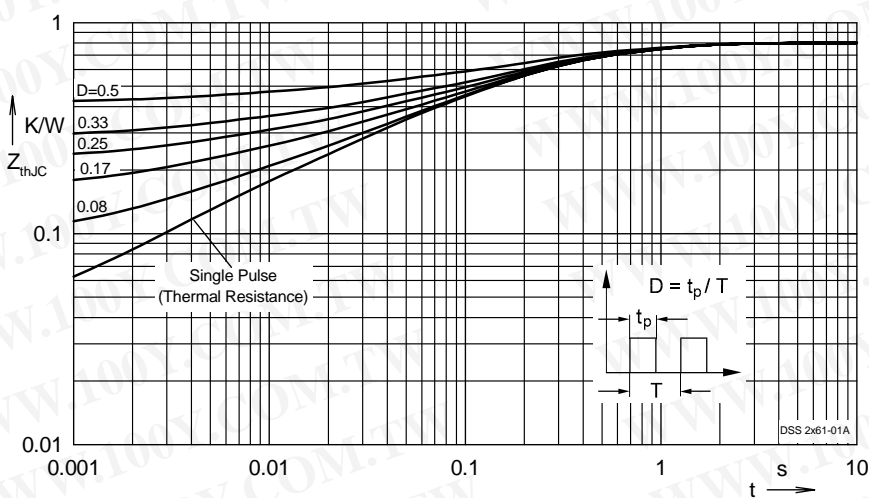


Fig. 6 Transient thermal impedance junction to case at various duty cycles

Note: All curves are per diode