

# MJL21193, MJL21194

Preferred Device

## Silicon Power Transistors

The MJL21193 and MJL21194 utilize Perforated Emitter technology and are specifically designed for high power audio output, disk head positioners and linear applications.

### Features

- Total Harmonic Distortion Characterized
- High DC Current Gain –  

$$h_{FE} = 25 \text{ Min @ } I_C$$

$$= 8 \text{ Adc}$$
- Excellent Gain Linearity
- High SOA: 2.25 A, 80 V, 1 Second
- Pb-Free Packages are Available\*

### MAXIMUM RATINGS

| Rating  | Symbol         | Value          | Unit                     |
|---|----------------|----------------|--------------------------|
| Collector-Emitter Voltage   | $V_{CEO}$      | 250            | Vdc                      |
| Collector-Base Voltage  | $V_{CBO}$      | 400            | Vdc                      |
| Emitter-Base Voltage  | $V_{EBO}$      | 5              | Vdc                      |
| Collector-Emitter Voltage – 1.5 V   | $V_{CEX}$      | 400            | Vdc                      |
| Collector Current – Continuous<br>Peak (Note 1)                                       | $I_C$          | 16<br>30       | Adc                      |
| Base Current – Continuous   | $I_B$          | 5              | Adc                      |
| Total Power Dissipation @ $T_C = 25^\circ\text{C}$<br>Derate above $25^\circ\text{C}$ | $P_D$          | 200<br>1.43    | W<br>W/ $^\circ\text{C}$ |
| Operating and Storage Junction<br>Temperature Range                                   | $T_J, T_{stg}$ | -65 to<br>+150 | $^\circ\text{C}$         |

### THERMAL CHARACTERISTICS

| Characteristic                       | Symbol          | Max | Unit               |
|--------------------------------------|-----------------|-----|--------------------|
| Thermal Resistance, Junction-to-Case | $R_{\theta JC}$ | 0.7 | $^\circ\text{C/W}$ |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1. Pulse Test: Pulse Width = 300  $\mu\text{s}$ , Duty Cycle  $\leq 2\%$

**勝特力材料 886-3-5753170**  
**勝特力电子(上海) 86-21-34970699**  
**勝特力电子(深圳) 86-755-83298787**  
[Http://www.100y.com.tw](http://www.100y.com.tw)

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.




ON Semiconductor®


<http://onsemi.com>

**16 AMPERE COMPLEMENTARY  
SILICON POWER  
TRANSISTORS  
250 VOLTS, 200 WATTS**

### MARKING DIAGRAM



TO-3PBL  
(TO-264)  
CASE 340G



x = 3 or 4  
A = Assembly Location  
YY = Year  
WW = Work Week  
G = Pb-Free Package

### ORDERING INFORMATION

| Device    | Package             | Shipping†       |
|-----------|---------------------|-----------------|
| MJL21193  | TO-264              | 25 Units / Rail |
| MJL21193G | TO-264<br>(Pb-Free) | 25 Units / Rail |
| MJL21194  | TO-264              | 25 Units / Rail |
| MJL21194G | TO-264<br>(Pb-Free) | 25 Units / Rail |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

Preferred devices are recommended choices for future use and best overall value.

**ELECTRICAL CHARACTERISTICS** ( $T_C = 25^\circ\text{C}$  unless otherwise noted)

| Characteristic   | Symbol        | Min | Typ | Max | Unit          |
|--|---------------|-----|-----|-----|---------------|
| Collector-Emitter Sustaining Voltage<br>( $I_C = 100\text{ mA}$ , $I_B = 0$ )              | $V_{CE(sus)}$ | 250 | -   | -   | Vdc           |
| Collector Cutoff Current<br>( $V_{CE} = 200\text{ Vdc}$ , $I_B = 0$ )                      | $I_{CEO}$     | -   | -   | 100 | $\mu\text{A}$ |
| Emitter Cutoff Current<br>( $V_{CE} = 5\text{ Vdc}$ , $I_C = 0$ )                          | $I_{EBO}$     | -   | -   | 100 | $\mu\text{A}$ |
| Collector Cutoff Current<br>( $V_{CE} = 250\text{ Vdc}$ , $V_{BE(off)} = 1.5\text{ Vdc}$ ) | $I_{CEX}$     | -   | -   | 100 | $\mu\text{A}$ |

**SECOND BREAKDOWN**

|   |           |             |        |        |   |
|---|-----------|-------------|--------|--------|---|
| Second Breakdown Collector Current with Base Forward Biased<br>( $V_{CE} = 50\text{ Vdc}$ , $t = 1\text{ s}$ (non-repetitive))<br>( $V_{CE} = 80\text{ Vdc}$ , $t = 1\text{ s}$ (non-repetitive)) | $I_{S/b}$ | 4.0<br>2.25 | -<br>- | -<br>- | A |
|---|-----------|-------------|--------|--------|---|

**ON CHARACTERISTICS**

|   |               |         |        |          |     |
|---|---------------|---------|--------|----------|-----|
| DC Current Gain<br>( $I_C = 8\text{ A}$ , $V_{CE} = 5\text{ Vdc}$ )<br>( $I_C = 16\text{ A}$ , $I_B = 5\text{ A}$ )                     | $h_{FE}$      | 25<br>8 | -<br>- | 75<br>-  |     |
| Base-Emitter On Voltage<br>( $I_C = 8\text{ A}$ , $V_{CE} = 5\text{ Vdc}$ )   | $V_{BE(on)}$  | -       | -      | 2.2      | Vdc |
| Collector-Emitter Saturation Voltage<br>( $I_C = 8\text{ A}$ , $I_B = 0.8\text{ A}$ )<br>( $I_C = 16\text{ A}$ , $I_B = 3.2\text{ A}$ ) | $V_{CE(sat)}$ | -<br>-  | -<br>- | 1.4<br>4 | Vdc |

**DYNAMIC CHARACTERISTICS**

|  |  |          |        |             |        |     |
|--|--|----------|--------|-------------|--------|-----|
| Total Harmonic Distortion at the Output<br>$V_{RMS} = 28.3\text{ V}$ , $f = 1\text{ kHz}$ , $P_{LOAD} = 100\text{ W}_{RMS}$<br>(Matched pair $h_{FE} = 50 @ 5\text{ A}/5\text{ V}$ ) | $h_{FE}$<br>unmatched<br>$h_{FE}$<br>matched | $T_{HD}$ | -<br>- | 0.8<br>0.08 | -<br>- | %   |
| Current Gain Bandwidth Product<br>( $I_C = 1\text{ A}$ , $V_{CE} = 10\text{ Vdc}$ , $f_{test} = 1\text{ MHz}$ )  |  | $f_T$    | 4      | -           | -      | MHz |
| Output Capacitance<br>( $V_{CB} = 10\text{ Vdc}$ , $I_E = 0$ , $f_{test} = 1\text{ MHz}$ )   |  | $C_{ob}$ | -      | -           | 500    | pF  |

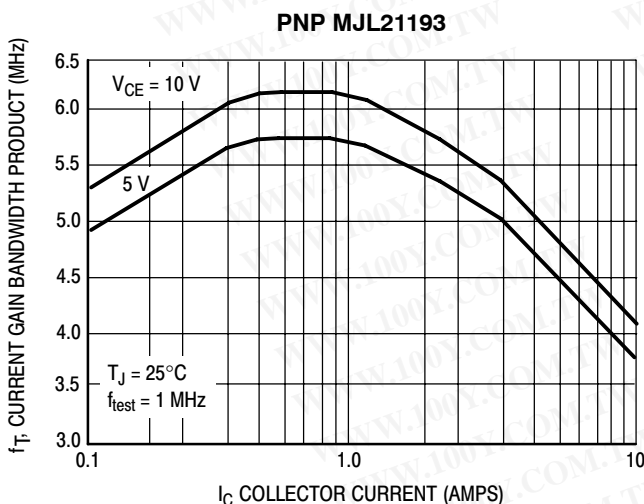


Figure 1. Typical Current Gain Bandwidth Product


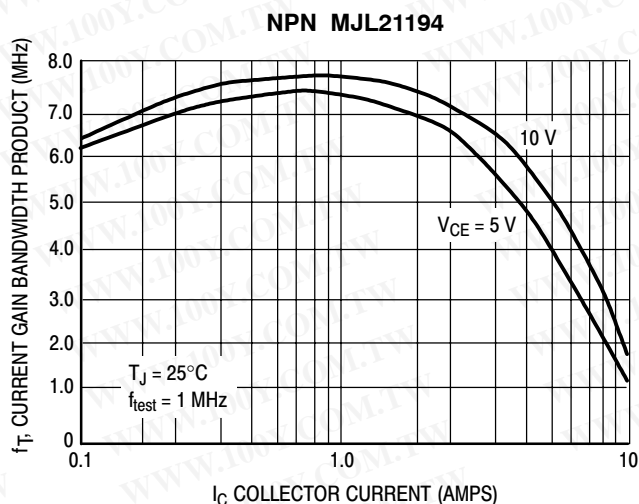


Figure 2. Typical Current Gain Bandwidth Product

# MJL21193, MJL21194


## TYPICAL CHARACTERISTICS

**PNP MJL21193**

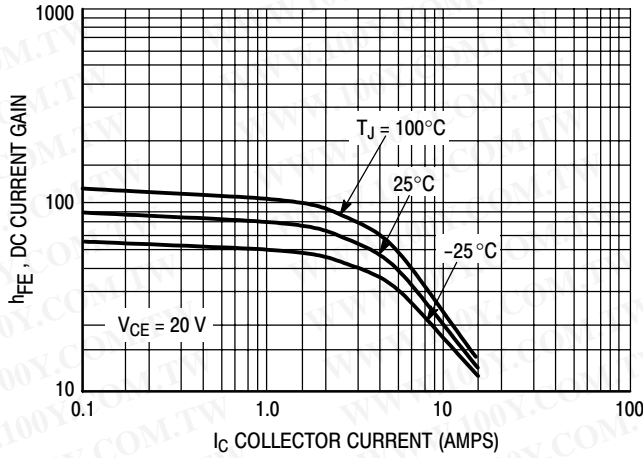


**Figure 3. DC Current Gain,  $V_{CE} = 20\text{ V}$**

**NPN MJL21194**

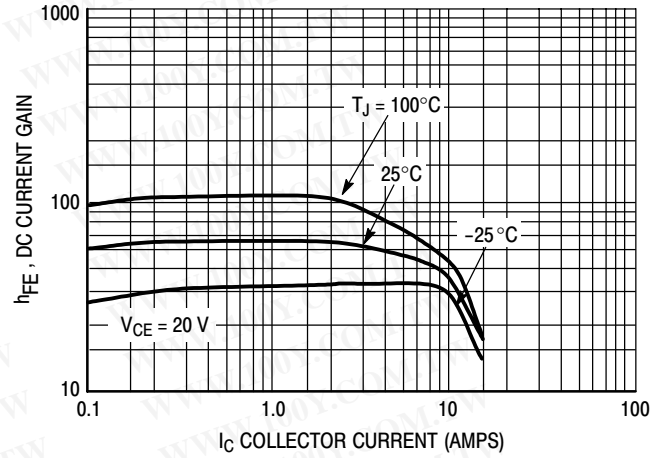


**Figure 4. DC Current Gain,  $V_{CE} = 20\text{ V}$**

**PNP MJL21193**

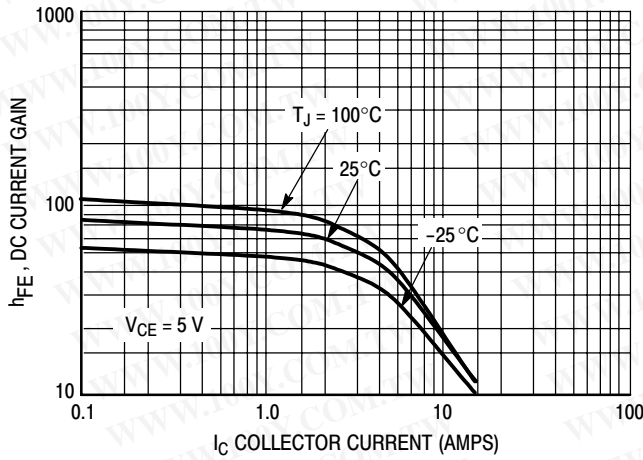


**Figure 5. DC Current Gain,  $V_{CE} = 5\text{ V}$**

**NPN MJL21194**

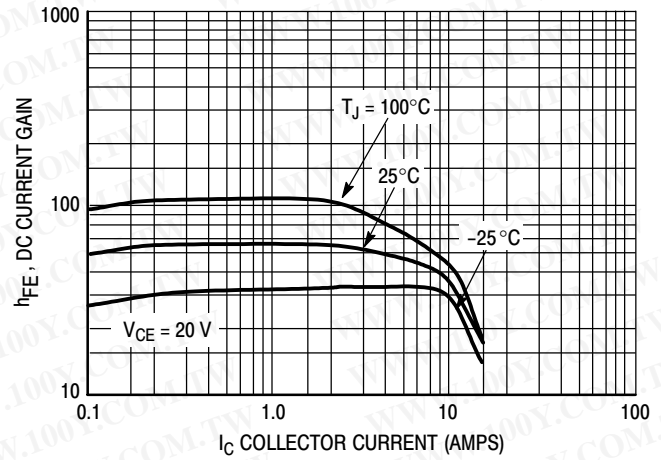


**Figure 6. DC Current Gain,  $V_{CE} = 5\text{ V}$**

**PNP MJL21193**

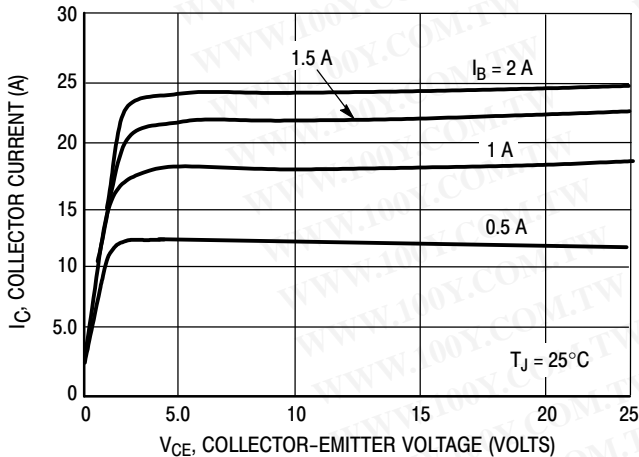

**Figure 7. Typical Output Characteristics**

**NPN MJL21194**

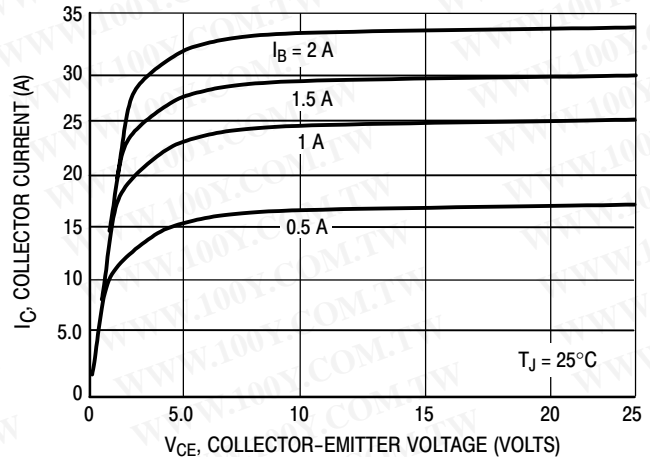

**Figure 8. Typical Output Characteristics**

# MJL21193, MJL21194

## TYPICAL CHARACTERISTICS

PNP MJL21193

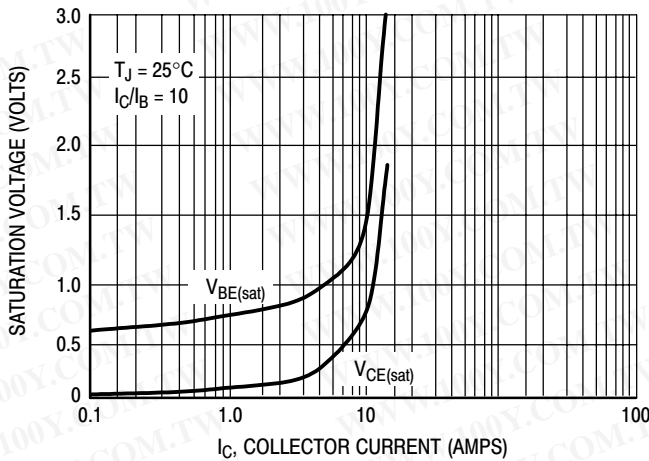


Figure 9. Typical Saturation Voltages

NPN MJL21194

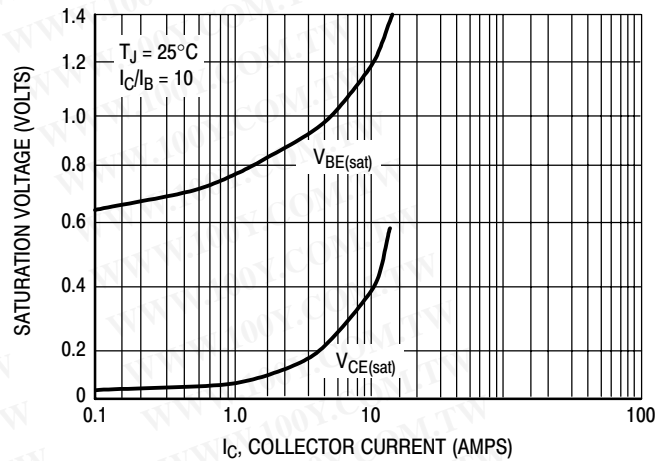


Figure 10. Typical Saturation Voltages

PNP MJL21193

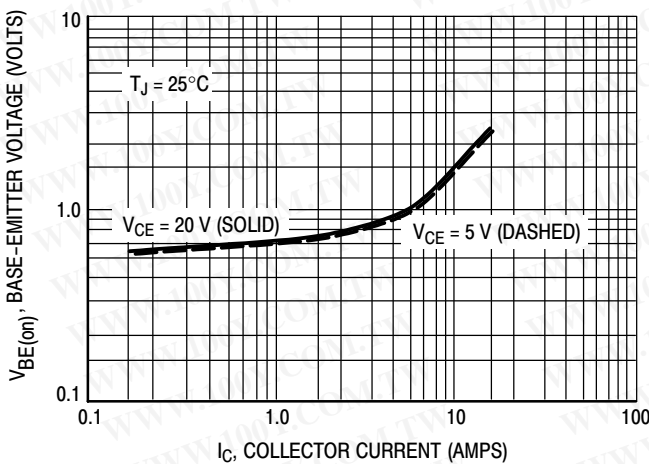


Figure 11. Typical Base-Emitter Voltage

NPN MJL21194

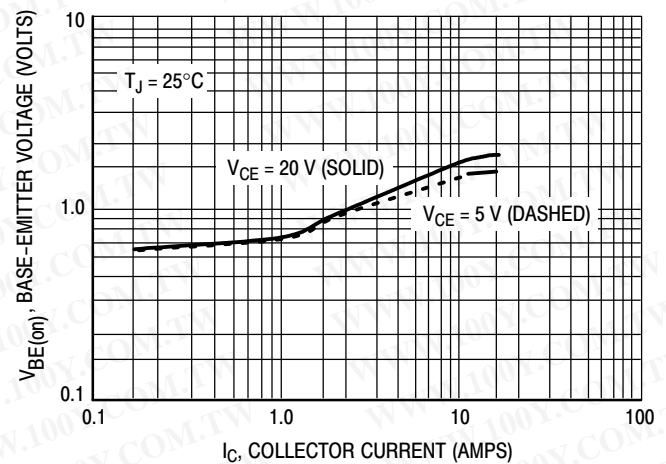


Figure 12. Typical Base-Emitter Voltage

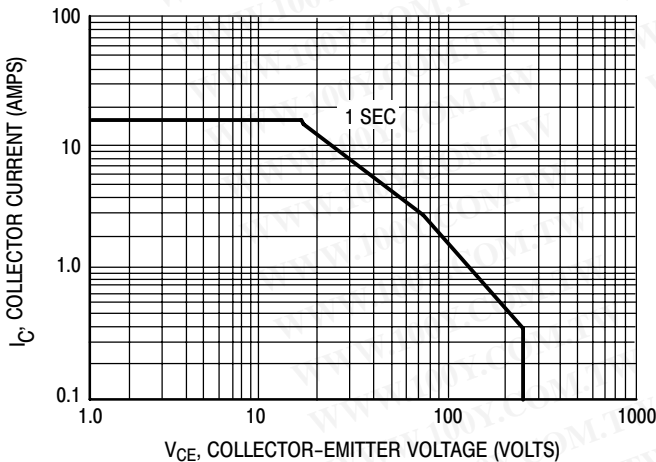


Figure 13. Active Region Safe Operating Area

There are two limitations on the power handling ability of a transistor; average junction temperature and secondary breakdown. Safe operating area curves indicate  $I_C - V_{CE}$  limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 13 is based on  $T_{J(pk)} = 150^\circ\text{C}$ ;  $T_C$  is variable depending on conditions. At high case temperatures, thermal limitations will reduce the power than can be handled to values less than the limitations imposed by second breakdown.

# MJL21193, MJL21194

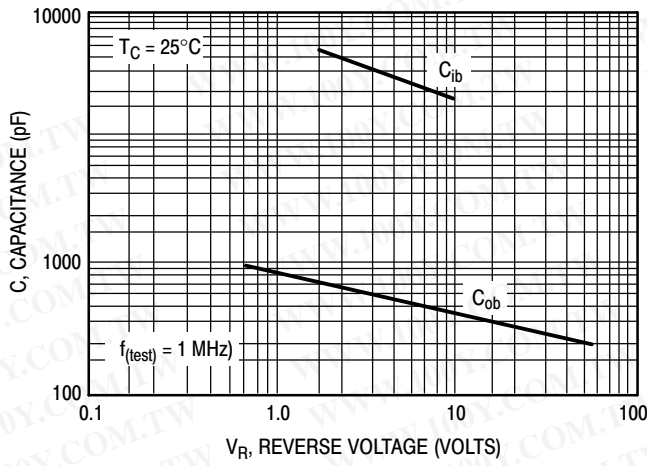


Figure 14. MJL21193 Typical Capacitance

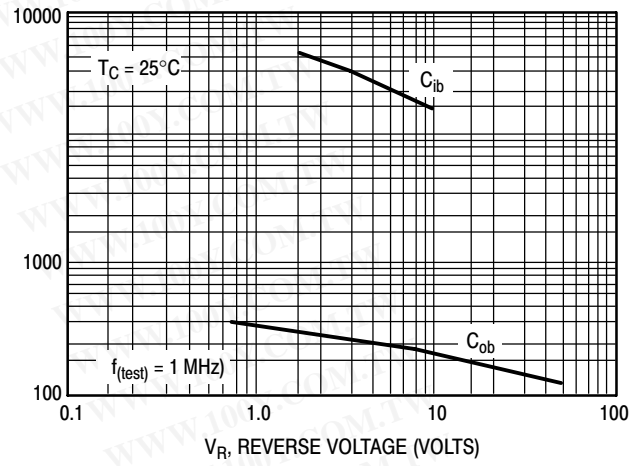


Figure 15. MJL21194 Typical Capacitance

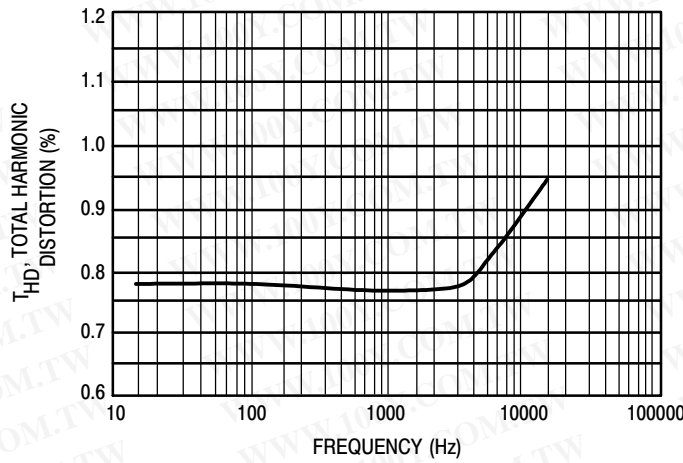


Figure 16. Typical Total Harmonic Distortion

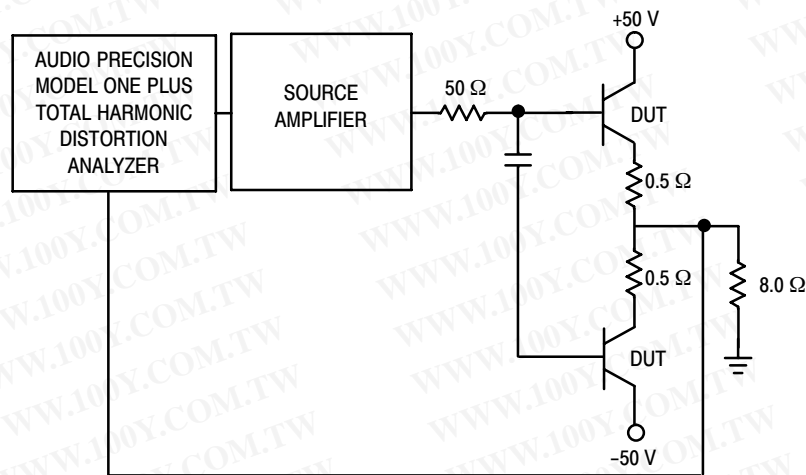



Figure 17. Total Harmonic Distortion Test Circuit

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

# MJL21193, MJL21194

## PACKAGE DIMENSIONS

TO-3BPL (TO-264)  
CASE 340G-02  
ISSUE J

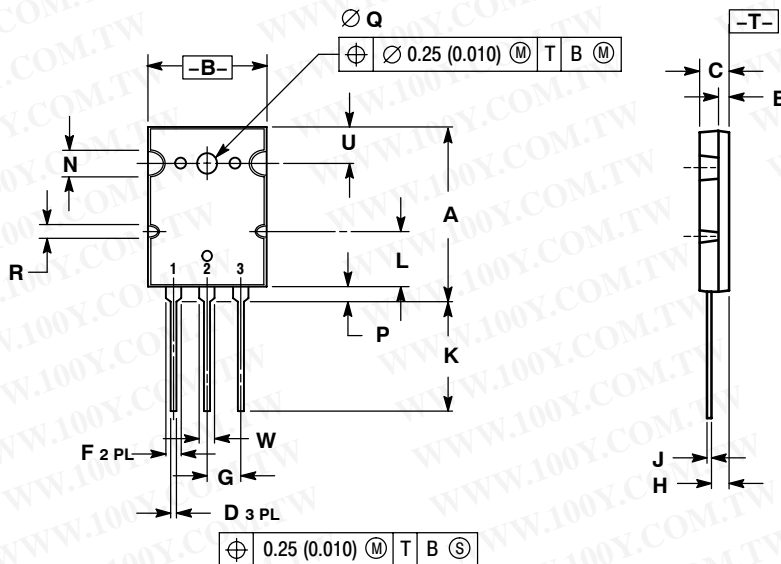

### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.

| DIM | MILLIMETERS |      | INCHES    |       |
|-----|-------------|------|-----------|-------|
|     | MIN         | MAX  | MIN       | MAX   |
| A   | 28.0        | 29.0 | 1.102     | 1.142 |
| B   | 19.3        | 20.3 | 0.760     | 0.800 |
| C   | 4.7         | 5.3  | 0.185     | 0.209 |
| D   | 0.93        | 1.48 | 0.037     | 0.058 |
| E   | 1.9         | 2.1  | 0.075     | 0.083 |
| F   | 2.2         | 2.4  | 0.087     | 0.102 |
| G   | 5.45 BSC    |      | 0.215 BSC |       |
| H   | 2.6         | 3.0  | 0.102     | 0.118 |
| J   | 0.43        | 0.78 | 0.017     | 0.031 |
| K   | 17.6        | 18.8 | 0.693     | 0.740 |
| L   | 11.2 REF    |      | 0.411 REF |       |
| N   | 4.35 REF    |      | 0.172 REF |       |
| P   | 2.2         | 2.6  | 0.087     | 0.102 |
| Q   | 3.1         | 3.5  | 0.122     | 0.137 |
| R   | 2.25 REF    |      | 0.089 REF |       |
| U   | 6.3 REF     |      | 0.248 REF |       |
| W   | 2.8         | 3.2  | 0.110     | 0.125 |

勝特力材料 886-3-5753170  
 胜特力电子(上海) 86-21-34970699  
 胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

ON Semiconductor and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
 P.O. Box 5163, Denver, Colorado 80217 USA  
 Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
 Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
 Email: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

N. American Technical Support: 800-282-9855 Toll Free  
 USA/Canada  
 Europe, Middle East and Africa Technical Support:  
 Phone: 421 33 790 2910  
 Japan Customer Focus Center  
 Phone: 81-3-5773-3850

ON Semiconductor Website: [www.onsemi.com](http://www.onsemi.com)

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative