

勝特力電材超市-龍山店 886-3-5773766
 勝特力電材超市-光復店 886-3-5729570
 勝特力電子(上海) 86-21-34970699
 勝特力電子(深圳) 86-755-83298787
<http://www.100y.com.tw>

N-Channel MOSFET Transistor

2SK1059

FEATURES

- Drain Current $-I_D = 10A @ TC = 25^\circ C$
- Drain Source Voltage:
: $V_{DSS} = 60V (Min)$
- Static Drain-Source On-Resistance:
: $R_{DS(on)} = 0.135\Omega (Max)$
- 100% avalanche tested
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

DESCRIPTION



- motor drive, DC-DC converter, power switch and solenoid drive.

ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ C$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{DSS}	Drain-Source Voltage	60	V
V_{GS}	Gate-Source Voltage-Continuous	± 20	V
I_D	Drain Current-Continuous	± 5	A
I_{DM}	Drain Current-Single Pulse	20	A
PD	Total Dissipation @ $TC = 25^\circ C$	50	W
T_J	Max. Operating Junction Temperature	150	$^\circ C$
T_{stg}	Storage Temperature	-55~150	$^\circ C$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th(j-c)}$	Thermal Resistance, Junction to Case	5	$^\circ C/W$

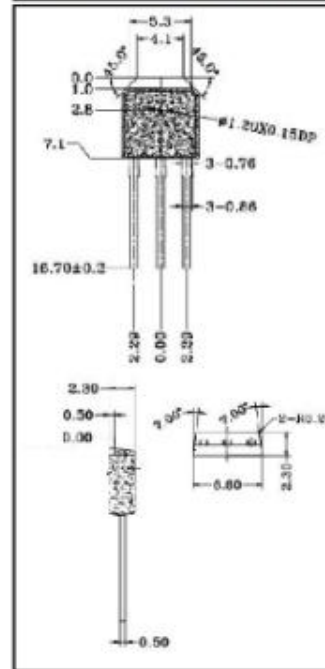

ELECTRICAL CHARACTERISTICS

TC=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	MAX	UNIT
V(BR)DS	Drain-Source Breakdown Voltage	VGS= 0; ID= 1mA	60	--	V
VGS(th)	Gate Threshold Voltage	VDS= 10V; ID= 1mA	1	2.5	V
RDS(on)	Drain-Source On-Resistance	VGS= 10V; ID= 3A	--	0.135	Ω
IGSS	Gate-Body Leakage Current	VGS= ±20V; VDS= 0	--	± 0.1	uA
IDSS	Zero Gate Voltage Drain Current	VDS= 60V; VGS= 0	--	10	uA
VSD	Forward On-Voltage	IS= 10A; VGS= 0	--	1.5	V

NOTICE :

ISC reserves the rights to make changes of the content herein the datasheet at any time without notification. The information contained herein is presented only as a guide for the applications of our products.

ISC products are intended for usage in general electronic equipment. The products are not designed for use in equipment which require specialized quality and/or reliability, or in equipment which could have applications in hazardous environments, aerospace industry, or medical field. Please contact us if you intend our products to be used in these special applications.

ISC makes no warranty or guarantee regarding the suitability of its products for any particular purpose, nor does ISC assume any liability arising from the application or use of any products, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.