

SHINDENGEN

Switching Power Transistor


HFX Series

2SC4230
(T2V80HFX)

2A NPN

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

OUTLINE DIMENSIONS

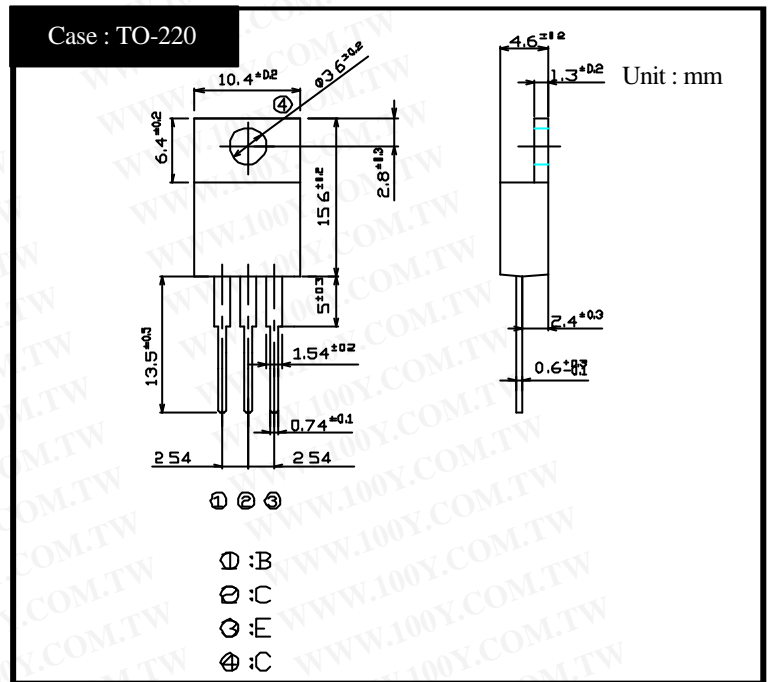

RATINGS

Absolute Maximum Ratings


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T _{stg}		-55 ~ 150	
Junction Temperature	T _j		150	
Collector to Base Voltage	V _{CBO}		1200	V
Collector to Emitter Voltage	V _{CEO}		800	V
Emitter to Base Voltage	V _{EBO}		7	V
Collector Current DC	I _C		2	A
Collector Current Peak	I _{CP}		4	
Base Current DC	I _B		1	A
Base Current Peak	I _{BP}		2	
Total Transistor Dissipation	P _T	T _c = 25	50	W
Mounting Torque	TOR	(Recommended torque : 0.3N·m)	0.5	N·m

Electrical Characteristics (T_c=25)

Item	Symbol	Conditions	Ratings	Unit
Collector to Emitter Sustaining Voltage	V _{CEO(sus)}	I _C = 0.1A	Min 800	V
Collector Cutoff Current	I _{CBO}	At rated Voltage	Max 0.1	mA
	I _{CEO}		Max 0.1	
Emitter Cutoff Current	I _{EBO}	At rated Voltage	Max 0.1	mA
DC Current Gain	h _{FE}	V _{CE} = 5V, I _C = 1A	Min 8	
	h _{FEL}	V _{CE} = 5V, I _C = 1mA	Min 7	
Collector to Emitter Saturation Voltage	V _{CE(sat)}	I _C = 1A	Max 1.0	V
Base to Emitter Saturation Voltage	V _{BE(sat)}	I _B = 0.2A	Max 1.5	V
Thermal Resistance	θ _{JC}	Junction to case	Max 2.5	/W
Transition Frequency	f _T	V _{CE} = 10V, I _C = 0.2A	TYP 8	MHz
Turn on Time	t _{on}	I _C = 1A	Max 0.5	μs
Storage Time	t _s	I _{B1} = 0.2A, I _{B2} = 0.4A	Max 3.5	
Fall Time	t _f	R _L = 250 , V _{BB2} = 4V	Max 0.3	


2SC4230

$h_{FE} - I_C$

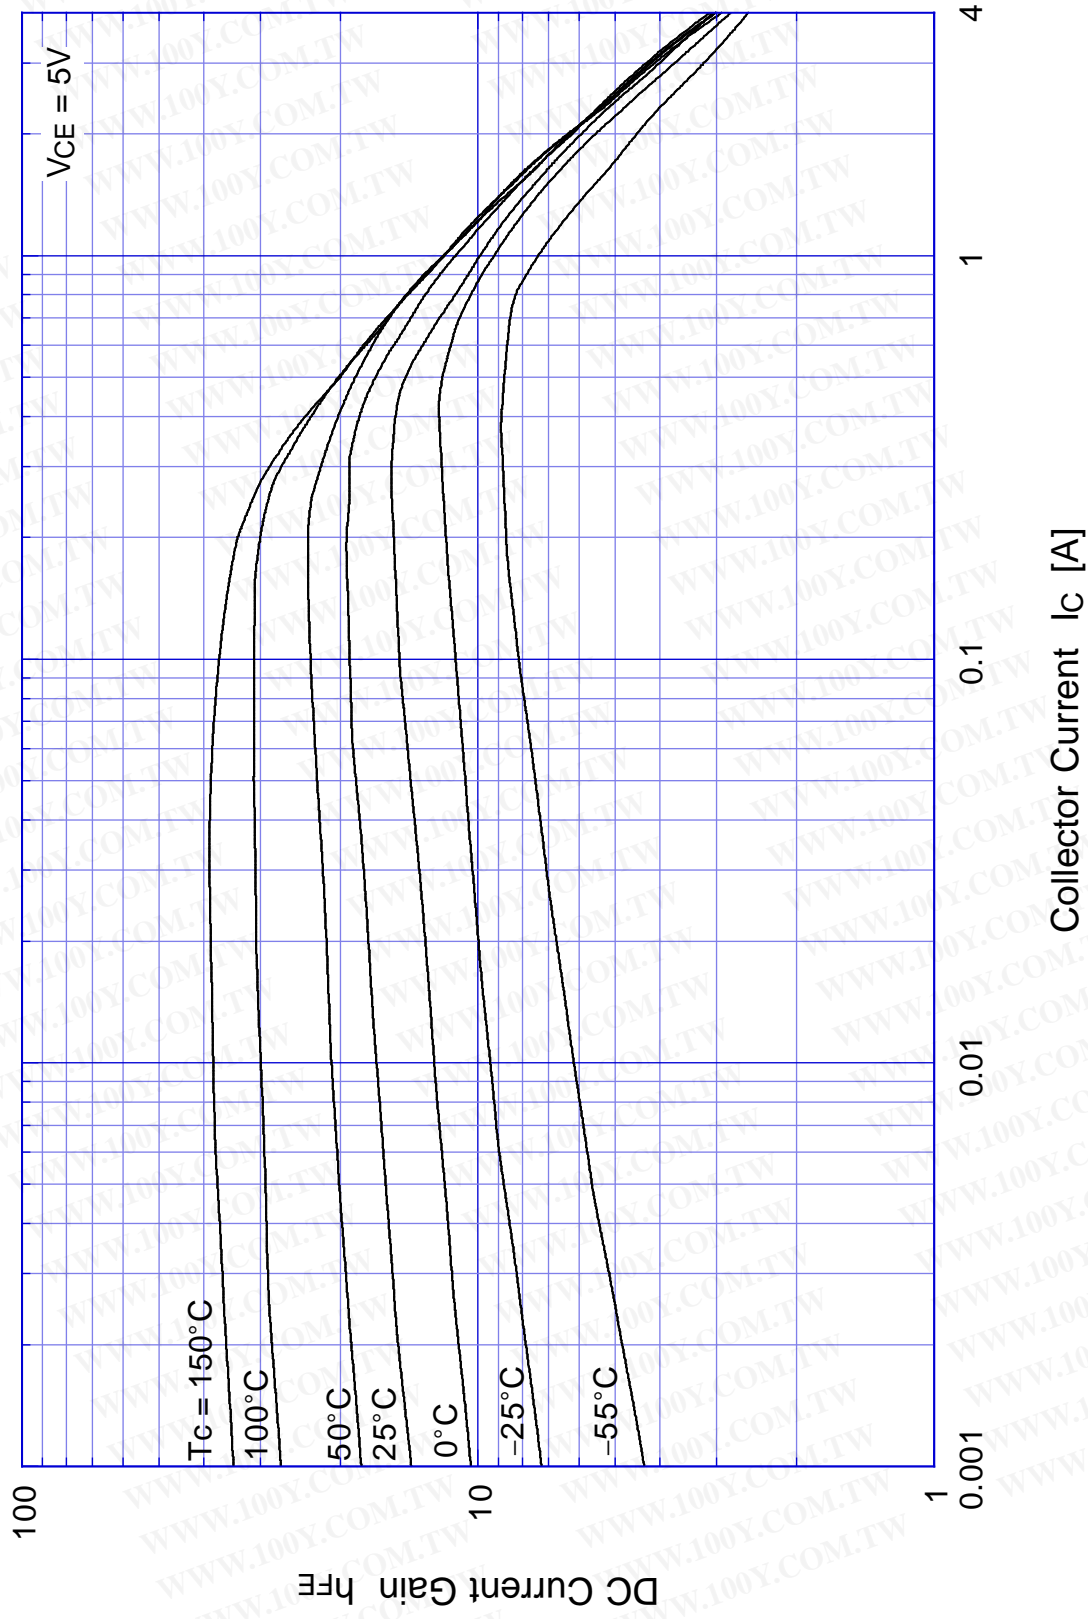


2SC4230

Saturation Voltage

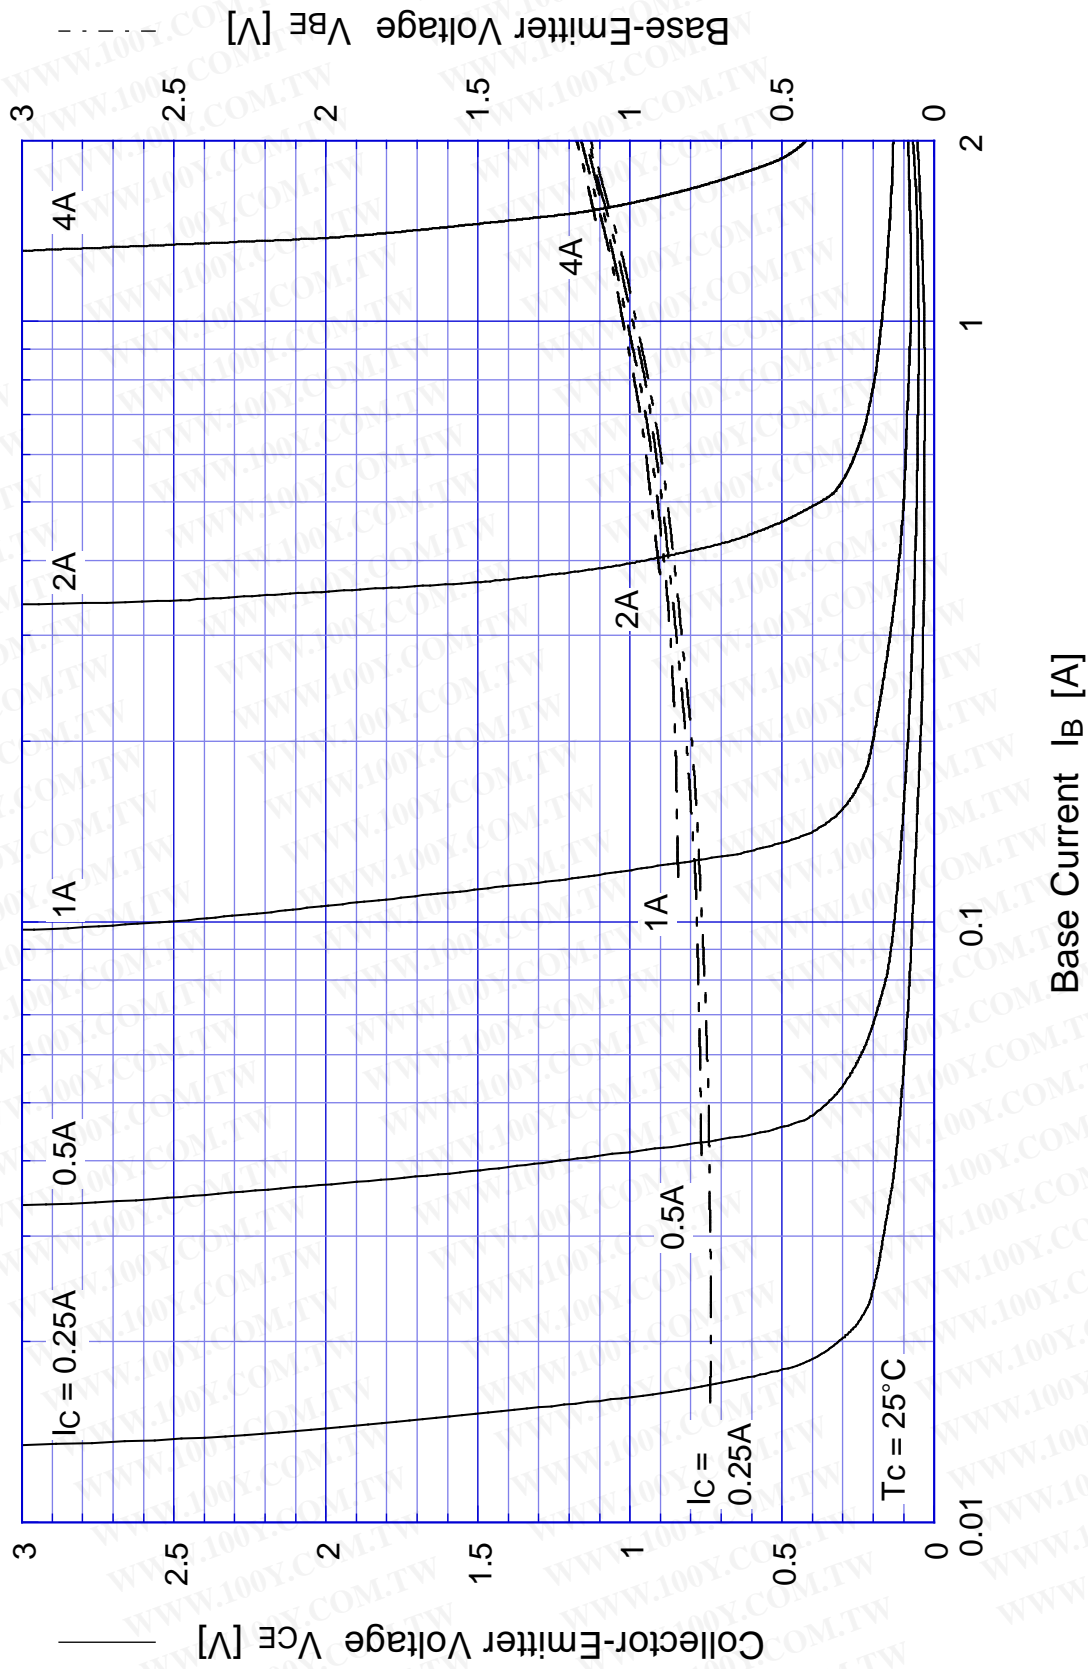


2SC4230

Switching Time - I_C

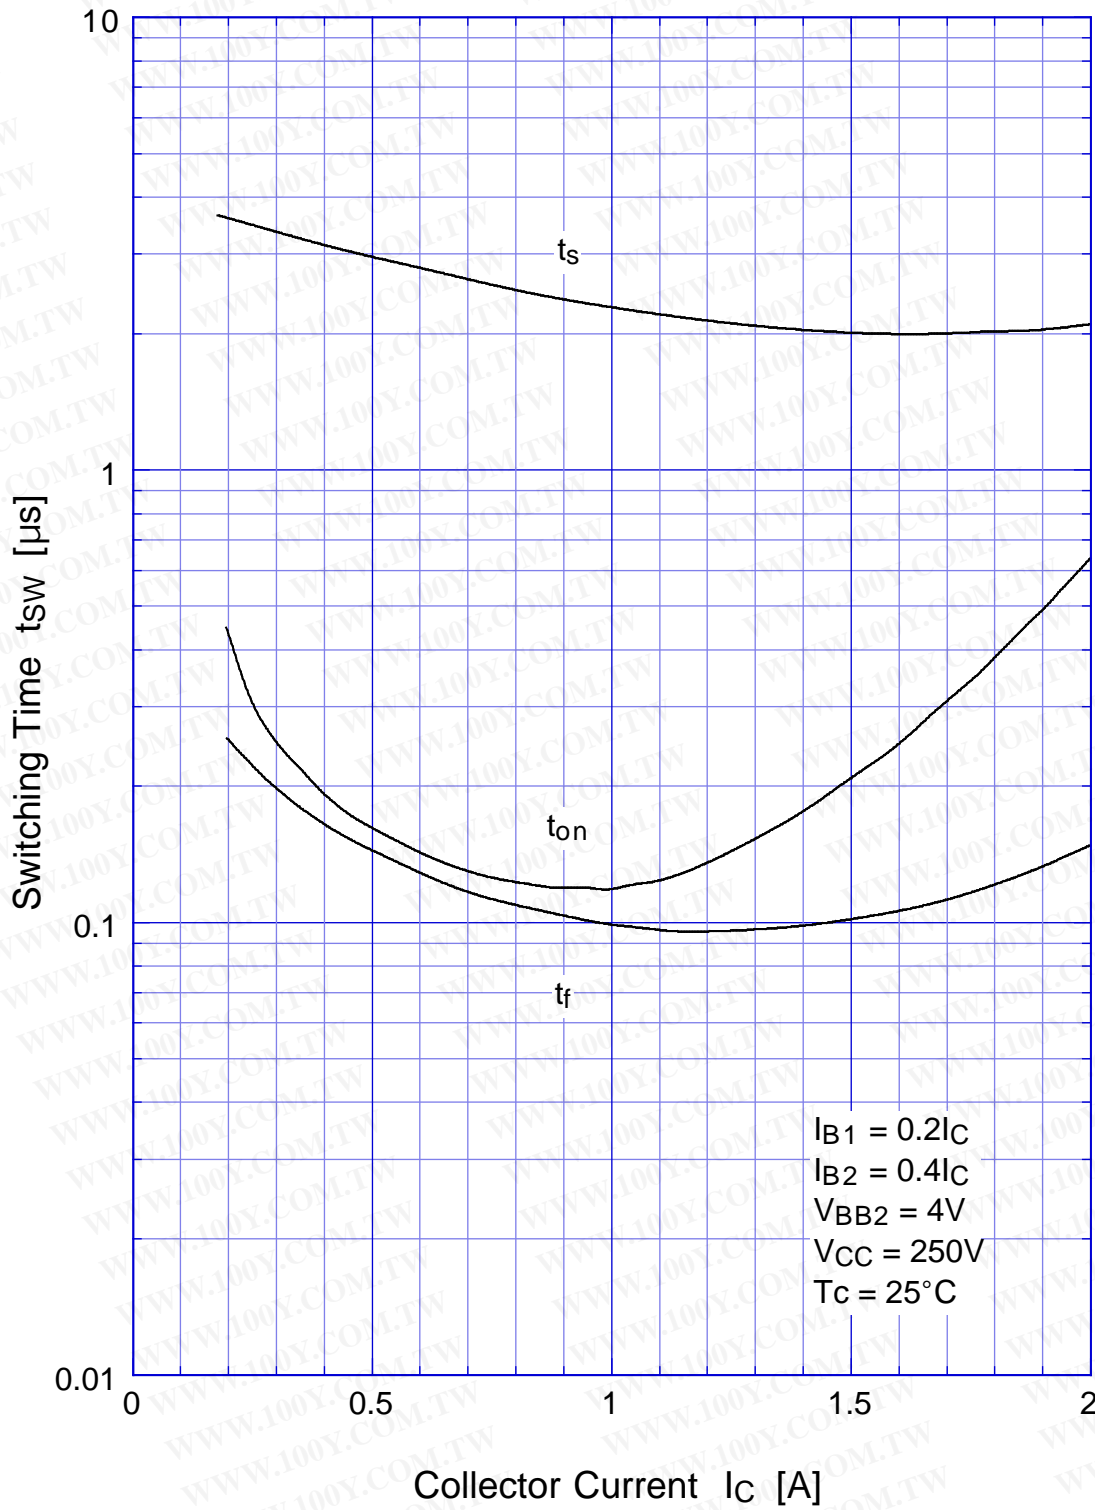


2SC4230

Switching Time - V_{CC}

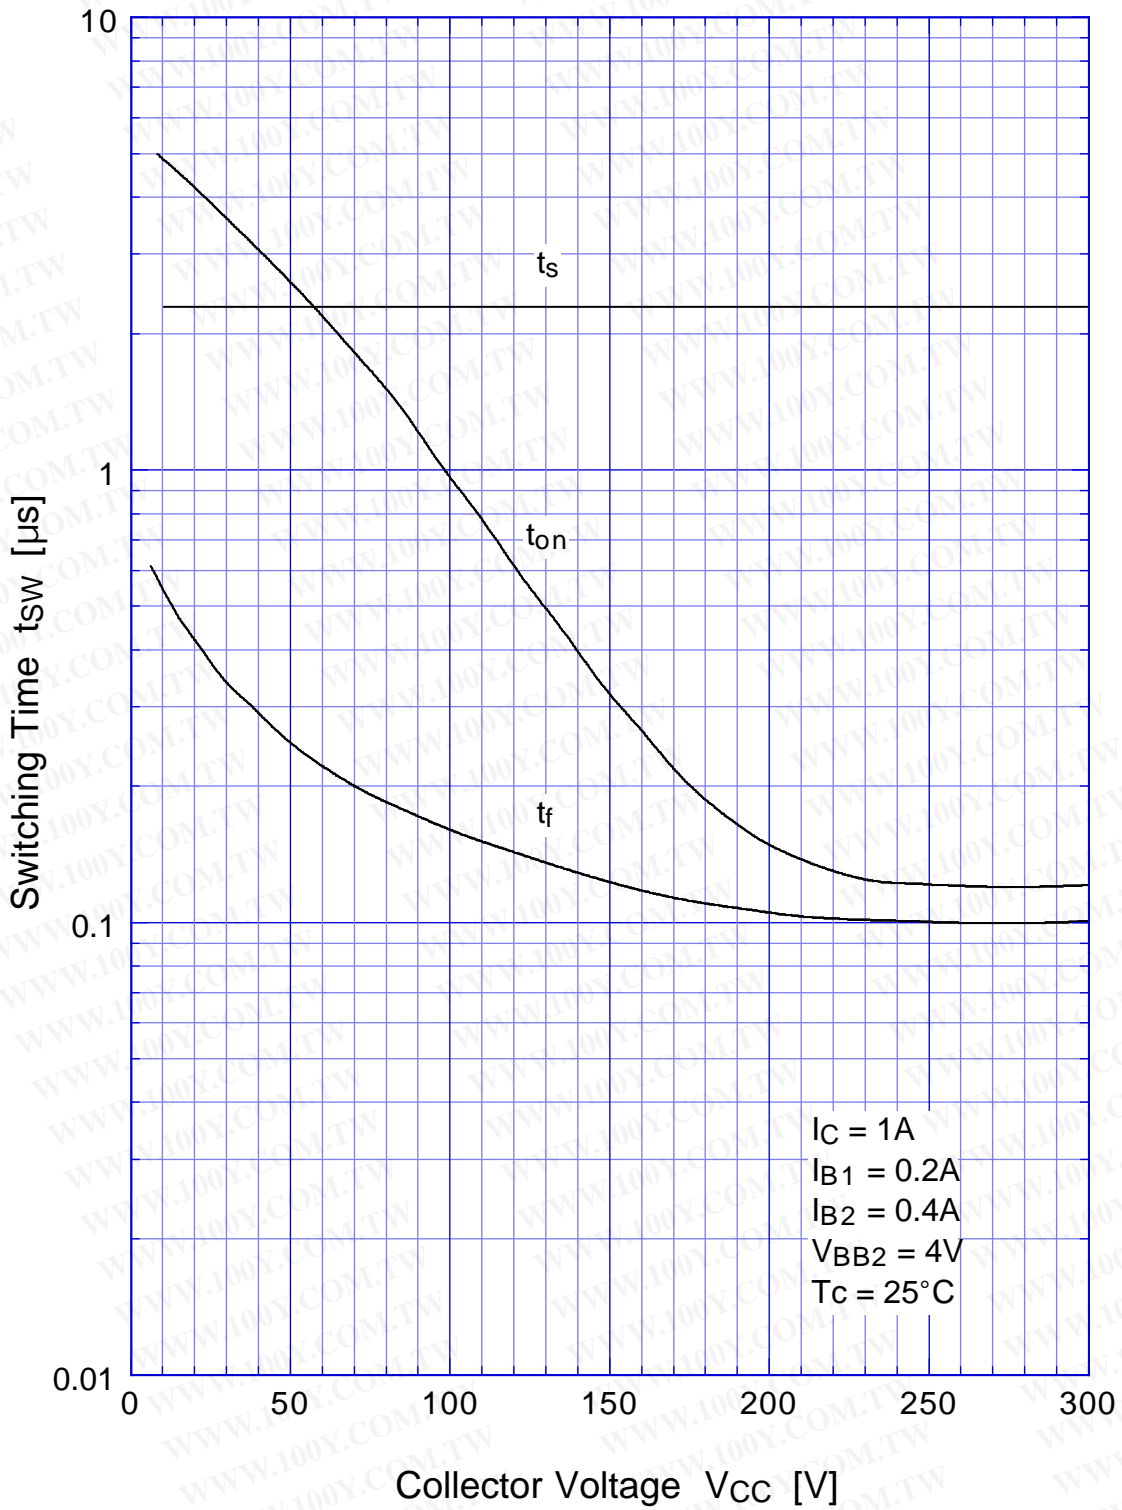


2SC4230


Switching Time - T_c

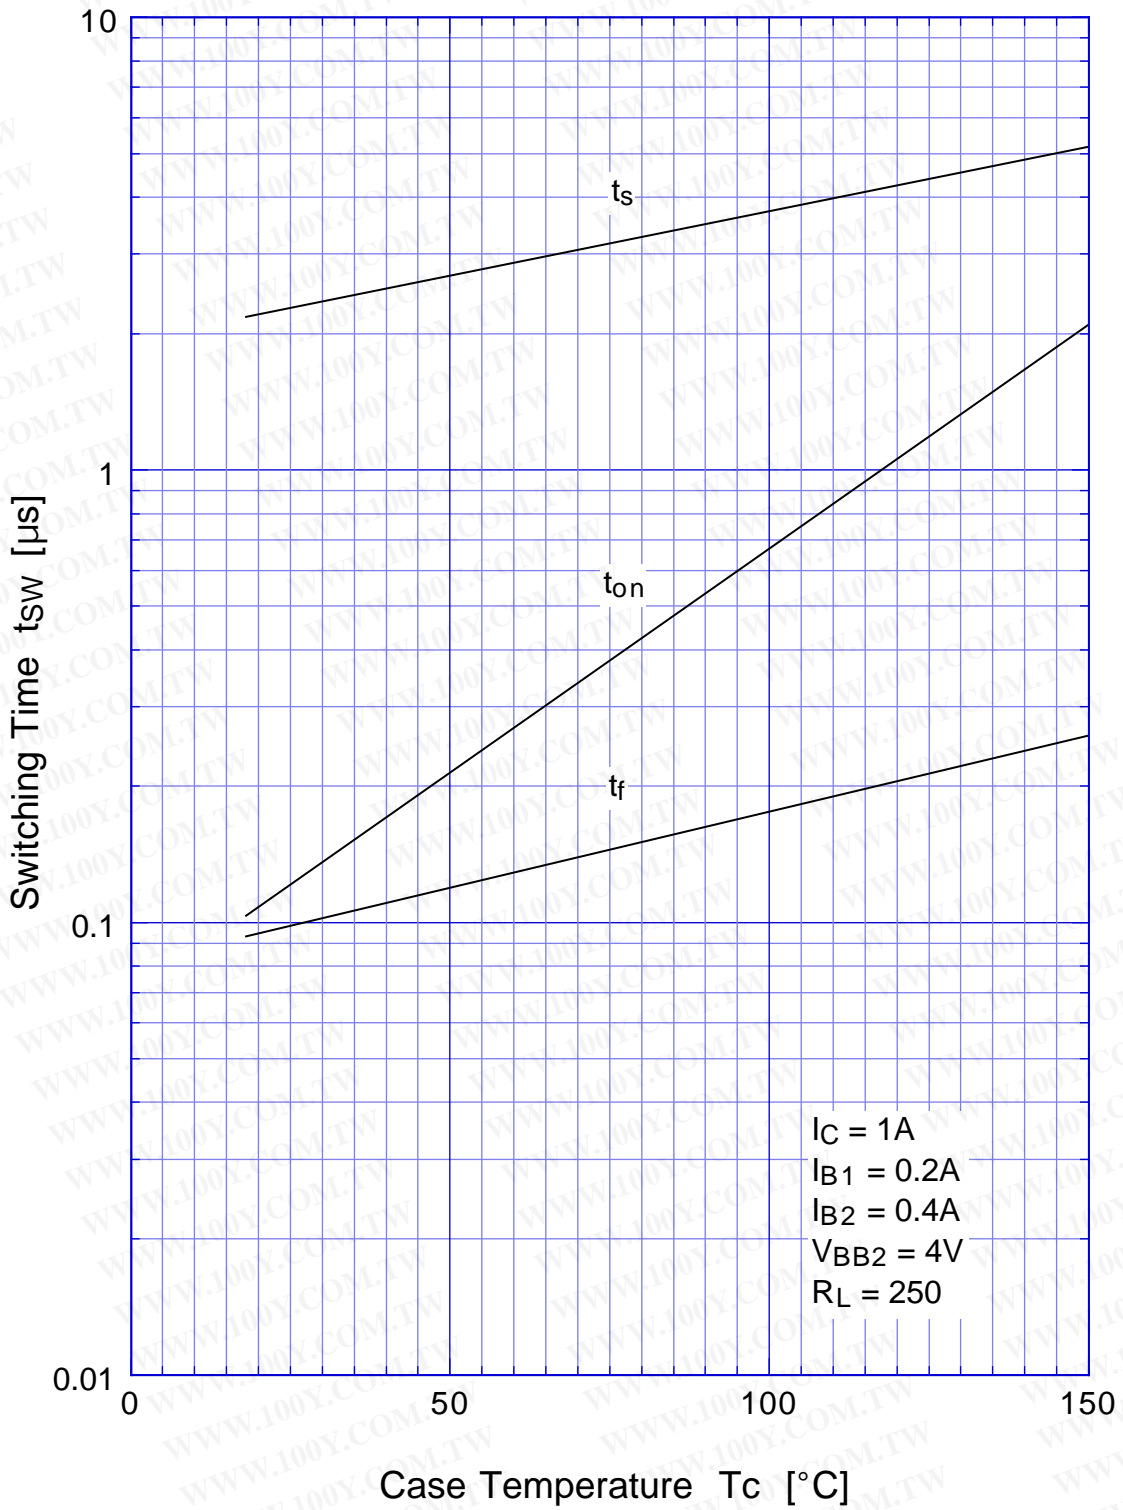

2SC4230 L-Load Switching Time - I_c

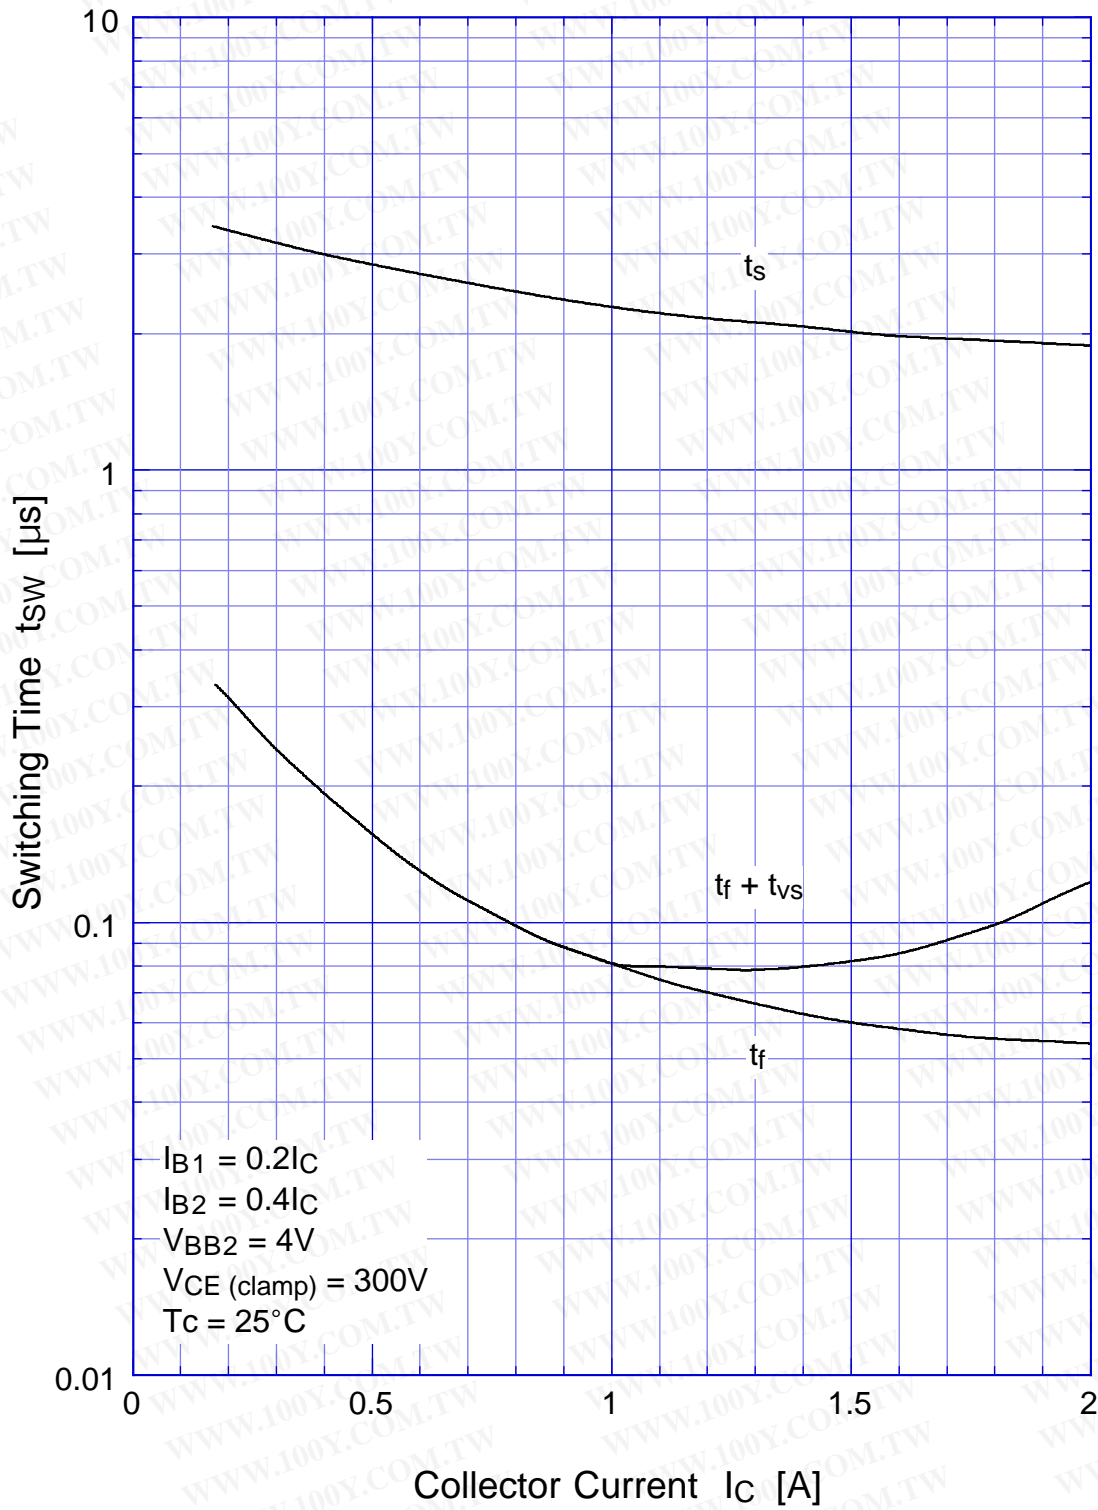


2SC4230 L-Load Switching Time - I_C (At High Temperature)

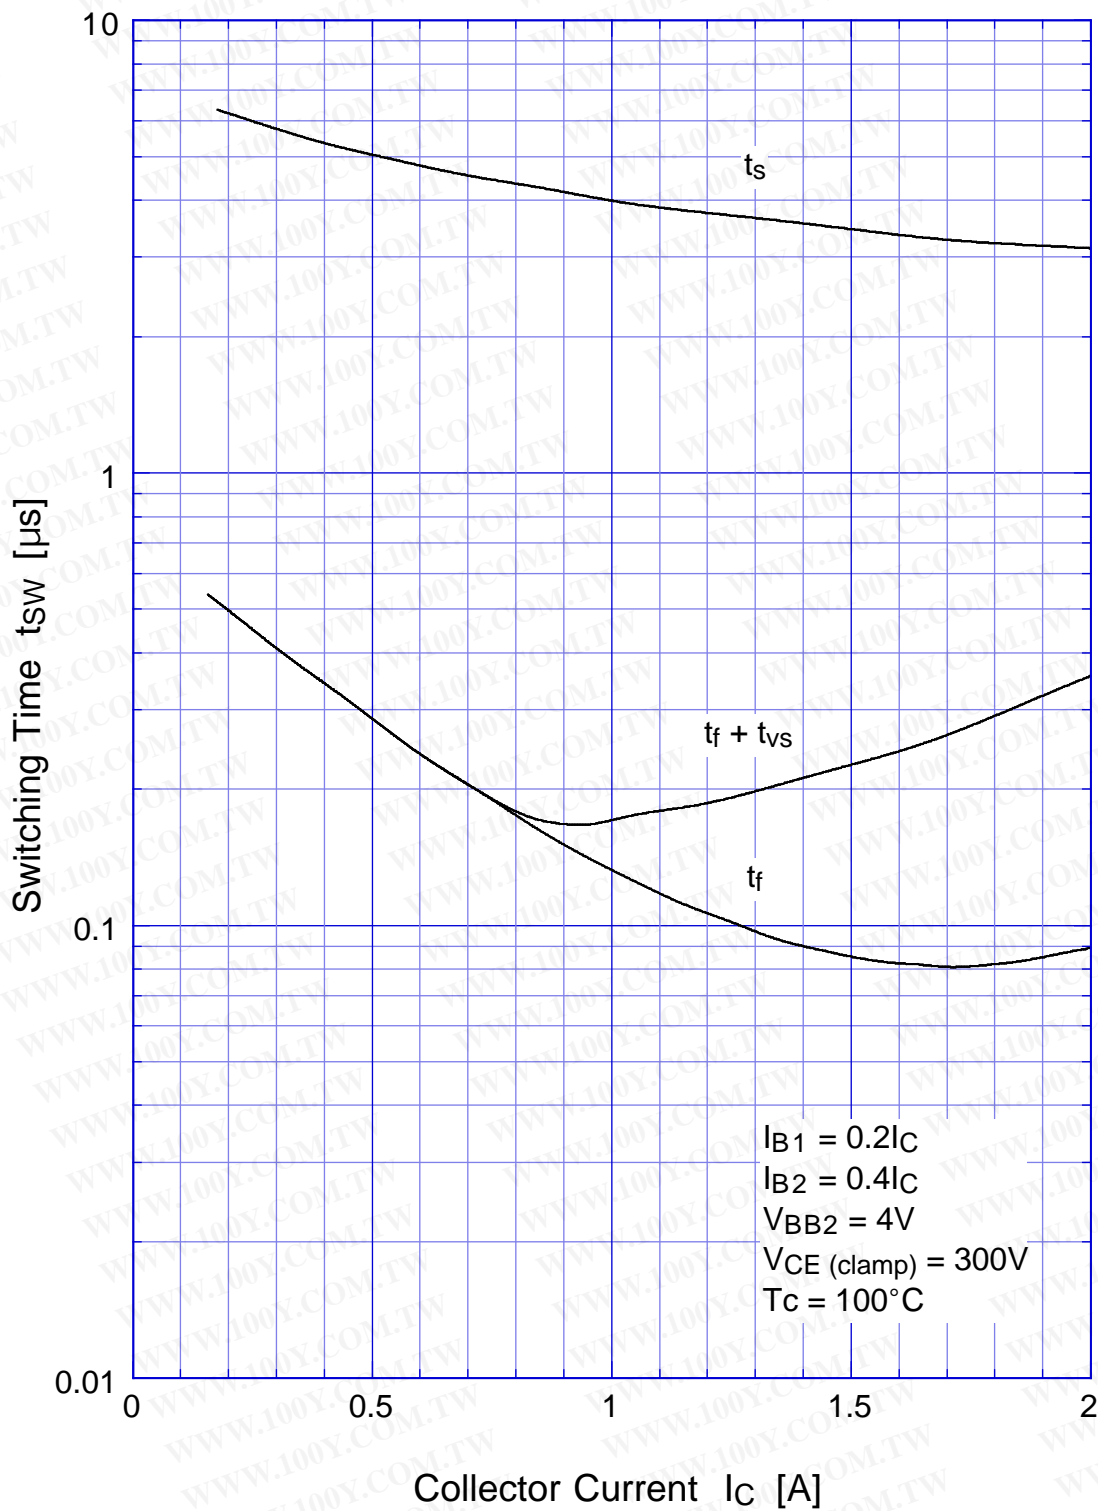


2SC4230


Transient Thermal Impedance

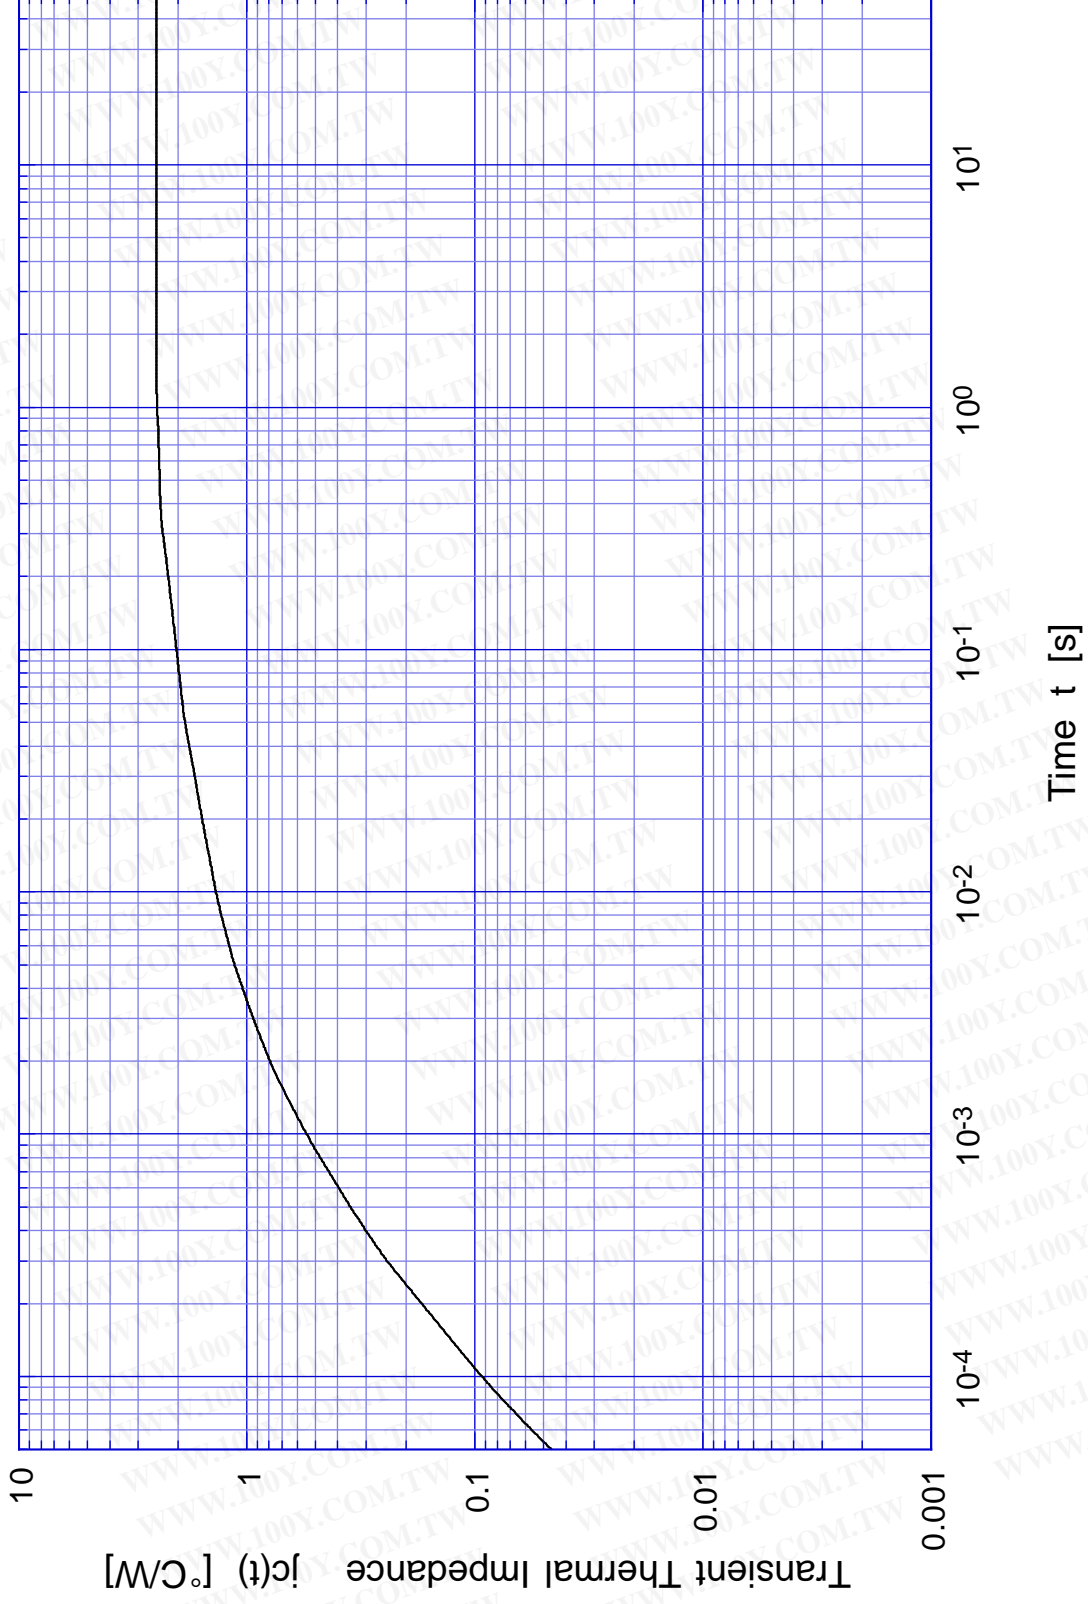

2SC4230 Forward Bias SOA

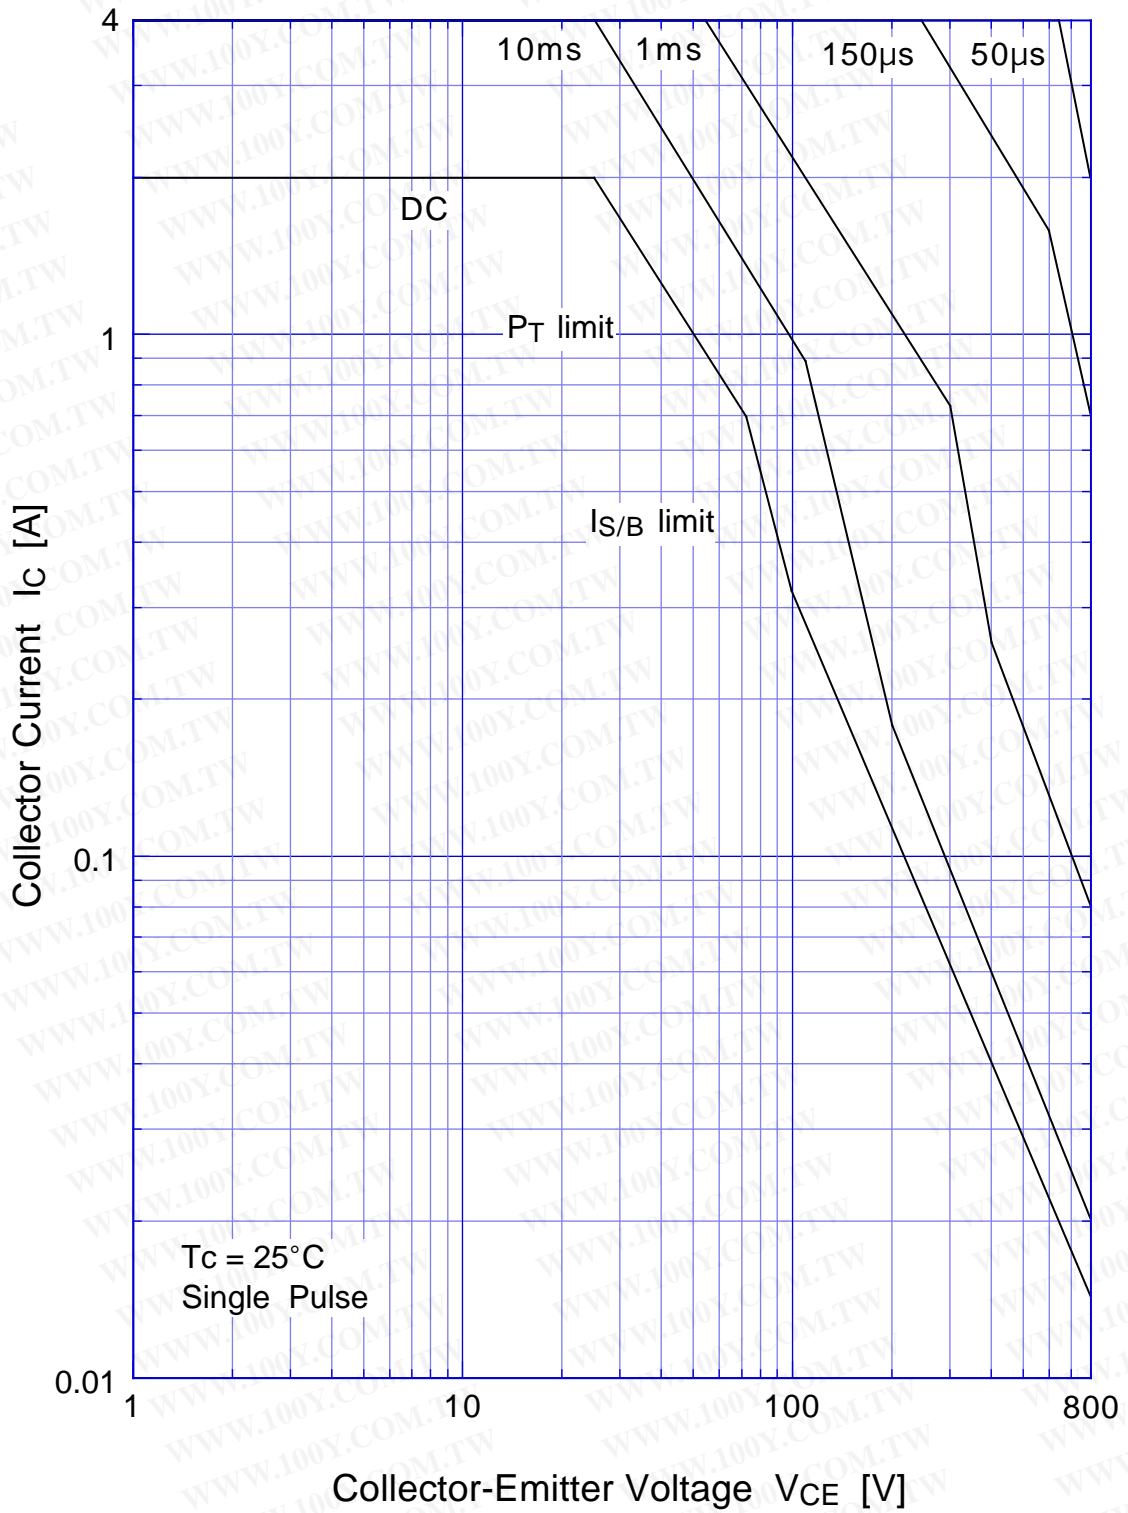


2SC4230 Collector Current Derating

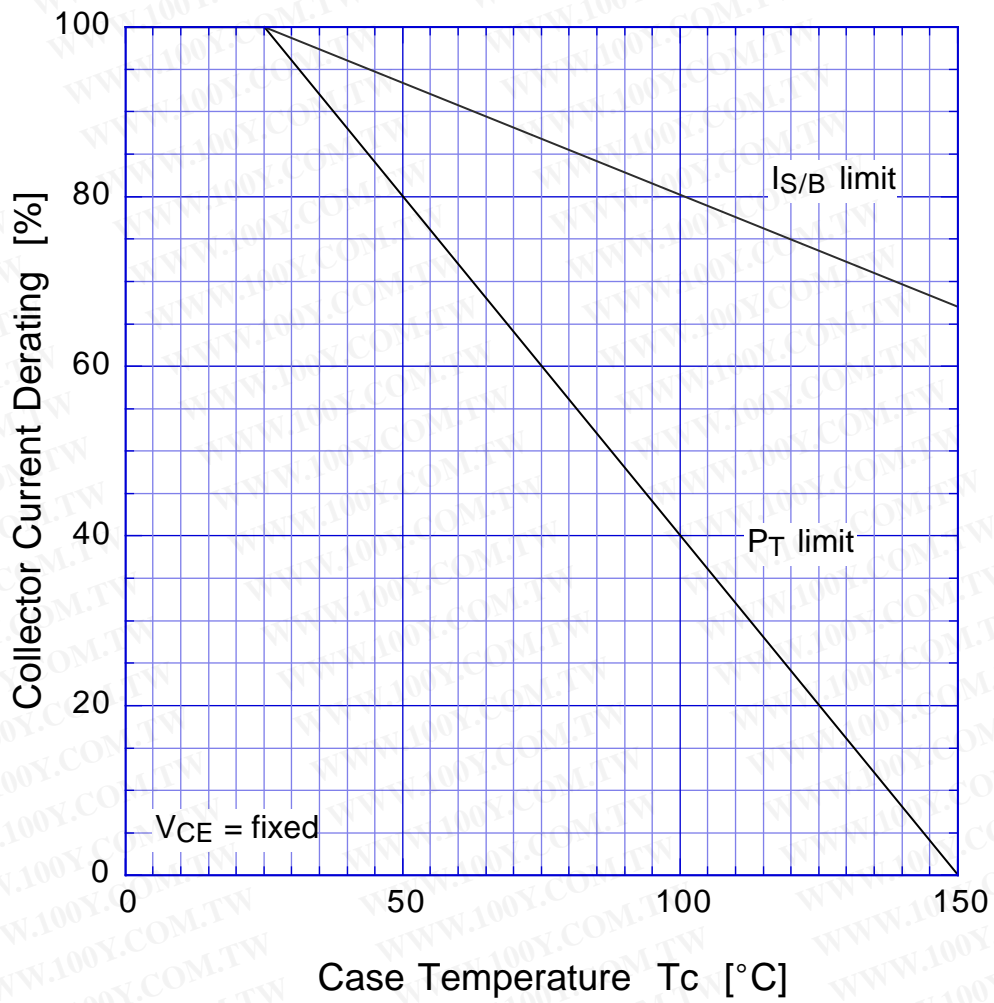

2SC4230

Reverse Bias SOA

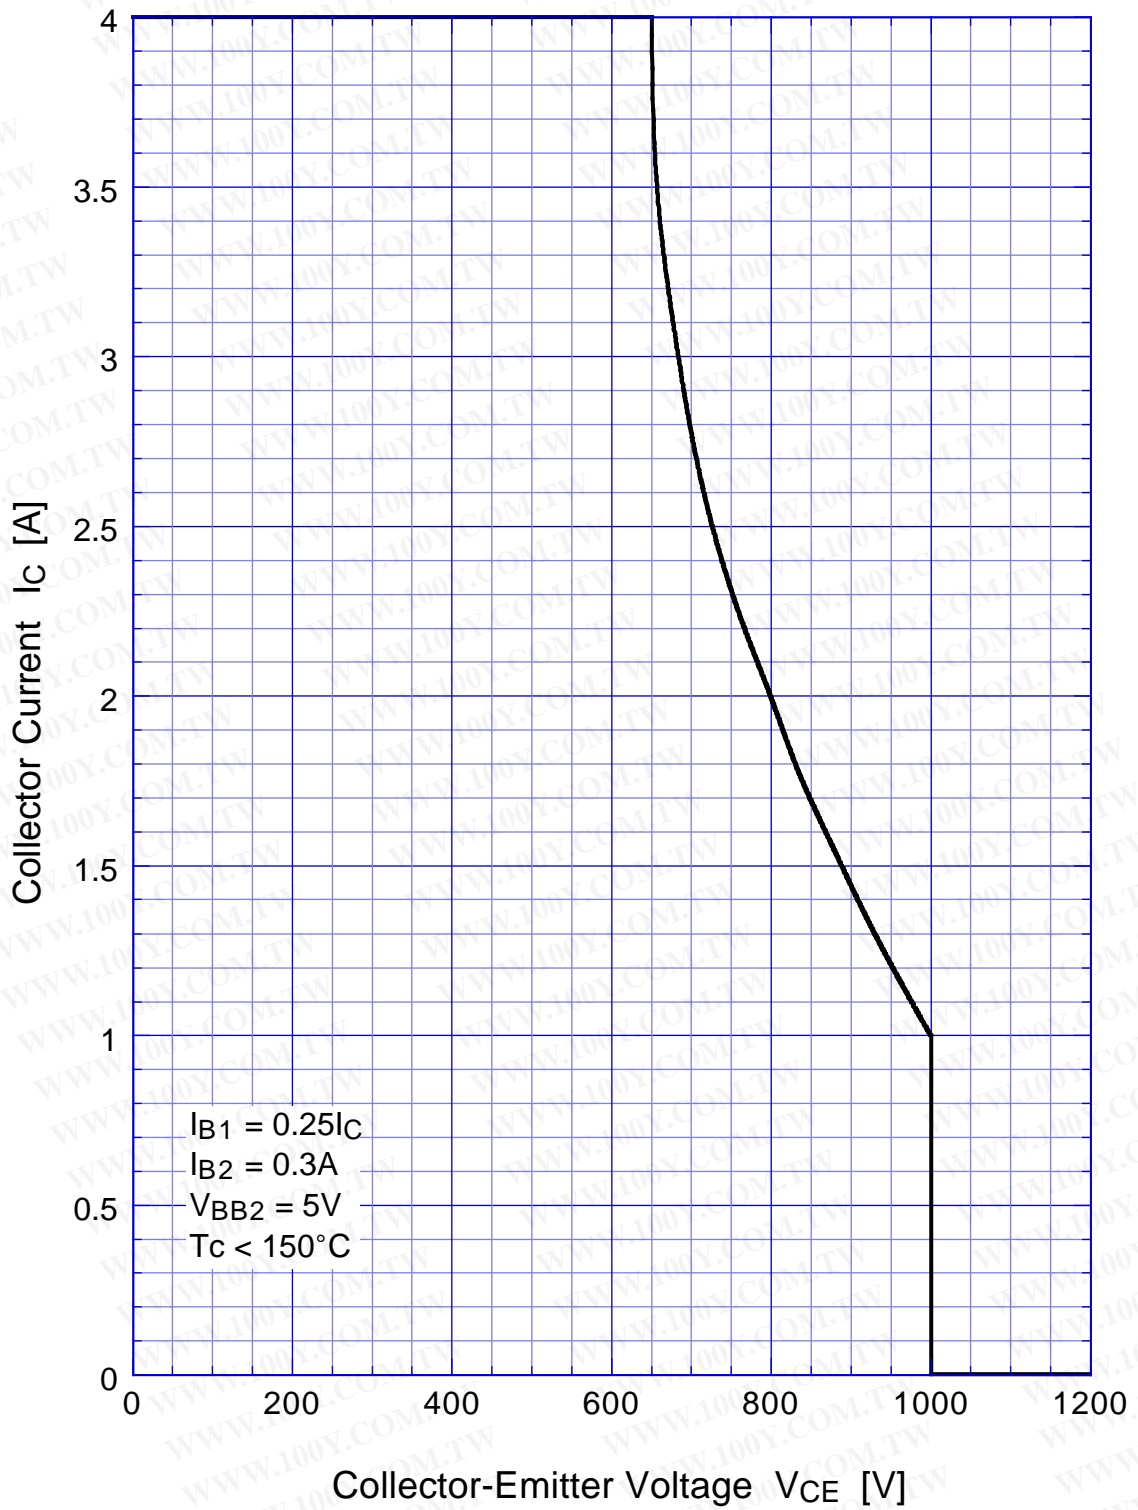

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)