

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 07/02/06'	~	LJC 07/02/06'
B	ADD P/N CODE	LJC 12/12/13'	~	LJC 12/12/13'
C	ADD BEND TYPE	JLZ 12/30/14'	~	

NOTES:

1. SPECIFICATIONS:

- CONTACT RESISTANCE: 20mΩ Max.
- DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
- INSULATION RESISTANCE: 1000MΩ Min.
- OPERATING TEMPERATURE: -40°C~+105°C.
- MALE PIN RANGE: $\phi 0.381 \sim 0.635$.
- CURRENT RATING: 3A Per Pin Max.

2. PRODUCT NUMBER CODE:


DS1002-01 - X X X X X - X

- CLIP TYPE®
JK: IMPORT
GC: DOMESTIC
- Bend Type(Single Row Only) ③
- A: R1 Type
B: R2 Type
- Clip plating
1: Tin 150u" 2: Tin 200u"
3: G/F 4: Gold 3u"
5: Gold 10u" 6: Gold 15u"
- Pin plating
1: Tin 150u" 2: Tin 200u"
3: G/F 4: Gold 3u"
5: Gold 10u" 6: Gold 15u"
- Mounting type
V: V/T TYPE
R: R/A TYPE
S: SMT TYPE
- No. of contacts
1*1 - 1*64
2*1 - 2*40

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	10F1
DRAWING NO.	C-DS1002-01-XXXX-X-C		


PROJECTION	TITLE	2.54mm IC SOCKET(Machine Pin)	
UNITS	mm	R/A, V/T & SMT Type	
SHEET SIZE	A4	SERIES	DS1002-01 SERIES
 CONNFLY®			

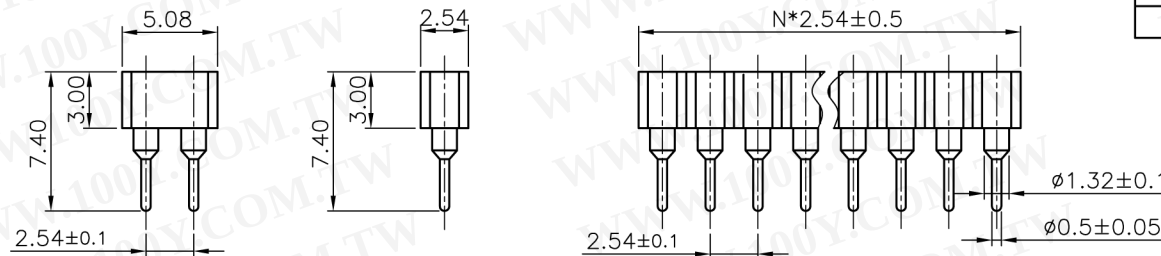

Dual rows

Single row


V/T TYPE

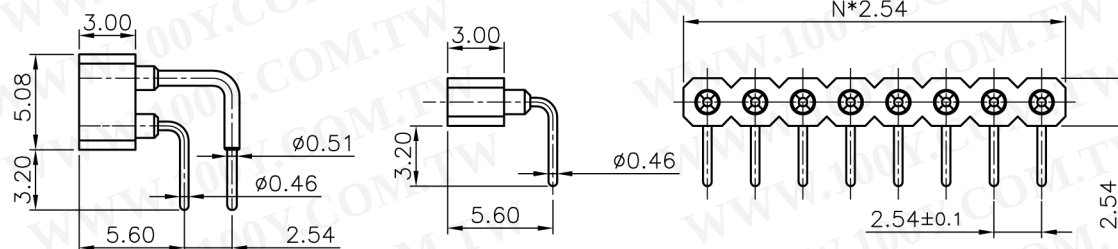

Dual rows

Single row

R/A TYPE

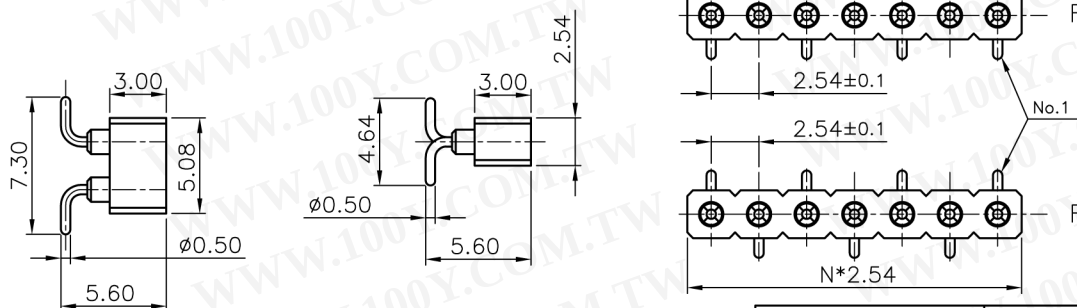

Dual rows

Single row

SMT TYPE

N: No. of contacts