


P. C. Board Connectors

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

2.54 (.100") PITCH P.C. BOARD CONNECTORS

5005, 5006 SERIES

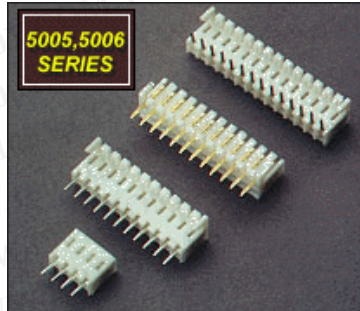

TOP ENTRY: 5005A-XS

SIDE ENTRY: 5005A-XR

BOTTOM ENTRY: 5006A-XDR


TERMINAL MATERIAL: 0.2T BRASS
PLATING: COPPER-
UNDERCOATED, TIN-PLATED

HOUSING MATERIAL: NYLON 66, UL 94V-
0, V-2

WAFER POST: BRASS, 0.64 (0.25")
SQUARE PIN, TIN-PLATED
CIRCUITS: 2-29

3.96 (.156") PITCH P.C. BOARD CONNECTORS

5017, 5018 SERIES

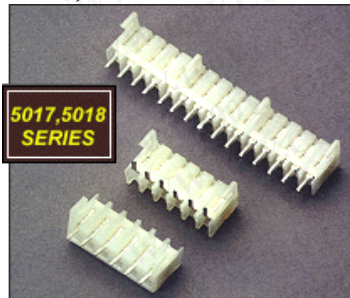

TOP ENTRY: 5017A-XS

SIDE ENTRY: 5017A-XR

BOTTOM ENTRY: 5018A-XDR


TERMINAL MATERIAL: 0.25T BRASS
PLATING: COPPER-
UNDERCOATED, TIN-
PLATED

HOUSING MATERIAL: NYLON 66, UL
94V-0, V-2

WAFER POST: BRASS, 1.14 (0.45")
SQUARE PIN, TIN-PLATED
CIRCUITS: 2-35

3.96 (.156") PITCH DISCONNECTABLE CONNECTORS

5004 SERIES

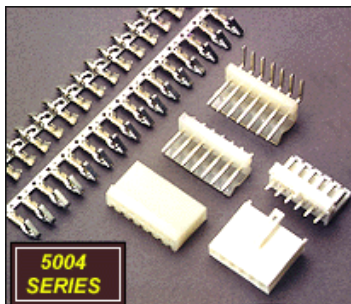

TERMINAL MATERIAL: 0.25T BRASS
PLATING: COPPER-
UNDERCOATED, TIN-PLATED
WIRE RANGE: SUITABLE FOR
AWG #18~#26
TWO TYPE ACCORDING TO
CUSTOMER'S DIFFERENT
CRIMPING TOOLS.

HOUSING MATERIAL: NYLON 66, UL 94V-

WAFER

0, V-2

POST: BRASS, 1.14 (0.45")

SQUARE PIN

CIRCUITS: 2-20

06, 12 (SUITABLE FOR


DISK

DRIVE POWER

CONNECTION)

5.08 (.200") PITCH DISCONNECTABLE DISK DRIVE POWER CONNECTOR

7004, 7001 SERIES



TERMINAL

MATERIAL: 0.25T BRASS

PLATING: COPPER-

UNDERCOATED, TIN-PLATED

HOUSING

MATERIAL: NYLON 66, UL 94V-0, V-2

WAFER

TOP ENTRY: ATW-04

SIDE ENTRY: ATW-04R

IDT TYPE: AHT-04

WIRE TO WIRE TYPE: AH-04,

ARH-04

CIRCUITS: 4

勝特力材料 886-3-5753170

勝特力电子(上海) 86-21-54151736

勝特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)