


电压V	减速比	电机转速	空载转速 rpm	空载电流 mA	负载电流 mA	负载转速 rpm	起动电压 V	堵转电流 mA	堵转力矩 gf.cm	额定力矩 gf.cm	功率W
12	118	16000	136	30	85	119	0.5	700	472	142	1.02
12	236	16000	68	30	85	59	0.5	700	944	283	1.02
12	302	16000	53	30	85	46	0.5	700	1208	362	1.02
12	603	16000	27	30	85	23	0.5	700	1929.6	579	1.02
12	42	16000	381	30	85	333	0.5	700	235.2	71	1.02
12	1030	16000	16	30	85	14	0.5	700	3296	989	1.02
6	118	8000	68	20	60	51	0.5	350	206.5	62	0.36
6	236	8000	34	20	60	25	0.5	350	413	124	0.36
6	302	8000	26	20	60	20	0.5	350	528.5	159	0.36
6	603	8000	13	20	60	10	0.5	350	1055.25	317	0.36
6	42	8000	190	20	60	143	0.5	350	73.5	22	0.36
6	1030	8000	8	20	60	6	0.5	350	1802.5	541	0.36
3	118	4000	34	10	40	21	0.5	150	88.5	27	0.12
3	236	4000	17	10	40	11	0.5	150	177	53	0.12
3	302	4000	13	10	40	8	0.5	150	226.5	68	0.12
3	603	4000	7	10	40	4	0.5	150	452.25	136	0.12
3	42	4000	95	10	40	60	0.5	150	31.5	9	0.12
3	1030	4000	4	10	40	2	0.5	150	772.5	232	0.12

尺寸单位: mm
重量: 10g左右

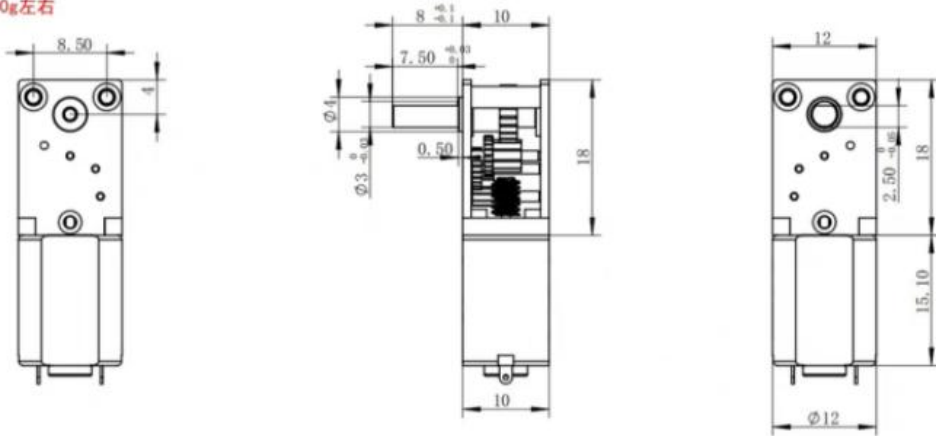

可搭配电机固定座

勝特力材料 886-3-5773766
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)