

Φ3.3mm Plastic 650nm Laser Module

$P_o < 1mW$

Features

1. APC (auto power control) IC inside
2. Low current consumption of the APC circuit
3. Much smaller LD module
4. Surge current protection
5. High quality lens for output beam



Absolute maximum ratings


Item	Symbol	Rating	Unit
Power supply voltage	V_{cc}	3.3	V
Laser Module optical output power	P_o	<1	mW
Operation temperature	T_{opr}	0~40	°C
Storage temperature	T_{stg}	0~60	°C

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Electrical and optical characteristics ($T_c=25^\circ\text{C}$)



Item	Symbol	Min.	Typ.	Max	Unit	Condition
Wavelength	λ	-	655	-	nm	$P_o=1mW$
Operation current	I_{op}	-	-	35	mA	$P_o=1mW V_{cc}=3V$
Operation voltage	V_{op}	2.5	-	3.3	Volt	
Laser Beam spot size at 10m						<20mm
Divergence angle						2 mrad
Mean time to failure (MTTF) 25°C						>10000 hrs

Outline dimensions (Units: mm)

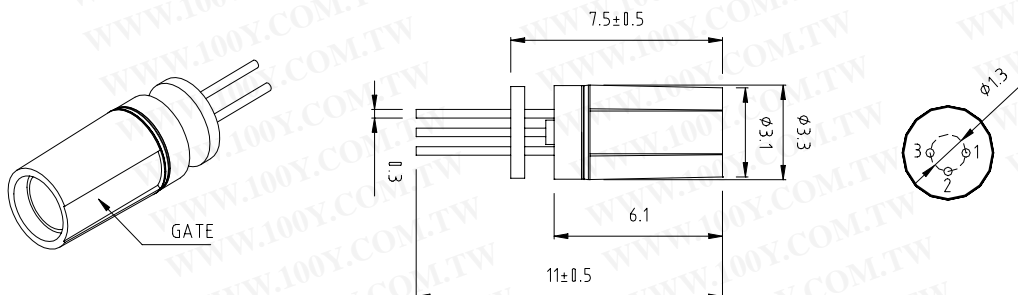

1. Do not look into the laser beam directly by eyes. The laser beam may cause severe damage to human eyes.
2. Optical Lens is made of plastic or glass. Do not contaminate lens by soiling, oil or chemical.

PIN Assignment:



A type : Heat sink stand (-)

B type :Heat sink stand (+)

Pin 1 : Vcc

Pin 2 : GND

Pin 3 : NC (No external connection)




勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Instruction manual

1. DC Power connection mode 1

A type :Heat sink stand (-)

B type :Heat sink stand (+)

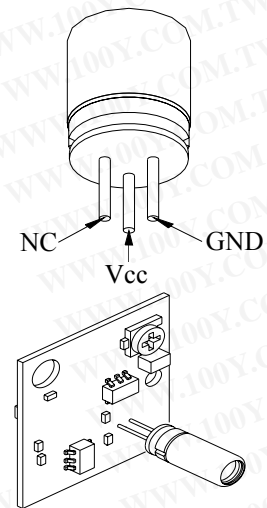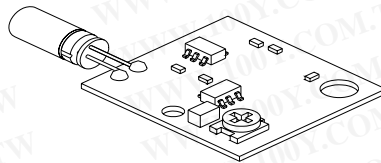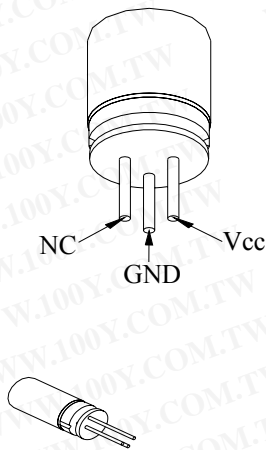

2. DC Power connection mode 2

