

# KA319

## Dual Comparator

### Features


- Operates from a single 5V supply
- Typically 80ns response time at  $\pm 15V$
- Open collector outputs : up to + 35V
- High output drive current : 25mA
- Inputs and outputs can be isolated from system ground
- Minimum fan-out of 2 (each side)
- Two independent comparators

### Description


The KA319 is a dual high speed voltage comparator designed to operate from a single + 5V supply up to  $\pm 15V$  dual supplies. Open collector of the output stage makes the KA319 compatible with RTL, DTL and TTL as well as capable of driving lamps and relays at currents up to 25mA. Typical response time of 80ns with  $\pm 15V$  power supplies makes the KA319 ideal for application in fast A/D converts, level shifters, oscillators, and multivibrators.



### Internal Block Diagram

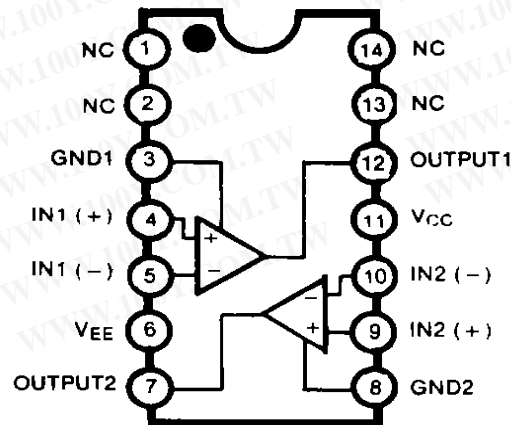

## Schematic Diagram

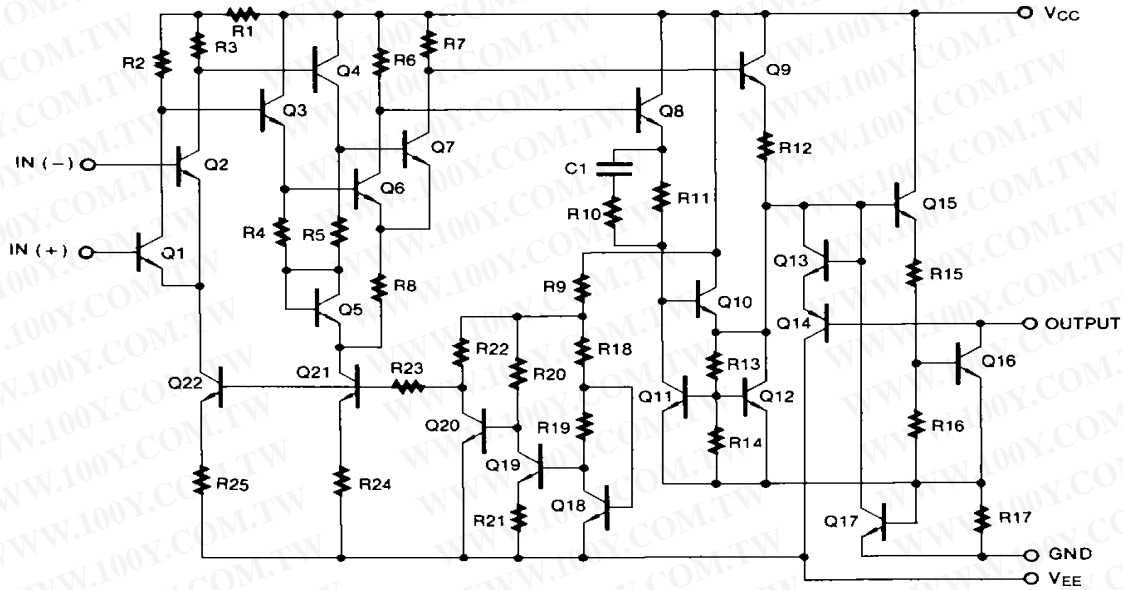

## Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Supply Voltage	VCC	36	V
Output to Negative Supply Voltage	VO - VEE	36	V
Ground to Negative Supply Voltage	VEE	25	V
Ground to Positive Supply Voltage	VCC	18	V
Differential Input Voltage	VI(DIFF)	5	V
Input Voltage	VI	±15	V
Output Short Circuit Duration	-	10	sec
Power Dissipation	PD	500	mW
Operating Temperature Range KA319	TOPR	0 ~ +70	°C
Storage Temperature Range	TSTG	-65 ~ +150	°C

## Electrical Characteristics

(VCC = +15V, VEE = -15V, TA = 25°C, unless otherwise specified)

Parameter	Symbol	Conditions	KA319			Unit	
			Min.	Typ.	Max.		
Input Offset Voltage (Note 1)	V <sub>IO</sub>	R <sub>S</sub> ≤ 5KΩ	-	2.0	8.0	mV	
			Note 3	-	-		10
Input Offset Current (Note 1)	I <sub>IO</sub>		-	10	200	nA	
			Note 3	-	-		300
Input Bias Current	I <sub>BIAS</sub>		-	150	1000	nA	
			Note 3	-	-		1200
Voltage Gain	G <sub>V</sub>	-	8	40	-	V/mV	
Response Time (Note 2)	T <sub>RES</sub>	VCC = ±15V	-	80	-	ns	
Saturation Voltage	V <sub>SAT</sub>	VCC=15V, VEE = -15V, V <sub>I</sub> ≤ -5mV, I <sub>O</sub> = 25mA	-	0.6	1.5	V	
		VCC = 4.5V, VEE = 0V V <sub>I</sub> ≤ -10mV, I <sub>O</sub> ≤ 3.2mA	Note3	-	0.3		0.4
Output Leakage Current	I <sub>O(LKG)</sub>	V <sub>I</sub> ≥ 5mV, V <sub>O(P)</sub> = 35V	-	-	-	μA	
		Note 3	-	-	-		
Input Voltage Range	V <sub>I(R)</sub>	Note 3	VCC = ±15V	-	±13	-	V
			VCC = 5V, VEE = 0V	1	-	3	
Differential Input Voltage	V <sub>I(DIFF)</sub>	-	-	-	±5	V	
Positive Supply Current	I <sub>CC1</sub>	VCC = 5V, VEE = 0V	-	3.6	-	mA	
Positive Supply Current	I <sub>CC2</sub>	VCC = ±15V	-	7.5	12.5	mA	
Negative Supply Current	I <sub>EE</sub>	VCC = ±15V	-	3	5	mA	

### Notes :

- The offset voltage and offset currents given are the maximum values required to drive the output within a volt of either supply with a 1mA load. Thus, these parameters define an error band and take into account the worst case effects of voltage gain and input impedance.
- The response time specified is for a 100mV input step with 5mV overdrive.
- KA319 : 0 ≤ TA ≤ +70°C

# Typical Performance Characteristics

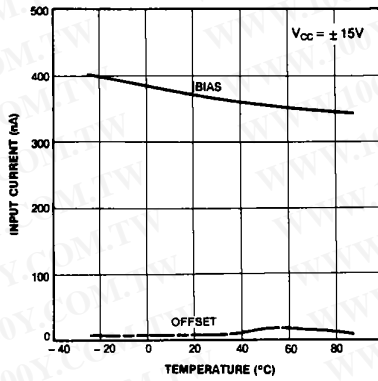


Figure 1. Input Current

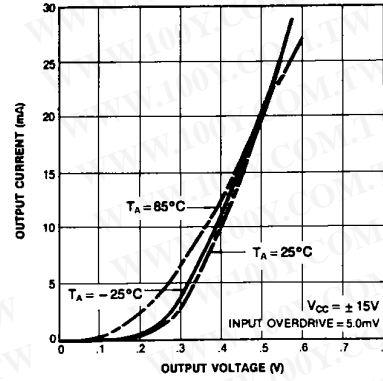


Figure 2. Output Saturation Voltage

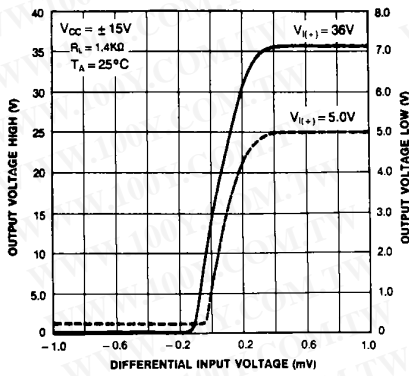


Figure 3. Transfer Function

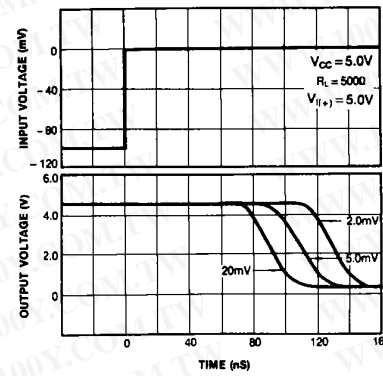


Figure 4. Response Time for Various Input Overdriver

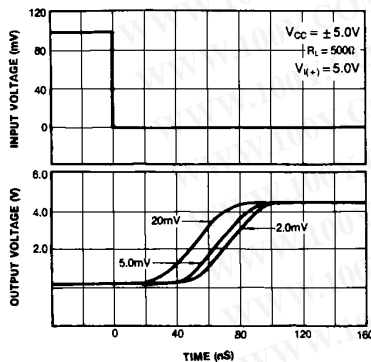


Figure 5. Response Time Various Input Overdriver

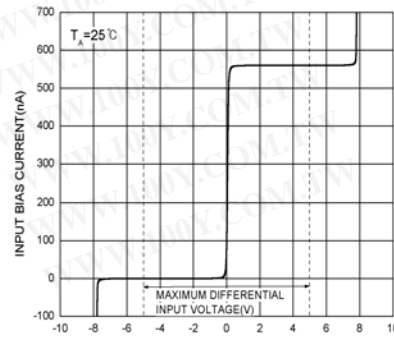


Figure 6. Input Characteristics

# Typical Performance Characteristics (continued)

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

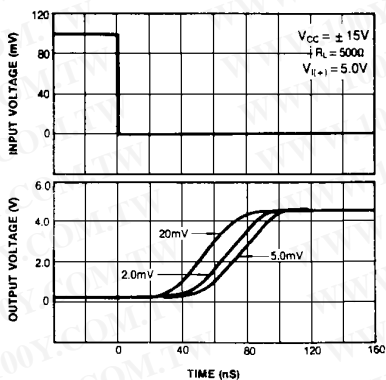


Figure 7. Response Time for Various Input Overdriver

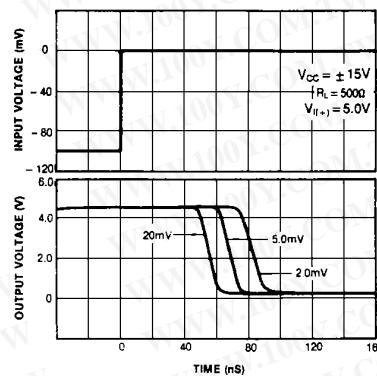


Figure 8. Response Time for Various Input Overdriver

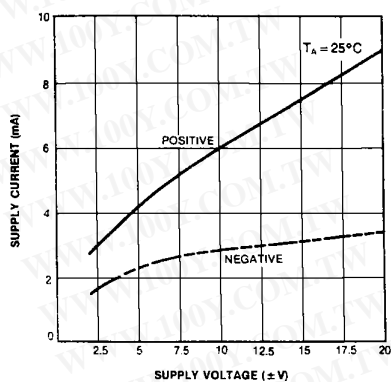


Figure 9. Supply Current

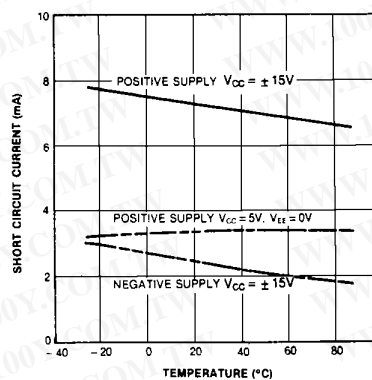


Figure 10. Supply Current

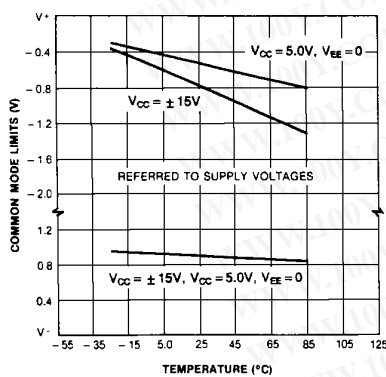


Figure 11. Common Mode Limits

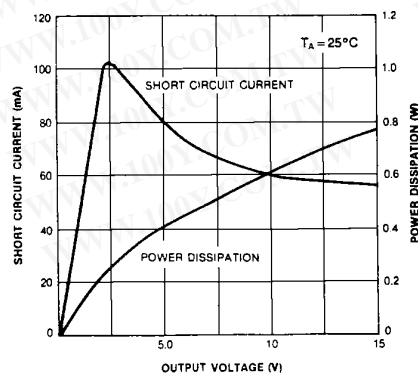



Figure 12. Output Limiting Characteristics

**Mechanical Dimensions**

**Package**

Dimensions in millimeters

**14-DIP**

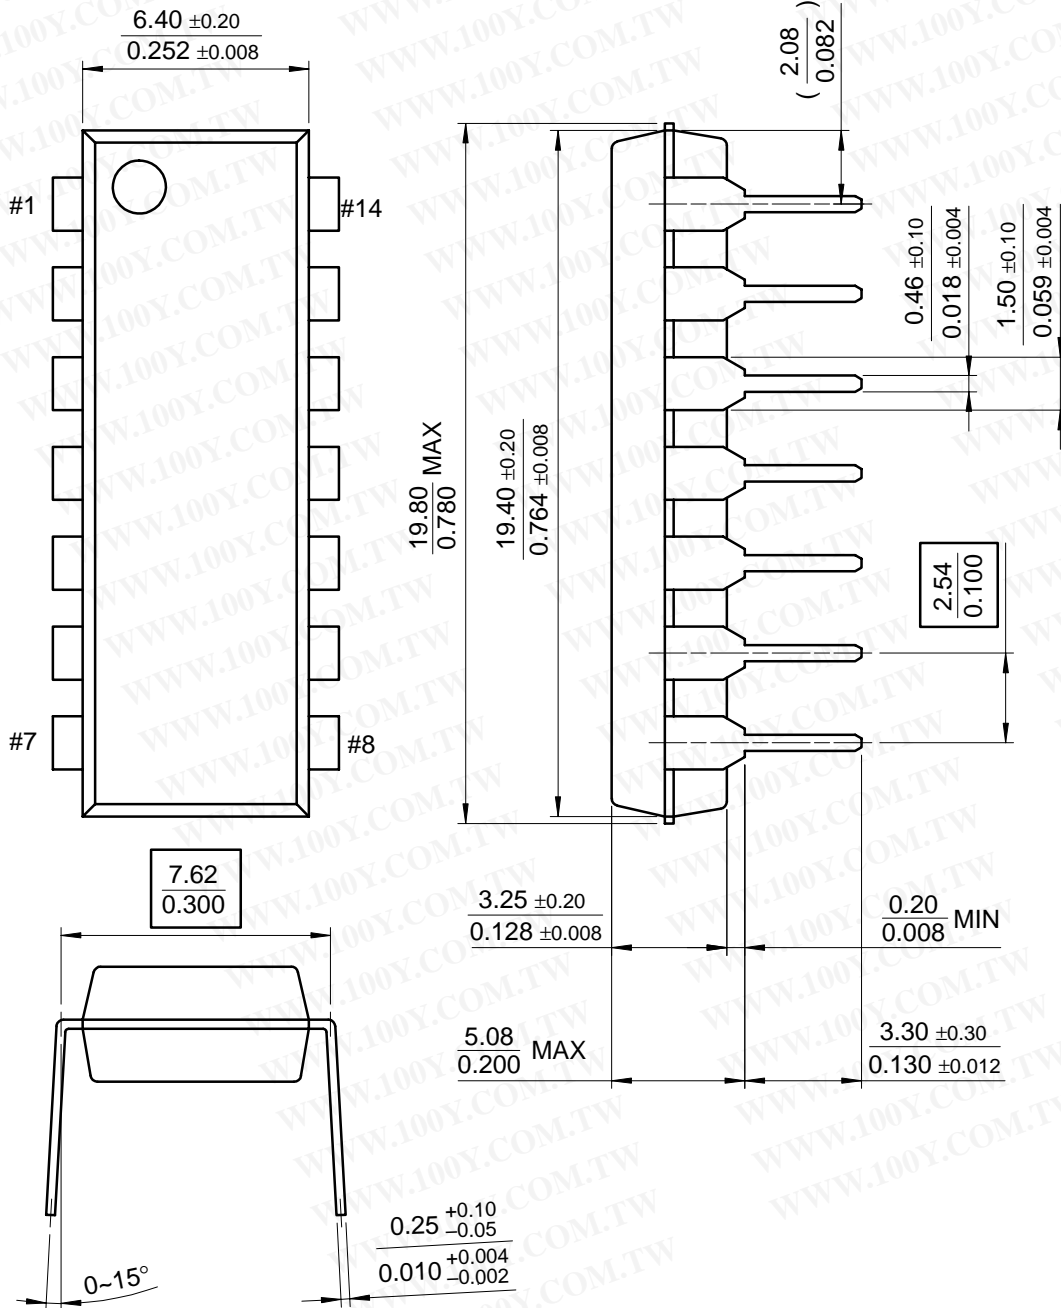


**Mechanical Dimensions** (Continued)

Package

Dimensions in millimeters

**14-SOP**

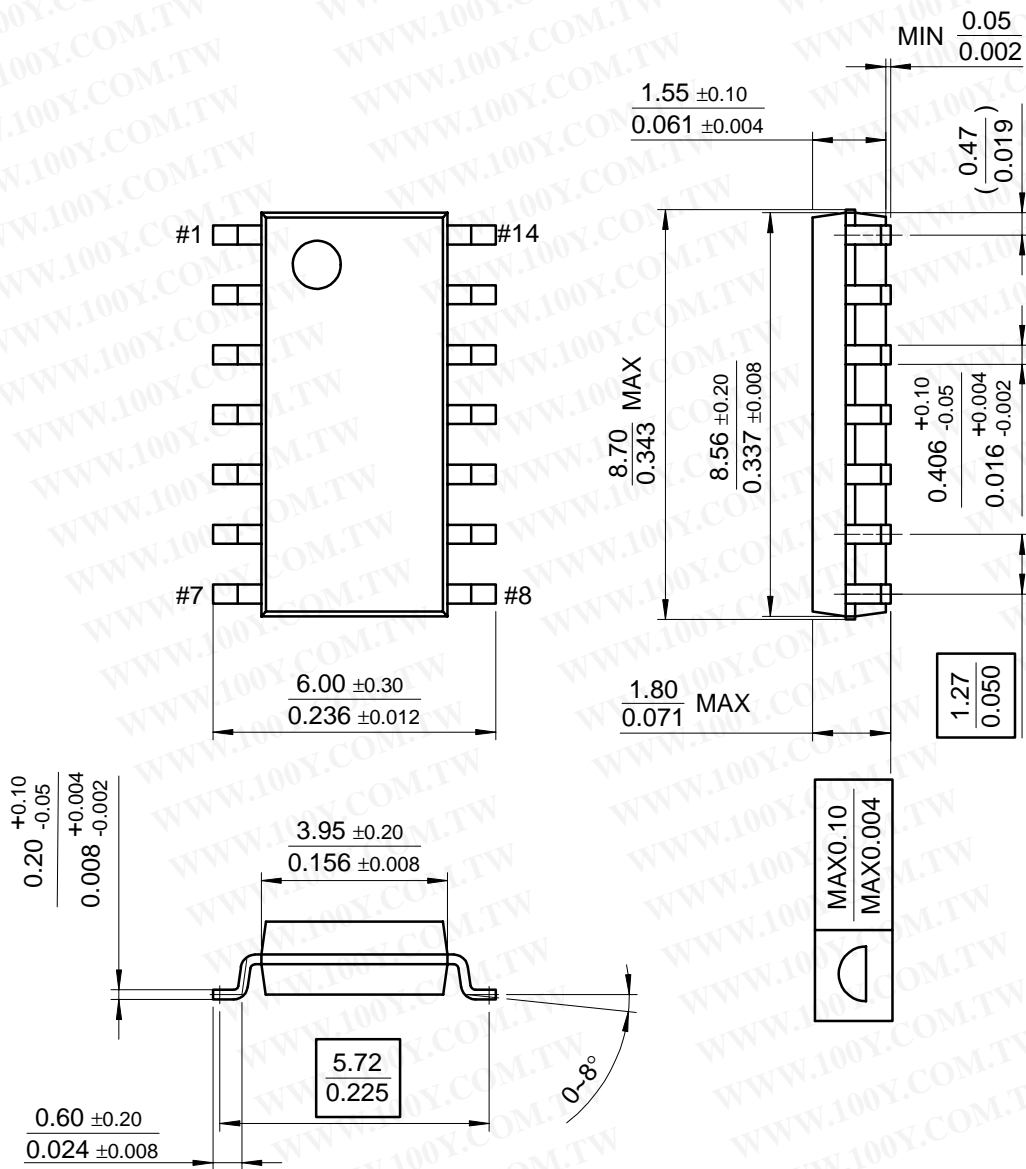

## Ordering Information

Product Number	Package	Operating Temperature
KA319	14-DIP	0 ~ + 70°C
KA319D	14-SOP	